

CEPARIO



CS002





Calpestabile da esterno rettangolare, corpo in alluminio e vetro temperato. Fissaggio diretto alla controcassa (in dotazione), senza dover aprire il prodotto. Disponibile in due differenti lunghezze, potenze e colorazioni di luce.

Rectangular outdoor walkable device, aluminum body and tempered glass. Direct fix to the outcase (supplied), without need to open the product. Available in two different lengths, powers and light colors.



MODEL	Nr. LED	POWER SUPPLY	LUMEN	POWER
CS002/050	6	230Vac	1800	18W
CS002/050RGB	6	24Vdc		18W
CS002/100	12	230Vac	3600	36W
CS002/100RGB	12	24Vdc		36W

COMPOSIZIONE CODICE/CODE SELECTION

MODEL	FINISHING	LENGHT	LED COLOR	LENS
CS002		050	 3200K	45 (45°)
		100	 4100K	
			 RGB	


- Equipaggiato con LED RGB di potenza totale 9W (350mA per canale) e disponibile con lente da 45°

Equipped with Power LED RGB total 9W (350mA each channel) available with 45° lens


 Acciaio Inox
Stainless steel



CS002/50

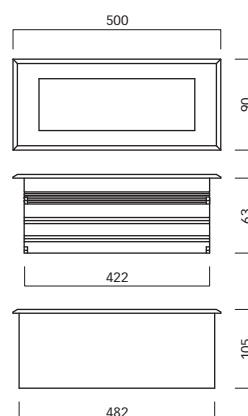

CS002/100

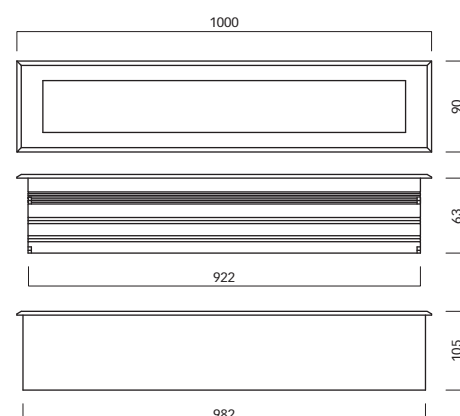

ACCESSORI/ACCESSORIES

SERIE **ALP**
TENSIONE COSTANTE
CONSTANT VOLTAGE



ALP060.24



ALP120.24



ALP150.24



AMP103

Amplifier



CTR112RGB

Controller RF
RGB 4 zones



CTR212

Decoder DALI

CS002/050	2	Min 2 - Max 6
CS002/050RGB	2	Min 2 - Max 6
CS002/100	1	Min 1 - Max 3
CS002/100RGB	1	Min 1 - Max 3

Alimentatori non inclusi/Drivers not included

Amplificatore e centraline non incluse/Amplifier and controllers not included