ARCHITECTURAL & CONTRACT LED COLLECTION

Dogi LED

Made for D-Factory Atelier - Milano

A new life...

Dogi LED presents itself as a highly professional partner on the lighting market and aims to become one of the most qualified players at an international level. In 2020, Dogi LED became part of the Kon.El.Co. S.p.A group and, thanks to the historicity of the GBC brand, the company completely renews itself by expanding its vision, production and logistics capacity. We invest daily in cutting-edge technologies and highly specialized personnel, to offer increasingly innovative and customized lighting solutions that meet the needs of the market, with services and new products in line with industry trends.

Artists of light, designers of spaces

The passion for light and the desire to create unique environments, makes us aware that every lighting project of any size and type, is unique and presents specific and characterizing challenges, towards which we have the readiness, preparation and structure, to provide the best response and solution. Dogi LED is the ideal and reliable partner for the realization of customized LED lighting projects, for which our experience, expertise and flexibility are the basis of the creation of unique and tailor-made solutions, to respond to every lighting need.

Illuminazione dedicata bancone Concierge - Milano

MISSION:
Sustainable and high-performance lighting

Our lighting solutions combine aesthetics, functionality and sustainability.
Choosing Dogi means investing in high-quality, energy-efficient and environmentally friendly LED lighting, our products in fact comply with current ERP regulations.
To learn more www.dogiled.it

Realizzazione Custom StripLed CRI>94 con Spotlight Libra cielo stellato

Dogi
GROUP
dogi

Logistics

To ensure a fast and functional service to our partners, we have implemented a solid logistics infrastructure. Our warehouse, covering an area of 7000 square meters, allows us to manage a large volume of products and respond promptly to customer requests. Thanks to an advanced management system, we are able to process orders promptly, ensuring the shipment of stock products within just 48 hours of receipt. This speed of execution allows us to optimize our operations, reduce waiting times and satisfy the needs of even the most demanding customers.

PRODUCTION

GBC Electronic Store installation

The modern light with essential lines:

Our linear pendant or ceiling lamps are made of high-quality aluminum and equipped with the latest generation LEDs. The minimalist and refined design combines with exceptional lighting performance, creating elegant and functional lighting for any environment. The choice of fine materials and attention to detail guarantee a product that is long-lasting and has a great aesthetic impact.

We offer a wide range of linear lamps that can be customized in terms of size, finishes and color temperature to meet even the most specific needs of a project in both residential, commercial and public settings.

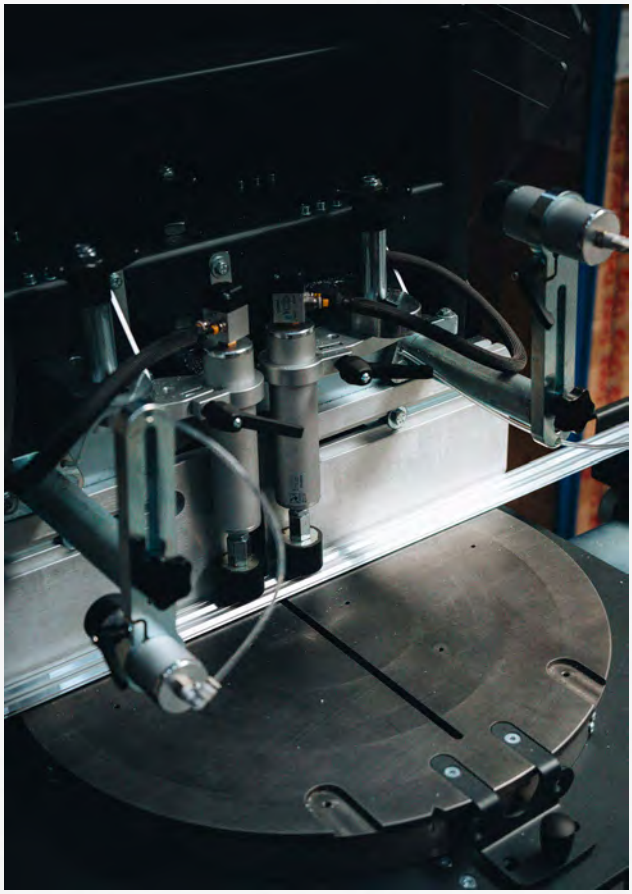

Elements which adapt to light:

The processing of materials is a fundamental part of Dogi LED's business, especially for aluminum profiles. The creations are carried out directly by our specialized staff with the help of professional equipment. The new industrial single-head cutting machine with ascending blade, in fact, allows straight or angular cuts of profiles with lengths of up to 4 linear meters, with millimetric precision, or the curvature of the same with widths from 0 to 40 mm in an S or circle shape, with diameters from 300 to 3000 mm.
it is possible to customize the finish on request, offering the customer the possibility of "custom finishing" painting.

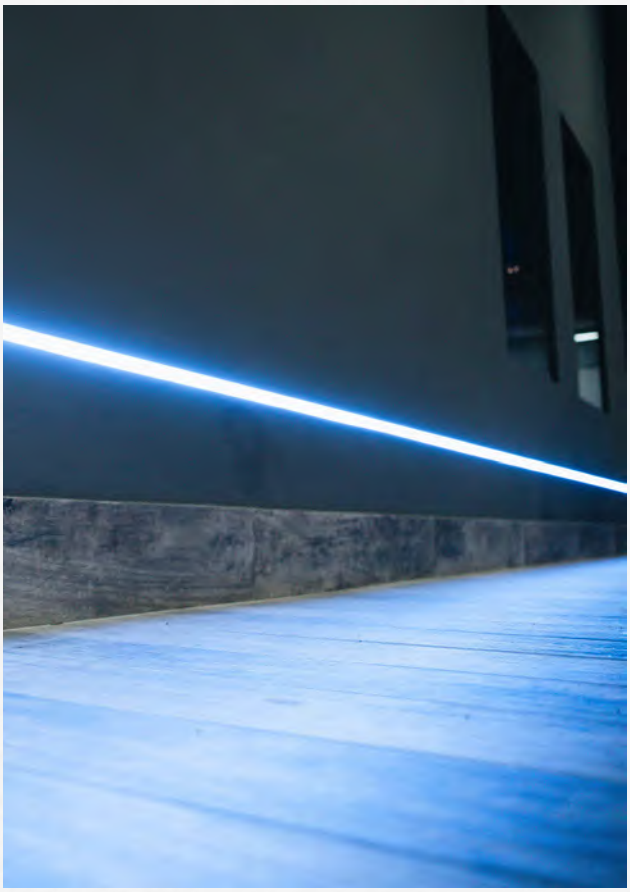

Custom profile cutting production

RESINATING

For outdoor use or in acidic and corrosive environments (swimming pools, fountains, marine areas, etc.), specific processing is required through the resin process that guarantees watertightness.
Dogi LED offers this type of service, on request, and on a specific selection of models. This production process is carried out within an environment with controlled temperature and humidity values, to guarantee the absence of defects (bubbles or air pockets).

Resin coating can be carried out on the profiles, making them suitable for outdoor use at various levels, to obtain specific IP protection ratings.

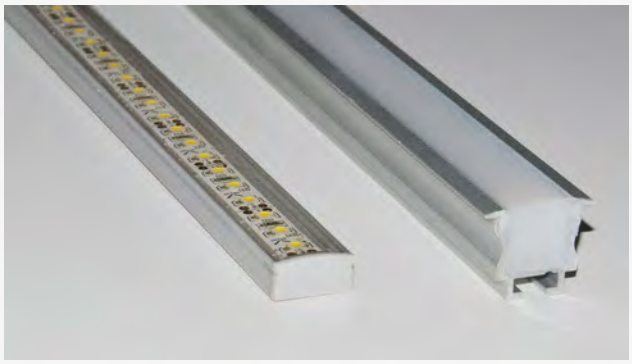

CUSTOM LIGHTING DESIGN

We think of light as a tailored suit to be sewn specifically for each situation and need. In Dogi LED nothing is left to chance and everything, every aspect of the project, is carefully evaluated in advance to obtain a lighting result of great aesthetic effect, easy practical management and excellent quality.
We are aware that light is an integral and characterizing part of the furniture, it is the identity and definition of spaces and environments, it is comfort and well-being for the people who live, work and socialize in these spaces.
Our team of lighting professionals supports the customer in every phase, from the beginning to the end of the project, we listen to their requests, analyze their needs and choose the best solution together. We virtually place the project within their environments, we present the customer with a virtual proposal of what we think could be the best light for their needs and we adapt it where necessary to their needs, modifying, integrating or rethinking the lighting fixtures to offer the best possible result and satisfaction.

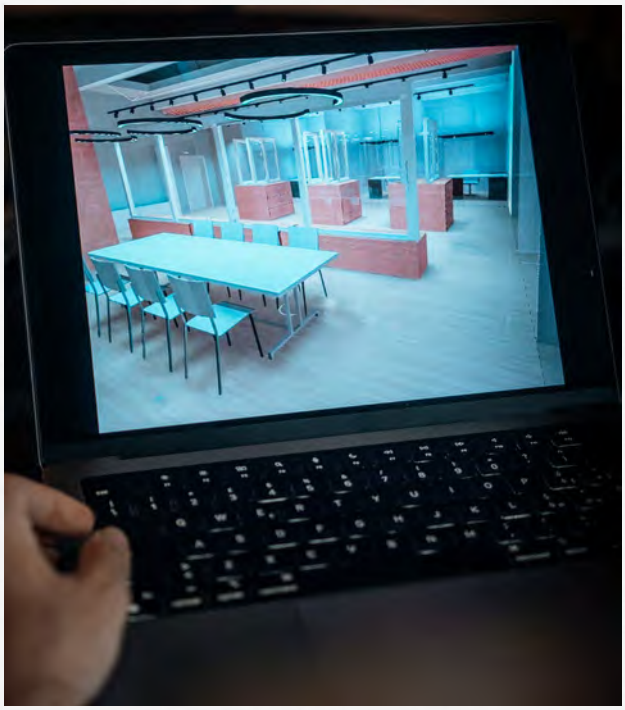

LIGHTING CONTROL AND MANAGEMENT SYSTEMS

Modern light must blend into environments and adapt to people's needs.
Dogi LED has fully understood this need, offering not only modern and high-performance lighting fixtures, but also all the components and accessories for light management (drivers, dimmers, controllers, etc.), with which to design and create manual and home automation control systems.
A team of internal professionals is always available to provide technical and design support to the customer, guiding them in the best choice of products and accessories to illuminate any type of environment, space or furniture.

CUSTOMER SERVICE

We want to be one of the references in the professional and architectural lighting market, offering our customers competent and as personalized as possible support, with quick and efficient responses to their requests. Our greatest strength lies in the deep knowledge of LED lighting products and technologies, our team of experts provides on request, assistance for the design and installation of our products, building a professional relationship with the customer that guarantees an effective Pre and Post sales service.

INDEX

DOWNLIGHT

PAG 16

Built-in solutions, to integrate light into any type of environment and furnishing style. Used for general, functional or accent lighting.

CEILING

PAG 74

Designer lighting fixtures, to give general and diffused light to every space, in a practical and efficient way.

APPLIQUE

PAG 98

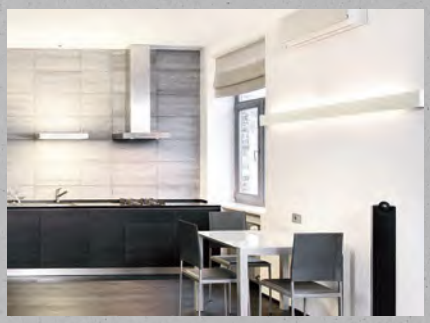

Decorative wall elements, with simple lines and customizable finishes, for stylish and elegant lighting.

SUSPENSION

PAG 108

A variety of shapes, sizes and colors that combine modernity and elegance to suit residential and commercial environments.

INDICE

TRACKS

PAG 158

Versatile and functional, ideal for any type of environment. The modern answer to every lighting need that follows the change of spaces and mobility of the accessories.

PROFILES

PAG 220

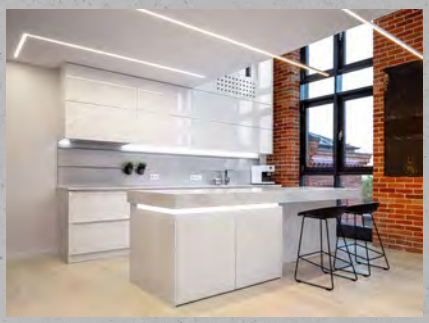

Designed and extruded specifically for lighting, in various shapes and sizes, complete with covers and accessories, both in single and kit versions or coupled with plasterboard. They customize the light in an essential way for every use and need.

STRIPS

PAG 414

A modern and wide selection of products and models, for the management of every type of project, in which light also becomes a primary furnishing element and definition of the environment.

DRIVER AND CONTROLLER

PAG 516

Electronic components and parts, to control light and allow its integration into environments.

DOWNLIGHT

BUILT-IN SOLUTIONS

LIBRA S PAG 18

CELSI COB LUXY PAG 24

CELSI HONEY PAG 34

VALIER ROUND PAG 40

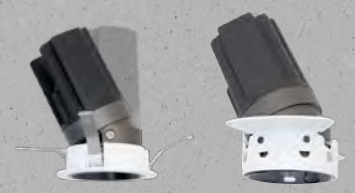

VALIER SQUARE PAG 46

ZENO ROUND PAG 50

ZENO NECK PAG 56

FALIER PAG 60

FALIER LUXY PAG 66

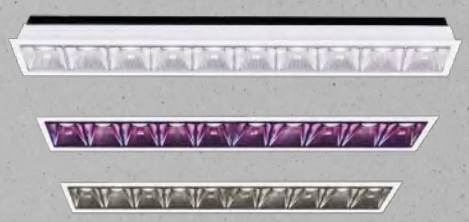

FALIER LUXY GHOST PAG 70

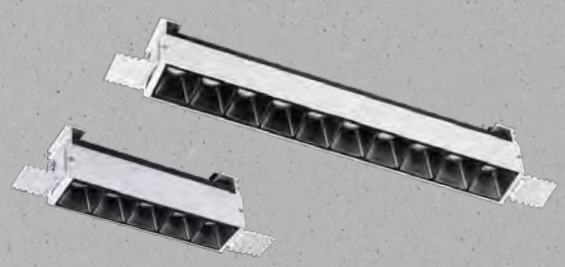

Dogi LED

LIBRA S

DOWNLIGHT

LB01

A
WHITE

C
BLACK

E
CHROME

D
GOLD

G
SILVER

R
GOLD PINK

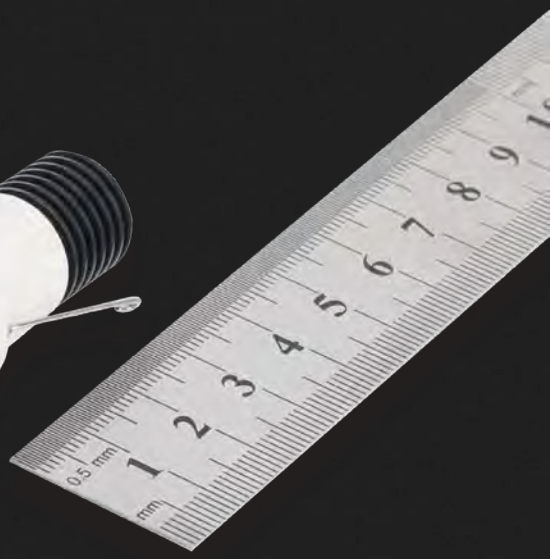

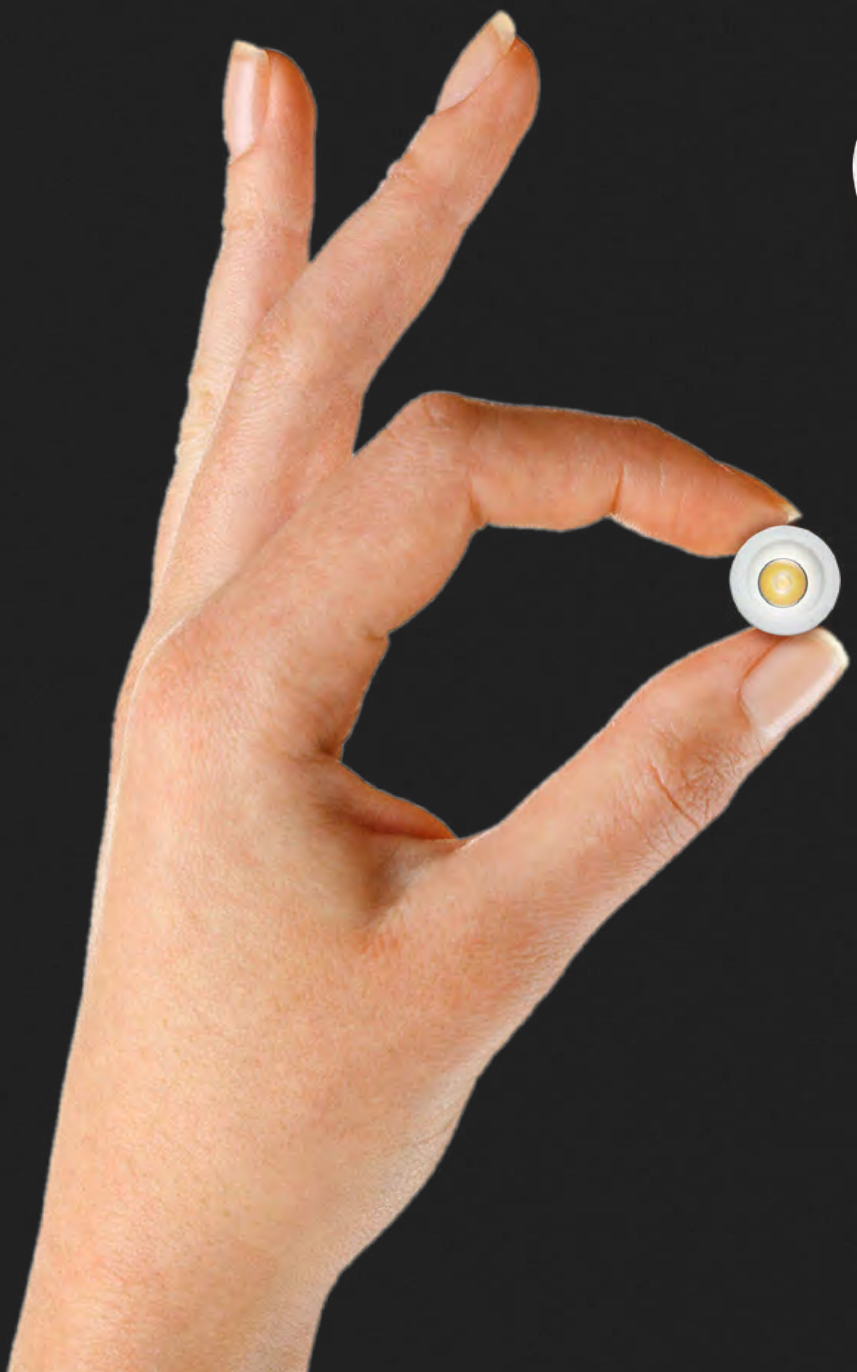

Ø22 mm

3000K

CALDA
WARM

4000K

NATURALE
NATURAL

LIBRA S

MINI ROUND RECESSED SPOTLIGHT

CRI >90 | 2W | IP44 | ALU | More colors | POWER Opzionale

2W

Power	2 W
Input voltage	700 mA (3V)
Installation Hole	Ø19 mm
Dimension	Ø22xH.32 mm



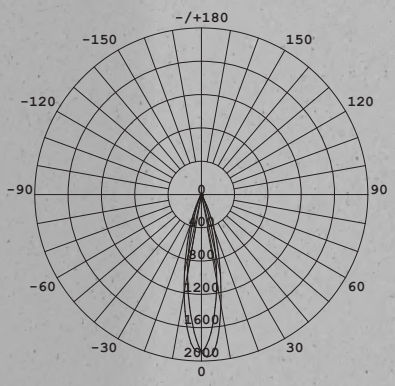

3000K
155 lm

Parable	Code
	LB012W1AXA
	LB012W1AXC
	LB012W1AXE
	LB012W1AXD
	LB012W1AXG
	LB012W1AXR

4000K
160 lm

Parable	Code
	LB012W9AXA
	LB012W9AXC
	LB012W9AXE
	LB012W9AXD
	LB012W9AXG
	LB012W9AXR

Dogi LED

CELSI COB LUXY

DOWNLIGHT

Ø70

Ø85

Ø95

7W

12W

18W

FINE LIVING
LIVING

CELSI ROUND COB LUXY

COB WHITE ROUND RECESSED SPOTLIGHT

CRI >90 | IP20 | 36° | ALU | More colors | POWER Included

7W

12W

18W

7W

Power	7 W
Input voltage	150 mA (36V)
Installation Hole	Ø60 mm
Dimension	Ø70xH.55 mm
Driver	Included

55

Ø70

Ø60 mm

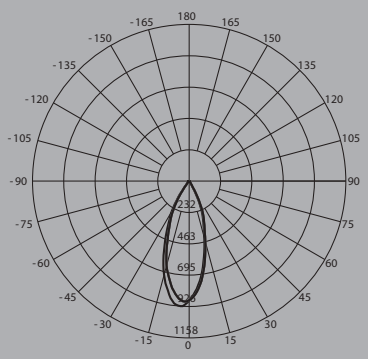

Body		Parable	Code
	3000K 630 lm		DW156-7-WWC
			DW156-7-WIC
			DW156-7-WBC
			DW156-7-WGC
			DW156-7-WCC
	4000K 690 lm		DW156-7-WWN
			DW156-7-WIN
			DW156-7-WBN
			DW156-7-WGN
			DW156-7-WCN

12W

Power	12 W
Input voltage	300 mA (36V)
Installation Hole	Ø75 mm
Dimension	Ø85xH.65 mm
Driver	Included



65

Ø85

Ø75 mm



Body		Parable	Code
	3000K 1080 lm		DW156-12-WWC
			DW156-12-WIC
			DW156-12-WBC
			DW156-12-WGC
			DW156-12-WCC
	4000K 1180 lm		DW156-12-WWN
			DW156-12-WIN
			DW156-12-WBN
			DW156-12-WGN
			DW156-12-WCN

18W

Power	18 W
Input voltage	450 mA (36V)
Installation Hole	Ø85 mm
Dimension	Ø95xH.80 mm
Driver	Included



80

Ø95

Ø85 mm



Body		Parable	Code
	3000K 1620 lm		DW156-18-WWC
			DW156-18-WIC
			DW156-18-WBC
			DW156-18-WGC
			DW156-18-WCC
	4000K 1780 lm		DW156-18-WWN
			DW156-18-WIN
			DW156-18-WBN
			DW156-18-WGN
			DW156-18-WCN

CELSI ROUND COB LUXY

ROUND RECESSED SPOTLIGHT COB BLACK

CRI >90 | IP20 | 36° | ALU | More colors | POWER Included

7W 12W 18W

7W

Power	7 W
Input voltage	150 mA (36V)
Installation Hole	Ø60 mm
Dimension	Ø70xH.55 mm
Driver	Included



55

Ø70

Ø60 mm

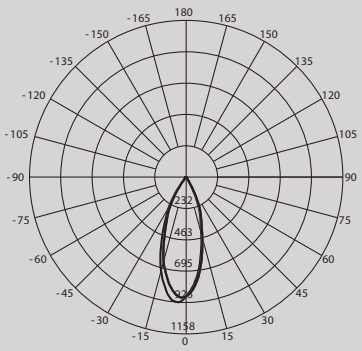

Body		Parable	Code
	3000K 630 lm		DW156-7-BWC
			DW156-7-BIC
			DW156-7-BBC
			DW156-7-BGC
			DW156-7-BCC
	4000K 690 lm		DW156-7-BWN
			DW156-7-BIN
			DW156-7-BBN
			DW156-7-BGN
			DW156-7-BCN

12W

Power	12 W
Input voltage	300 mA (36V)
Installation Hole	Ø75 mm
Dimension	Ø85xH.65 mm
Driver	Included

65

Ø85

Ø75 mm



Body		Parable	Code
	3000K 1080 lm		DW156-12-BWC
			DW156-12-BIC
			DW156-12-BBC
			DW156-12-BGC
			DW156-12-BCC
	4000K 1180 lm		DW156-12-BWN
			DW156-12-BIN
			DW156-12-BBN
			DW156-12-BGN
			DW156-12-BCN

18W

Power	18 W
Input voltage	450 mA (36V)
Installation Hole	Ø85 mm
Dimension	Ø95xH.80 mm
Driver	Included



80

Ø95

Ø85 mm



Body		Parable	Code
	3000K 1620 lm		DW156-18-BWC
			DW156-18-BIC
			DW156-18-BBC
			DW156-18-BGC
			DW156-18-BCC
	4000K 1780 lm		DW156-18-BWN
			DW156-18-BIN
			DW156-18-BBN
			DW156-18-BGN
			DW156-18-BCN

Dogio LED

CELSI HONEY

DOWNLIGHT

DW146	DW147	DW148	DW149
9W	**15W**	**20W**	**30W**
Ø85	**Ø130**	**Ø160**	**Ø175**

DRIVER SELECT

CALDA
WARM

NATURALE
NATURAL

FREDDA
COLD



FILTRO HONEYCOMB
(ALVEOLARE)

Reduces
glare
without altering
color rendering

CELSI HONEY

ROUND RECESSED SPOTLIGHT COB CCT CON FILTERHONEYCOMB

CRI >90 | IP20 | 60° | ALU | POWER Included

9W

Power	9 W
Input voltage	200 mA (24 - 40V)
Installation Hole	Ø80 mm
Dimension	Ø85xH.45 mm
Driver	Included

Body	CCT		Code
	2700K	540 lm	DW146
	4000K	590 lm	
	6000K	650 lm	

47

Ø90

Ø80 mm







15W

Power	15 W
Input voltage	350 mA (24 - 40V)
Installation Hole	Ø95 mm
Dimension	Ø130xH.52 mm
Driver	Included

Body	CCT		Code
	2700K	900 lm	DW147
	4000K	990 lm	
	6000K	1090 lm	

52

Ø130

Ø120 mm







ANNUAL REPORT

Dogi LED

20W

Power	20 W
Input voltage	500 mA (24 - 40V)
Installation Hole	Ø145 mm
Dimension	Ø160xH.60 mm
Driver	Included

Body	CCT		Code
	2700K	1200 lm	DW148
	4000K	1320 lm	
	6000K	1450 lm	



Ø160

60

Ø145 mm

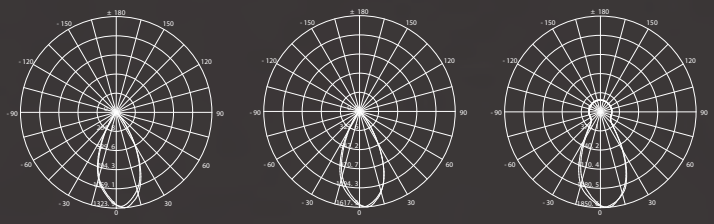

30W

Power	30 W
Input voltage	750 mA (24 - 40V)
Installation Hole	Ø160 mm
Dimension	Ø175xH.63 mm
Driver	Included

Body	CCT		Code
	2700K	1800 lm	DW149
	4000K	1980 lm	
	6000K	2150 lm	



Ø175

63

Ø160

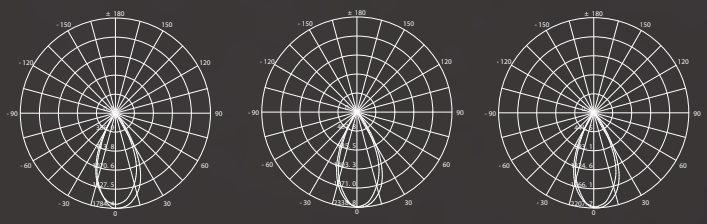

Dogi LED

VALIER

DOWNLIGHT

ROUND

SQUARE

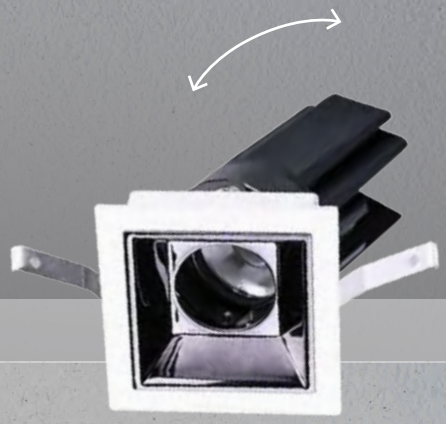

SURFACE

TRIMLESS

VALIER ROUND

ROUND RECESSED SPOTLIGHT ORIENTABLE

CRI >92 | 10W | IP20 | ALU | POWER Included

36°

Power	10 W
Input voltage	250 mA (37V)
Installation Hole	Ø55 mm
Dimension	Ø65xH.96 mm
Driver	Included

Body	Parable	Code
3000K 740 lm		DWRO400-10WWC36
		DWRO400-10WBC36
4000K 820 lm		DWRO400-10WWN36
		DWRO400-10WBN36



96

Ø65

25°

350°

Ø55 mm

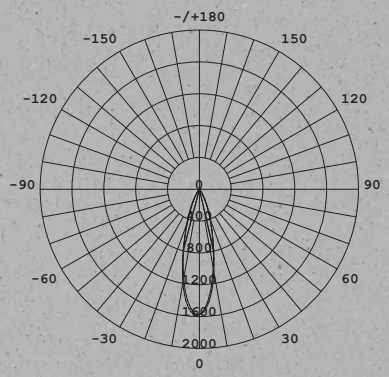

50°

Power	10 W
Input voltage	250 mA (37V)
Installation Hole	Ø55 mm
Dimension	Ø65xH.96 mm
Driver	Included

Body	Parable	Code
3000K 740 lm		DWRO400-10WWC50
		DWRO400-10WBC50
4000K 820 lm		DWRO400-10WWN50
		DWRO400-10WBN50



96

Ø65

25°

350°

Ø55 mm

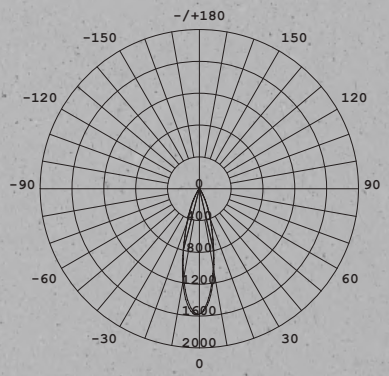

Dogi LED

VALIER ROUND GHOST

ROUND RECESSED SPOTLIGHT ORIENTABLE TRIMLESS

CRI >92 | 10W | IP20 | ALU | POWER Included

36°

Power	10 W
Input voltage	250 mA (37V)
Installation Hole	Ø55 mm
Dimension	Ø50xH.96 mm
Driver	Included

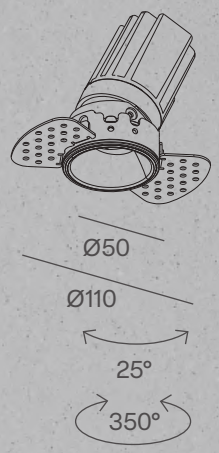

Body	Parable	Code
3000K, 740 lm		DWROT400-10WC36
		DWROT400-10BC36
4000K, 820 lm		DWROT400-10WN36
		DWROT400-10BN36

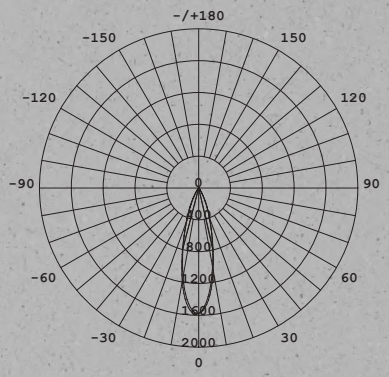

50°

Power	10 W
Input voltage	250 mA (37V)
Installation Hole	Ø55 mm
Dimension	Ø50xH.96 mm
Driver	Included

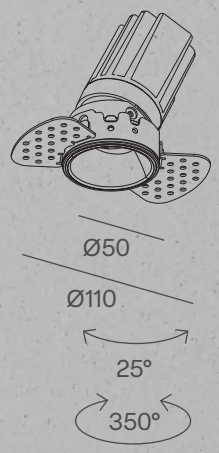

Body	Parable	Code
3000K, 740 lm		DWROT400-10WC50
		DWROT400-10BC50
4000K, 820 lm		DWROT400-10WN50
		DWROT400-10BN50

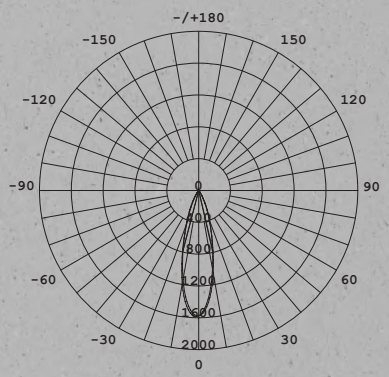

VALIER SQUARE

SQUARE RECESSED SPOTLIGHT ORIENTABLE

CRI >92 | 10W | IP20 | ALU | POWER Included

36°

Power	10 W
Input voltage	250 mA (37V)
Installation Hole	55x55 mm
Dimension	65x65x100 mm
Driver	Included



55x55 mm

Body	Parable	Code
3000K 740 lm		DWSO400-10WWC36
		DWSO400-10WBC36
4000K 820 lm		DWSO400-10WWN36
		DWSO400-10WBN36

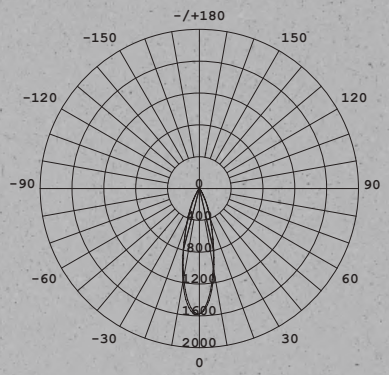

50°

Power	10 W
Input voltage	250 mA (37V)
Installation Hole	55x55 mm
Dimension	65x65x100 mm
Driver	Included



55x55 mm

Body	Parable	Code
3000K 740 lm		DWSO400-10WWC50
		DWSO400-10WBC50
4000K 820 lm		DWSO400-10WWN50
		DWSO400-10WBN50

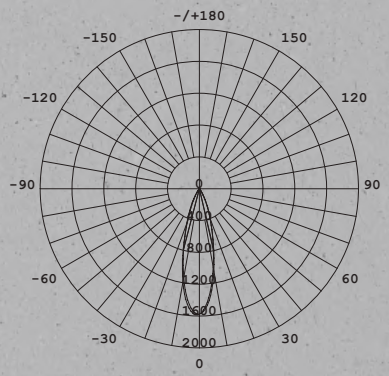

Dogi LED

VALIER SQUARE GHOST

SQUARE RECESSED SPOTLIGHT ORIENTABLE TRIMLESS

CRI >92 | 10W | IP20 | ALU | POWER Included

36°

Power	10 W
Input voltage	250 mA (37V)
Installation Hole	55x55 mm
Dimension	65x65x100 mm
Driver	Included

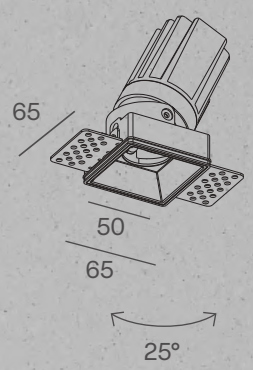

55x55 mm

Body	Parable	Code
3000K, 740 lm		DWSOT400-10WC36
		DWSOT400-10BC50
4000K, 820 lm		DWSOT400-10WN36
		DWSOT400-10BN36

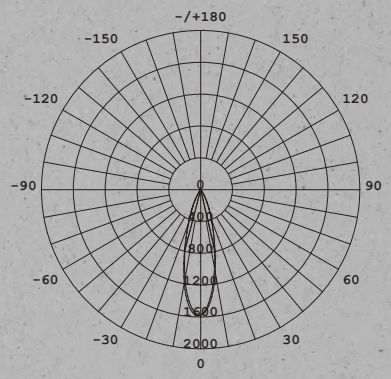

50°

Power	10 W
Input voltage	250 mA (37V)
Installation Hole	55x55 mm
Dimension	65x65x100 mm
Driver	Included

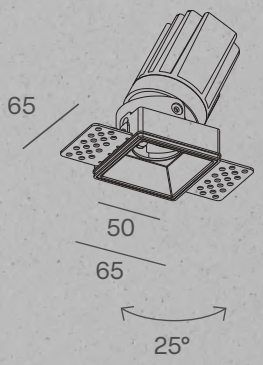

55x55 mm

Body	Parable	Code
3000K, 740 lm		DWSOT400-10WC50
		DWSOT400-10BC50
4000K, 820 lm		DWSOT400-10WN50
		DWSOT400-10BN50

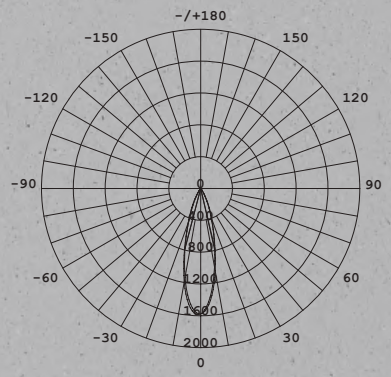

ZENO ROUND

DOWNLIGHT

NEW / ARRIVALS
AUTIMN

ZENO ROUND HP

ROUND RECESSED SPOTLIGHT ORIENTABLE

15W **30W** **40W**



CALDA
WARM

NATURALE
NATURAL

ZENO ROUND HP 15W

ROUND RECESSED SPOTLIGHT ORIENTABLE

CRI >90 | 15W | IP20 | ALU | POWER Included

25°

Power	15 W
Input voltage	350 mA (36V)
Installation Hole	Ø55 mm
Dimension	Ø60xH.120 mm
Driver	Included

Body	Parable	Code
	3000K 1100 lm	DW500-15C25
	4000K 1131 lm	DW500-15N25



Ø55 mm

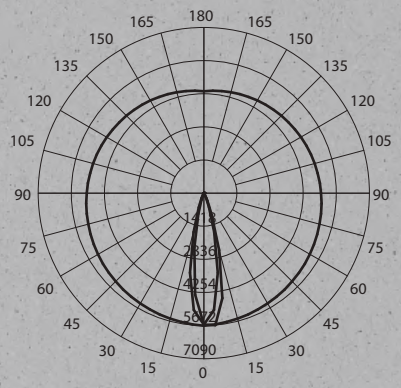

50°

Power	15 W
Input voltage	350 mA (36V)
Installation Hole	Ø55 mm
Dimension	Ø60xH.120 mm
Driver	Included

Body	Parable	Code
	3000K 1100 lm	DW500-15C50
	4000K 1131 lm	DW500-15N50



Ø55 mm

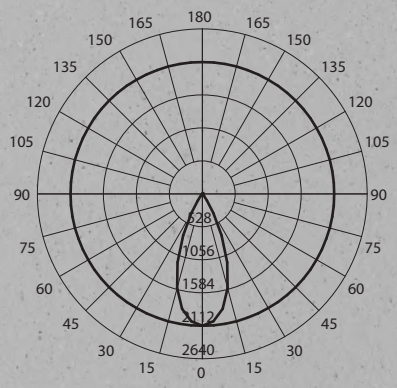

ZENO ROUND HP 30W

ROUND RECESSED SPOTLIGHT ORIENTABLE

CRI >90 | 30W | IP20 | ALU | POWER Included

Power	30 W
Input voltage	700 mA (36V)
Installation Hole	Ø80 mm
Dimension	Ø80xH.140 mm
Driver	Included

Body	Parable	Code
	3000K, 2760 lm	DW500-30C25
	4000K, 2800 lm	DW500-30N25



Ø80 mm

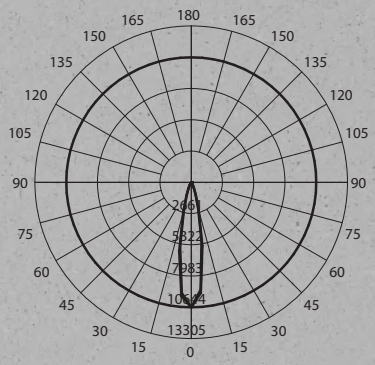

Power	30 W
Input voltage	700 mA (36V)
Installation Hole	Ø80 mm
Dimension	Ø80xH.140 mm
Driver	Included

Body	Parable	Code
	3000K, 2760 lm	DW500-30C50
	4000K, 2800 lm	DW500-30N50



Ø80 mm

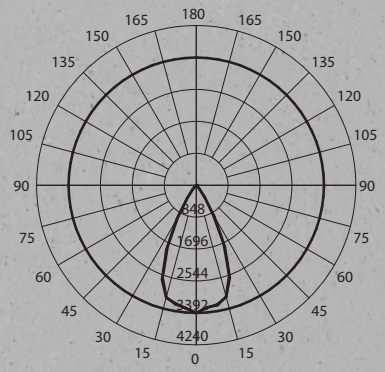

ZENO ROUND HP 40W

ROUND RECESSED SPOTLIGHT ORIENTABLE

CRI >90 | 40W | IP20 | ALU | POWER Included

25°

Power	40 W
Input voltage	1050 mA (36V)
Installation Hole	Ø95 mm
Dimension	Ø110xH.145 mm
Driver	Included

Body	Parable	Code
	3000K, 3480 lm	DW500-40C25
	4000K, 3510 lm	DW500-40N25



Ø95 mm

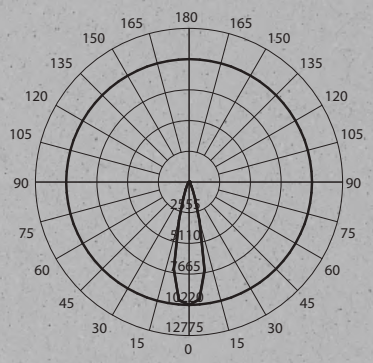

50°

Power	40 W
Input voltage	1050 mA (36V)
Installation Hole	Ø95 mm
Dimension	Ø110xH.145 mm
Driver	Included

Body	Parable	Code
	3000K, 3480 lm	DW500-40C50
	4000K, 3510 lm	DW500-40N50



Ø95 mm

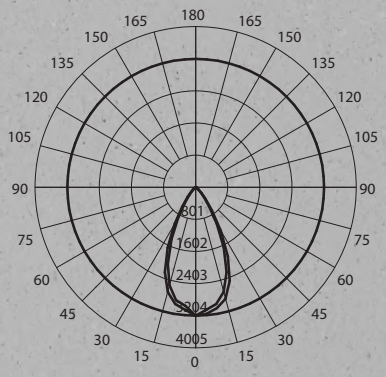

Dogi LED

ZENO NECK

DOWNLIGHT

CCT

CALDA
WARM

NATURALE
NATURAL

FREDDA
COLD

ZENO NECK

ROUND CCT RECESSED SPOTLIGHT ORIENTABLE AND REMOVABLE

CRI >90 | 10W | IP20 | ALU | POWER Included

24°

Power	10 W
Input voltage	250 mA (36V)
Installation Hole	Ø75 mm
Dimension	Ø85xH.95 mm
Driver	Included

Code

CCT		
2700K	850 lm	DW500WEO-10CCT
4000K	935 lm	
6000K	1000 lm	

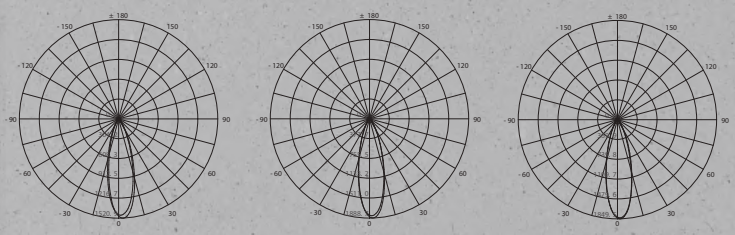

Dogi LED

FALIER

DOWNLIGHT

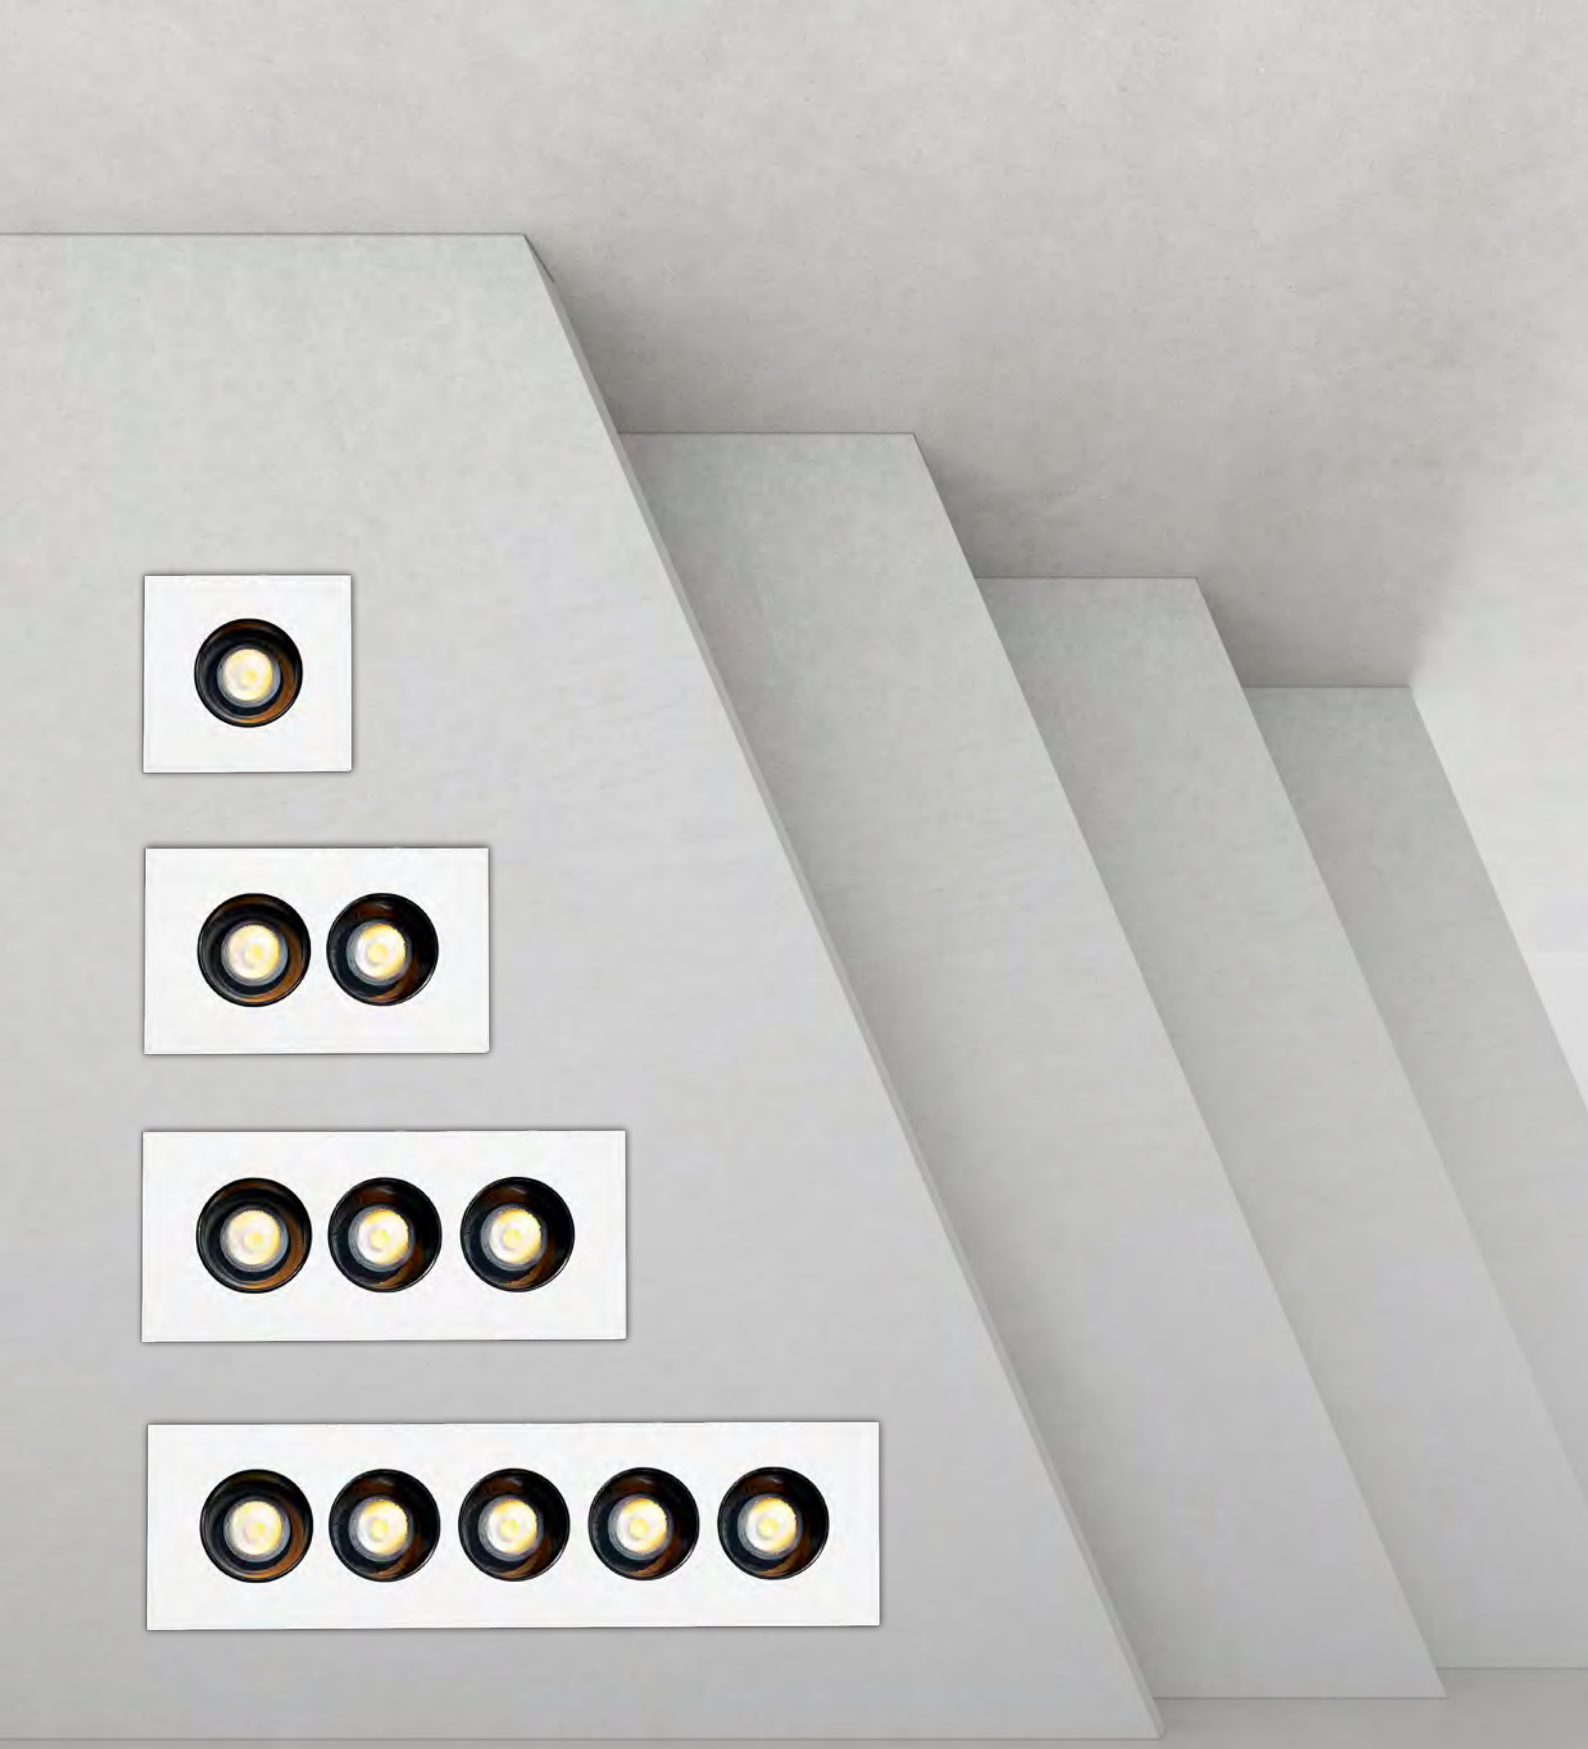

CCT

CALDA
WARM



NATURALE
NATURAL

FREDDA
COLD

Dogi LED

SQUARE CCT RECESSED BLADE

CRI >90 | 24° | IP20 | ALU | POWER Included

2W

Power	2 W
Input voltage	250 mA (6V)
Installation Hole	40x35 mm
Dimension	43x40x43 mm
Driver	Included



40x35 mm

Body	CCT		Code
	3000K	90 lm	FL101WCCT
	4000K	100 lm	
	6000K	110 lm	
	3000K	90 lm	FL101BCCT
	4000K	100 lm	
	6000K	110 lm	

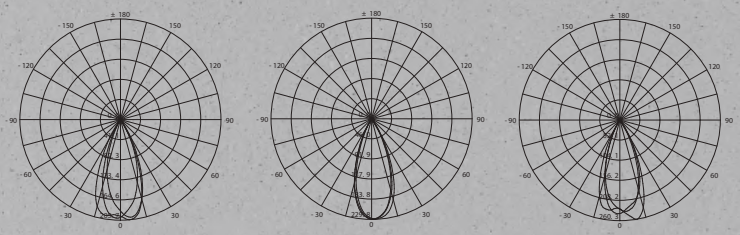

4W

Power	4 W
Input voltage	250 mA (6V)
Installation Hole	68x35 mm
Dimension	72x40x43 mm
Driver	Included



68x35 mm

Body	CCT		Code
	3000K	180 lm	FL102WCCT
	4000K	200 lm	
	6000K	220 lm	
	3000K	180 lm	FL102BCCT
	4000K	200 lm	
	6000K	220 lm	

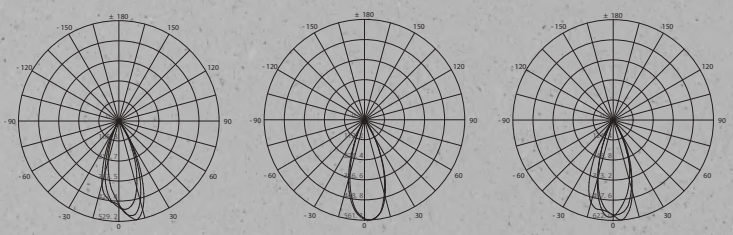

6W

Power	6 W
Input voltage	250 mA (6V)
Installation Hole	96x35 mm
Dimension	140x40x43 mm
Driver	Included



96x35 mm

Body			Code
	CCT 3000K	270 lm	FL103WCCT
	CCT 4000K	295 lm	
	CCT 6000K	325 lm	
	CCT 3000K	270 lm	FL103BCCT
	CCT 4000K	295 lm	
	CCT 6000K	325 lm	

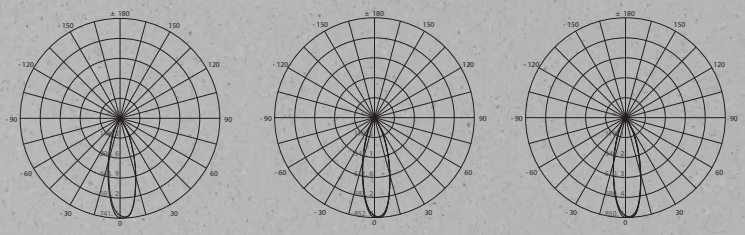

10W

Power	10 W
Input voltage	250 mA (6V)
Installation Hole	145x35 mm
Dimension	156x40x43 mm
Driver	Included

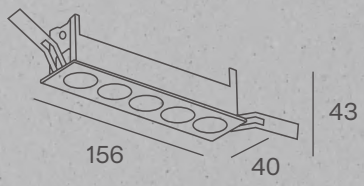

145x35 mm

Body			Code
	CCT 3000K	450 lm	FL105WCCT
	CCT 4000K	495 lm	
	CCT 6000K	540 lm	
	CCT 3000K	450 lm	FL105BCCT
	CCT 4000K	495 lm	
	CCT 6000K	540 lm	

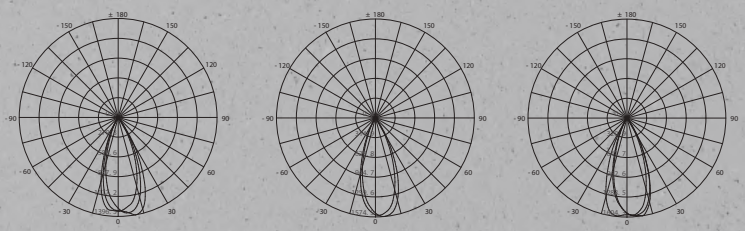

Dogi LED

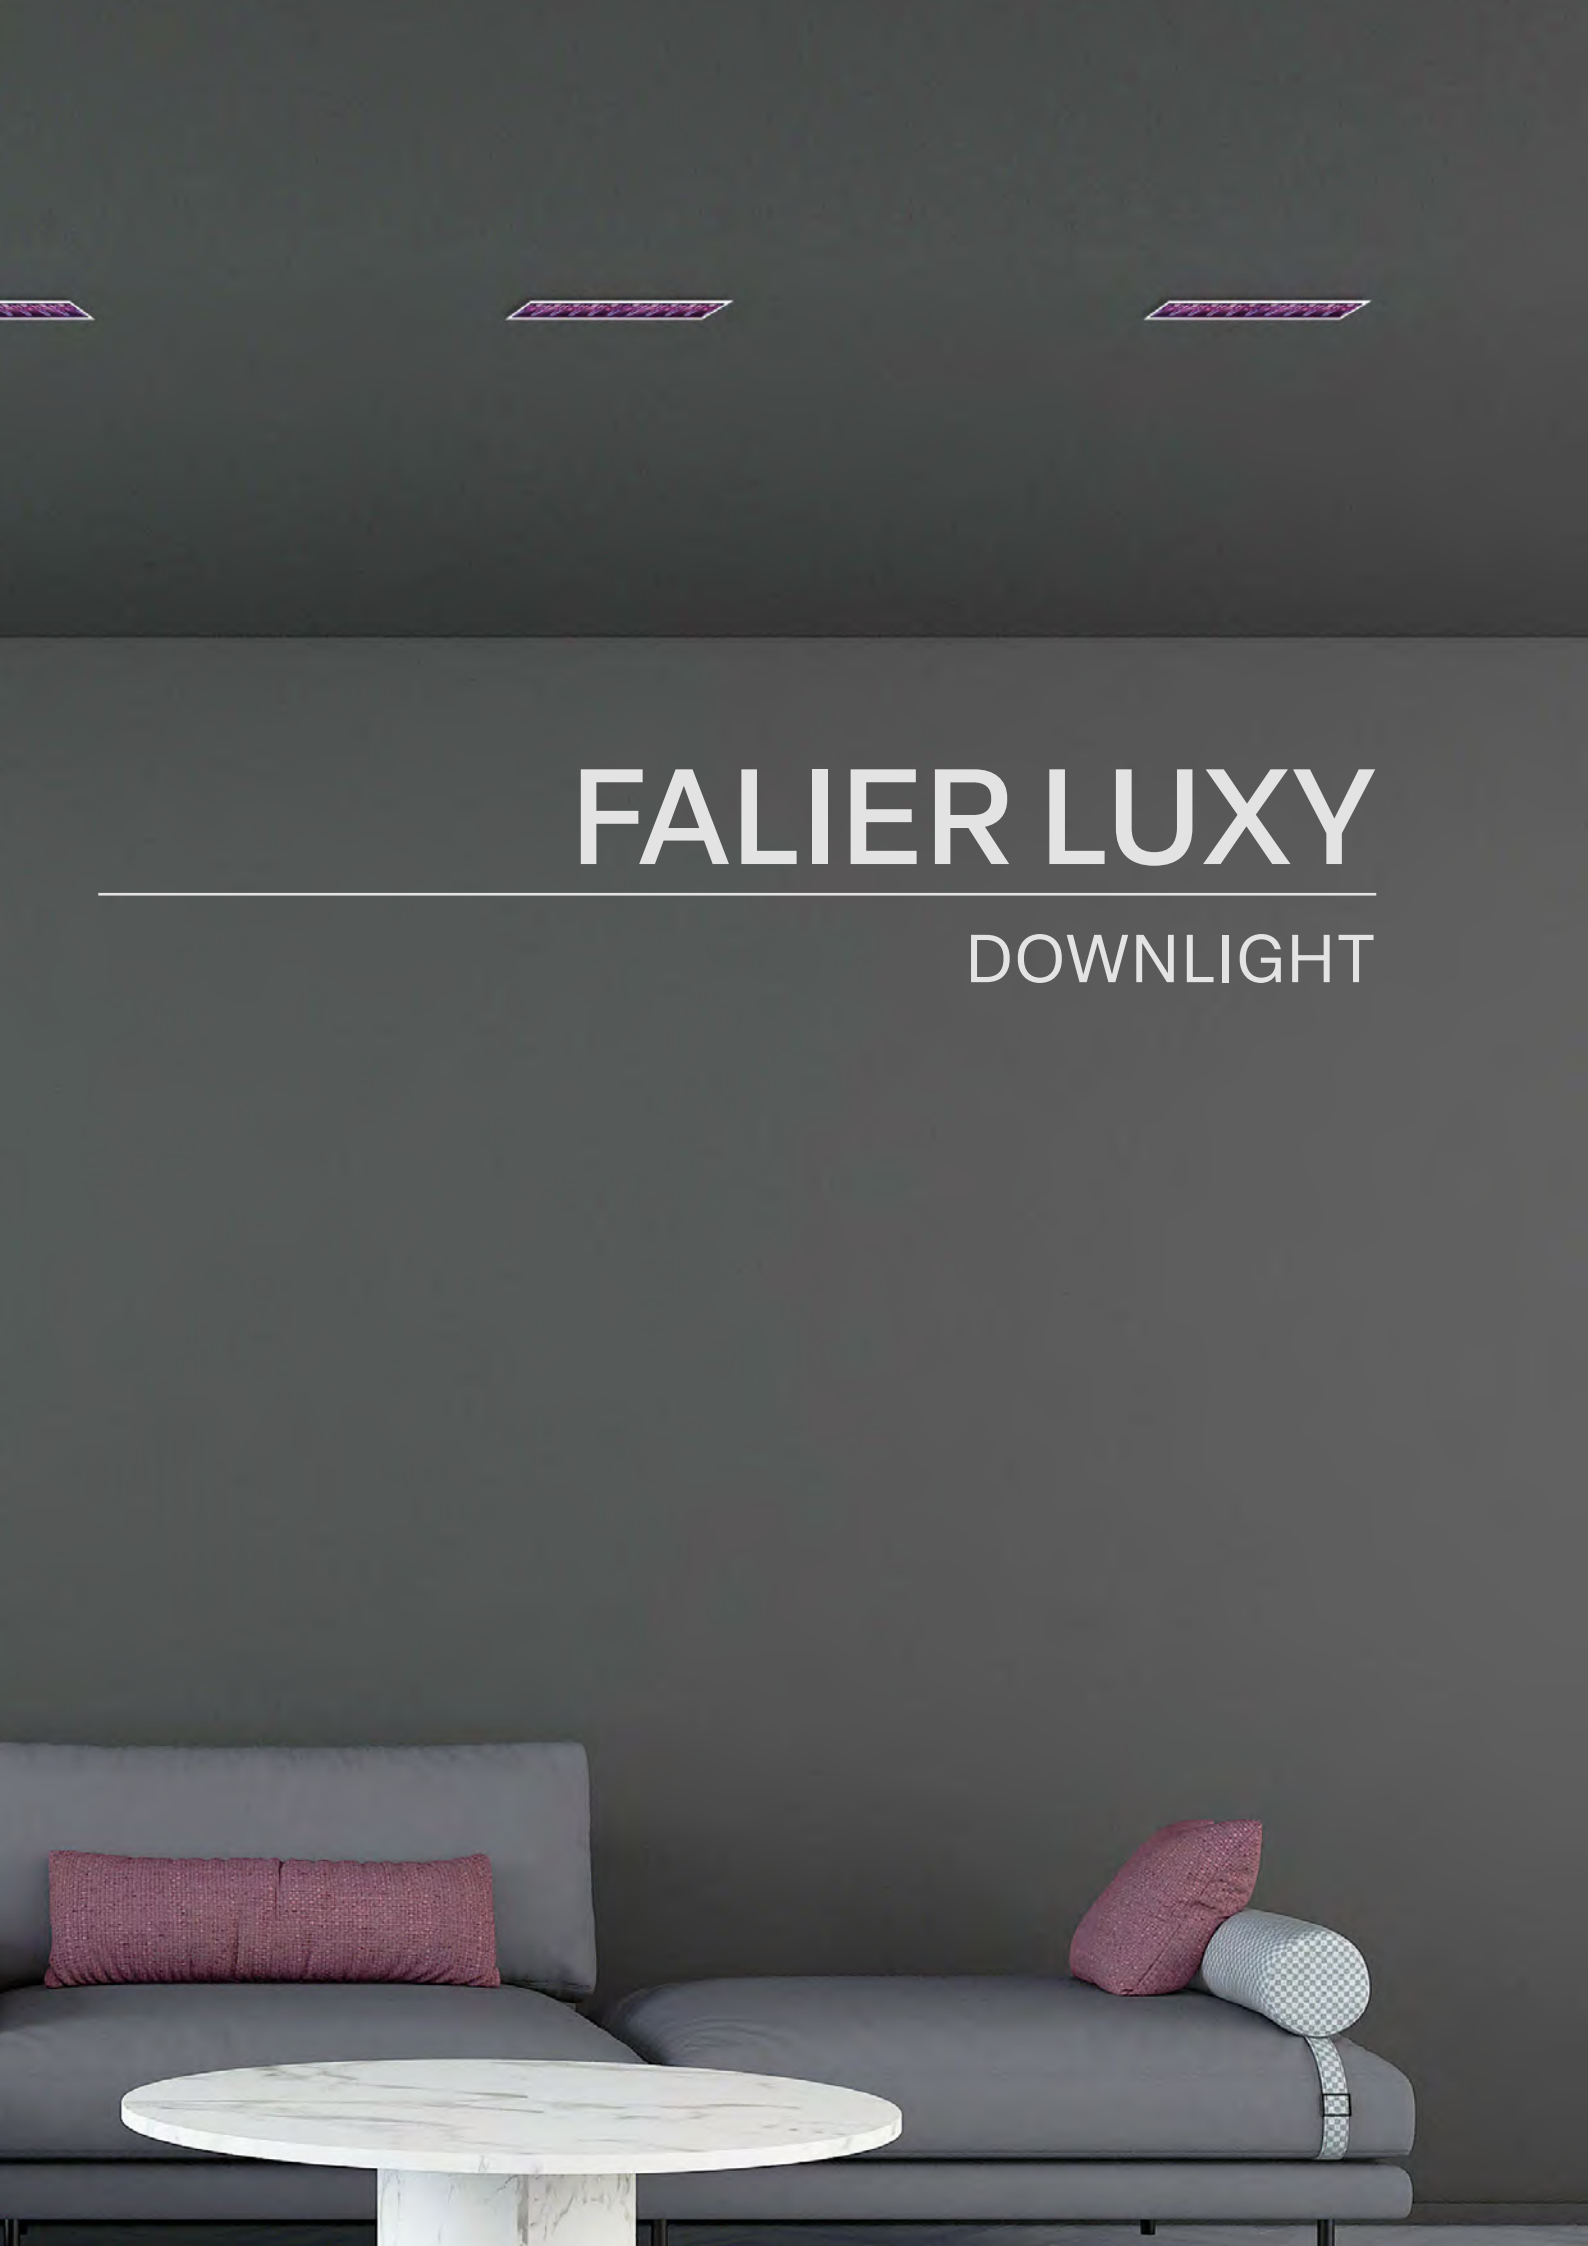

FALIER LUXY

DOWNLIGHT

FALIER LUXY

RECTANGULAR RECESSED BLADE

CRI >90 | 38° | IP20 | ALU | More colors | POWER Included



10W

Power	10 W
Input voltage	350 mA (30V)
Installation Hole	138x34 mm
Dimension	142x40x40 mm
Driver	Included

Body		Parable	Code
	3000K, 910 lm		FL105WSC
			FL105WPC
			FL105WWC
	4000K, 1000 lm		FL105WSN
			FL105WPN
			FL105WWN

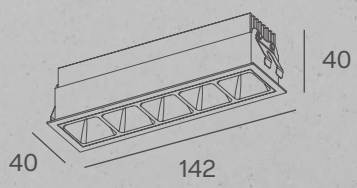

138x34 mm





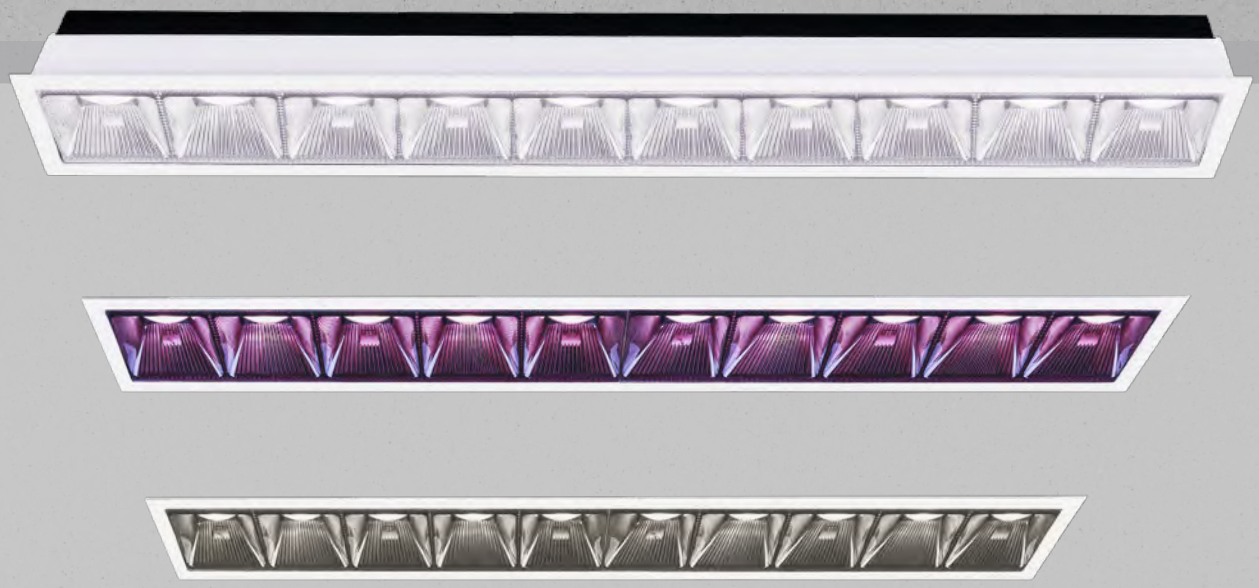

20W

Power	20 W
Input voltage	700 mA (19V)
Installation Hole	271x34 mm
Dimension	275x40x40 mm
Driver	Included

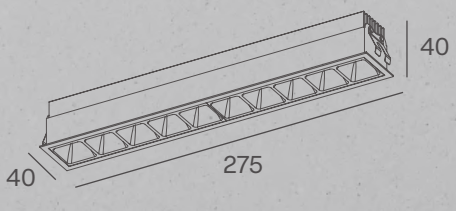

Body	Parable	Code
3000K, 1800 lm		FL110WSC
		FL110WPC
		FL110WWC
4000K, 1950 lm		FL110WSN
		FL110WPN
		FL110WWN





Dogi LED

FALIER LUXY GHOST

DOWNLIGHT

FALIER LUXY GHOST

RECTANGULAR RECESSED BLADE TRIMLESS

CRI >90 | 38° | IP20 | ALU | POWER Opzionale

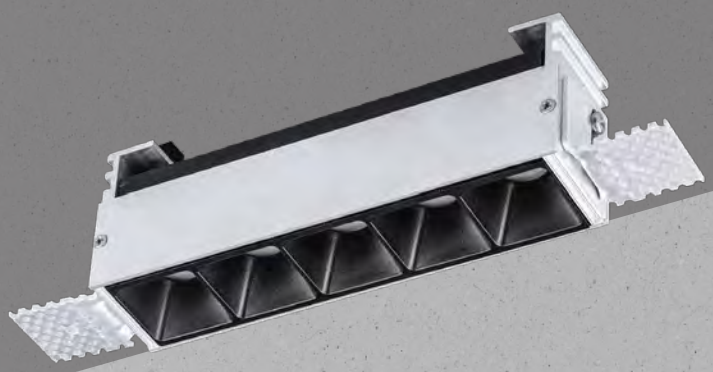

10W

Power	10 W
Input voltage	350 mA (30V)
Installation Hole	142x41 mm
Dimension	133x30x60 mm
Driver	Opzionale

Body	Parable		Code
		3000K, 910 lm	FL105BTC-38
		4000K, 1000 lm	FL105BTN-38



142x41 mm





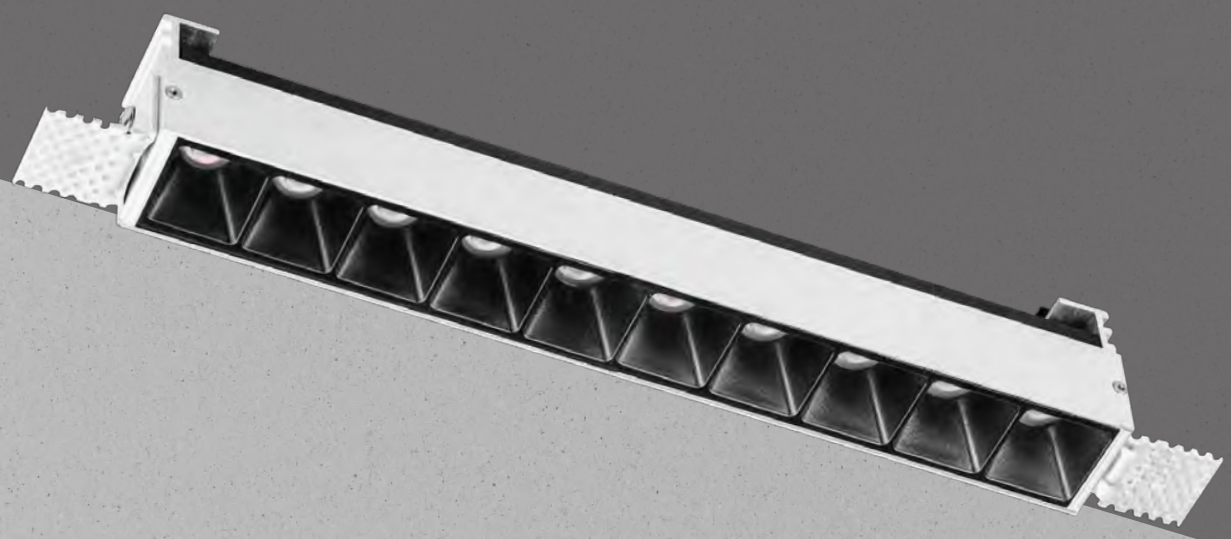

20W

Power	20 W
Input voltage	700 mA (30V)
Installation Hole	275x41 mm
Dimension	265x30x60 mm
Driver	Opzionale

Body	Parable		Code
		3000K 1620 lm	FL110BTC-38
		4000K 1800 lm	FL110BTN-38



275x41 mm





PLAFONE

LIGHTING BODIES DESIGN

FALIER LUXY PAG 76

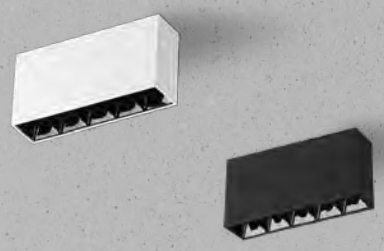

SELVO P40 PAG 82

SELVO P50 PAG 83

SELVO P123 PAG 86

SELVO Q60 PAG 89

LUPANIO LP040P PAG 92

Dogi LED

FALIER LUXY

PLAFONE

ANCIENT ART
MODERN ART

FALIER LUXY

RECTANGULAR CEILING BLADE

CRI >92 | 38° | IP20 | ALU | POWER Integrated

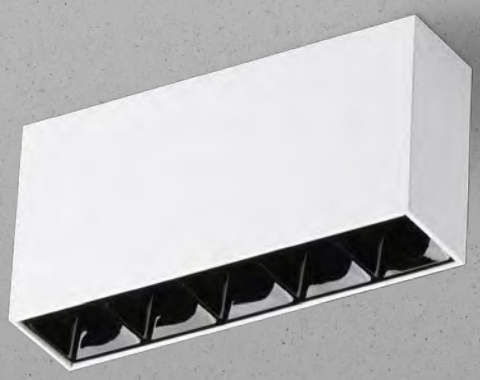

10W

Power	10 W
Input voltage	230 Vac
Dimension	137x34x68 mm
Parable color	Black



	Body	Code
3000K 790 lm	White	FL105PWC38
	Black	FL105PBC38
4000K 880 lm	White	FL105PWN38
	Black	FL105PBN38

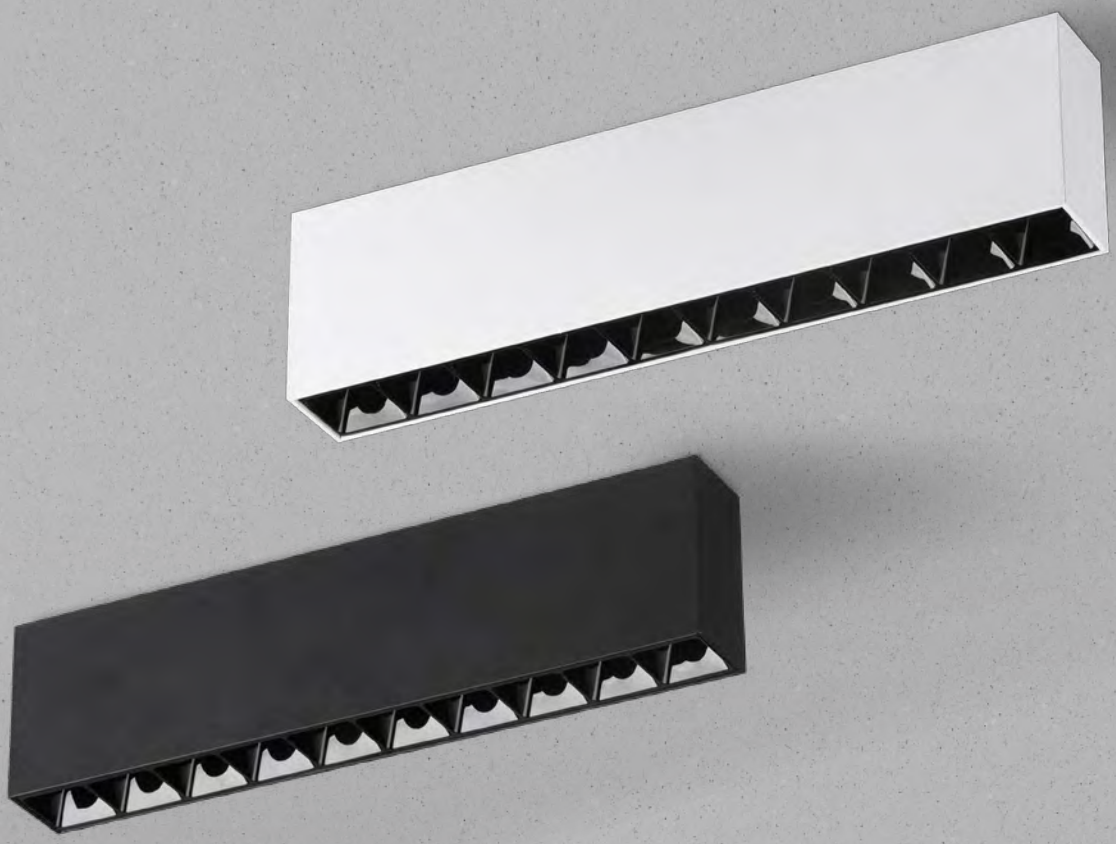

20W

Power	20 W
Input voltage	230 Vac
Dimension	269x34x68 mm
Parable color	Black

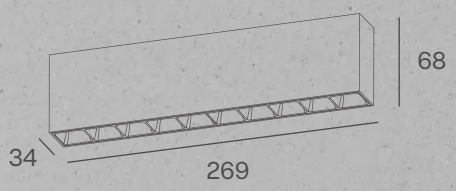

	Body	Code
3000K, 1535 lm	White	FL110PWC38
	Black	FL110PBC38
4000K, 1760 lm	White	FL110PWN38
	Black	FL110PBN38

Dogi LED

SELVO

PLAFONE

SELVO P40

CYLINDRICAL CEILING LAMP

CRI >92 | 50° | IP20 | ALU | POWER Integrated

8W



Power	8 W
Input voltage	230 Vac
Dimension	40x135 mm
Power Supply	Integrated
Material	Aluminum

	Body	Code
3000K 570 lm		SL008WC
		SL008BC
4000K 630 lm		SL008WN
		SL008BN

SELVO P50

CYLINDRICAL CEILING LAMP

CRI >92 | 50° | IP20 | ALU | POWER Integrated



10W

Ø 50

Power	10 W
Input voltage	230 Vac
Dimension	50x120 mm
Power Supply	Integrated
Material	Aluminum

Body	Code
3000K, 860 lm	SL009WC
	SL009BC
4000K, 960 lm	SL009WN
	SL009BN

Dogi LED

SELVO P123

CYLINDRICAL CEILING LAMP

CRI >92 | 50° | IP20 | ALU | POWER Integrated



130

Ø123

Ø 123

20W

Power	20 W
Input voltage	230 Vac
Dimension	123x130 mm
Power Supply	Integrated
Material	Aluminum

	Body	Code
3000K, 1650 lm	White	SL010-20WC
	Black	SL010-20BC
4000K, 1800 lm	White	SL010-20WN
	Black	SL010-20BN

30W

Power	30 W
Input voltage	230 Vac
Dimension	123x130 mm
Power Supply	Integrated
Material	Aluminum

	Body	Code
3000K, 2350 lm	White	SL010-30WC
	Black	SL010-30BC
4000K, 2600 lm	White	SL010-30WN
	Black	SL010-30BN

Dogi LED

SELVO Q60 60X60

SQUARE CEILING LIGHT

CRI >90 | 36° | IP54 | ALU | POWER Integrated



12W

Power	12 W
Input voltage	230 Vac
Dimension	60x60x120 mm
Power Supply	Integrated
Material	Aluminum

	Body	Code
3000K, 1200 lm	White	SL030-12WC
	Black	SL030-12BC
4000K, 1220 lm	White	SL030-12WN
	Black	SL030-12BN

Dogi LED

LUPANIO LP040P

MODULAR LINEAR CEILING LIGHT

LUPANIO LP040P

MODULAR LINEAR CEILING LIGHT

CRI >90 | 120° | IP20 | ALU | Custom Finishing | POWER Integrated

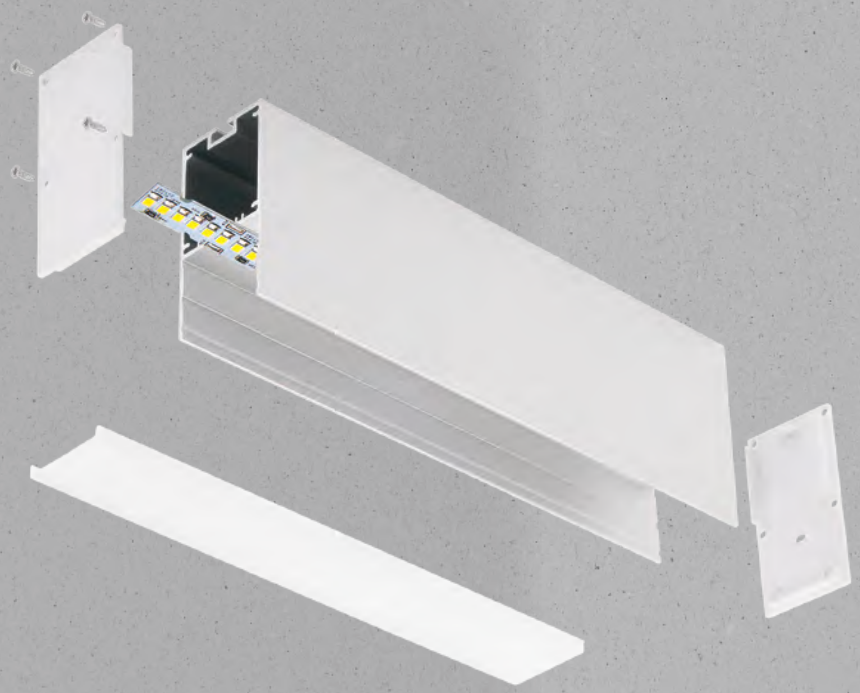



19.2 W

Custom Size
20cm → 1m

Power	19.2 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	200/1000 mm
Power Supply	Integrated
Material	Aluminum

	Body	Code
2700K / 2700 lm		LP040PW100G00
		LP040PG100G00
		LP040PB100G00
3000K / 2720 lm		LP040PW100C00
		LP040PG100C00
		LP040PB100C00
4000K / 2740 lm		LP040PW100N00
		LP040PG100N00
		LP040PB100N00

28W

Custom Size
1m → 1,5m

Power	28 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	1001/1500 mm
Power Supply	Integrated
Material	Aluminum

	Body	Code
2700K / 4050 lm		LP040PW150G00
		LP040PG150G00
		LP040PB150G00
3000K / 4070 lm		LP040PW150C00
		LP040PG150C00
		LP040PB150C00
4000K / 4090 lm		LP040PW150N00
		LP040PG150N00
		LP040PB150N00

38W

Custom Size
1,5m → 2 m

Power	38 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	1501/2000 mm
Power Supply	Integrated
Material	Aluminum

	Body	Code
2700K / 5400 lm		LP040PW200G00
		LP040PG200G00
		LP040PB200G00
3000K / 5440 lm		LP040PW200C00
		LP040PG200C00
		LP040PB200C00
4000K / 5480 lm		LP040PW200N00
		LP040PG200N00
		LP040PB200N00

LUPANIO LP040P DUO

PLAFONE

MODULAR LINEAR CEILING LIGHT

CRI >90 | 120° | IP20 | ALU | Custom Finishing | POWER Integrated

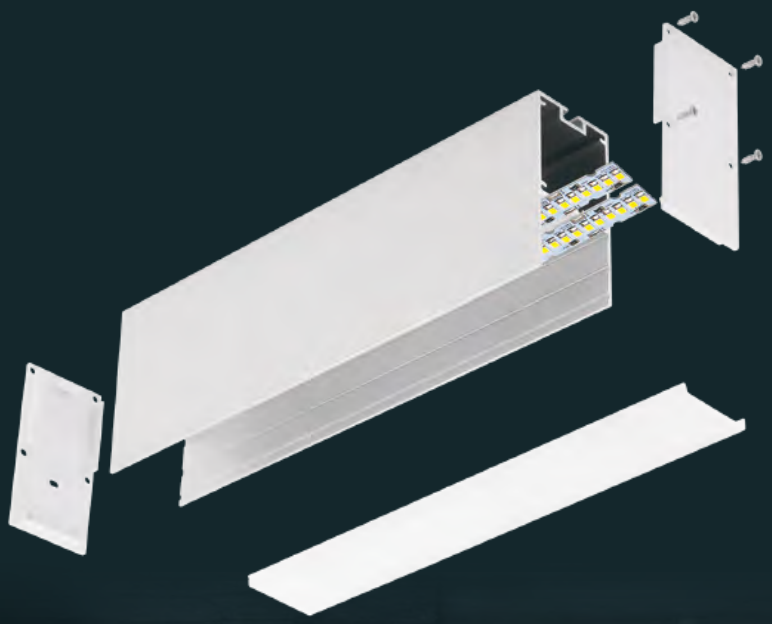



38W

Custom Size 20cm → 1m

Power	38 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	200/1000 mm
Power Supply	Integrated
Material	Aluminum

	Body	Code
2700K 5400 lm		LP040PW100G00P
		LP040PG100G00P
		LP040PB100G00P
3000K 5420 lm		LP040PW100C00P
		LP040PG100C00P
		LP040PB100C00P
4000K 5440 lm		LP040PW100N00P
		LP040PG100N00P
		LP040PB100N00P

57W

Custom Size 1m → 1,5m

Power	57 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	1001/1500 mm
Power Supply	Integrated
Material	Aluminum

	Body	Code
2700K 8100 lm		LP040PW150G00P
		LP040PG150G00P
		LP040PB150G00P
3000K 8120 lm		LP040PW150C00P
		LP040PG150C00P
		LP040PB150C00P
4000K 8140 lm		LP040PW150N00P
		LP040PG150N00P
		LP040PB150N00P

76W

Custom Size 1,5m → 2 m

Power	76 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	1501/2000 mm
Power Supply	Integrated
Material	Aluminum

	Body	Code
2700K 10800 lm		LP040PW200G00P
		LP040PG200G00P
		LP040PB200G00P
3000K 10840 lm		LP040PW200C00P
		LP040PG200C00P
		LP040PB200C00P
4000K 10880 lm		LP040PW200N00P
		LP040PG200N00P
		LP040PB200N00P

Dogi LED

APPLIQUE

DECORATIVE WALL ELEMENTS

GALBAIO 71

PAG
100

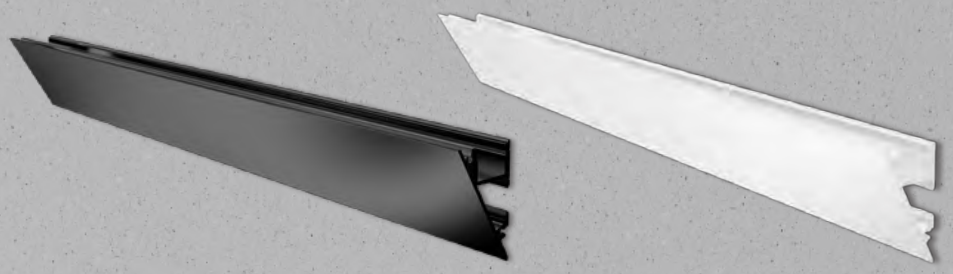

GALBAIO 34

PAG
102

GALBAIO 66

PAG
104

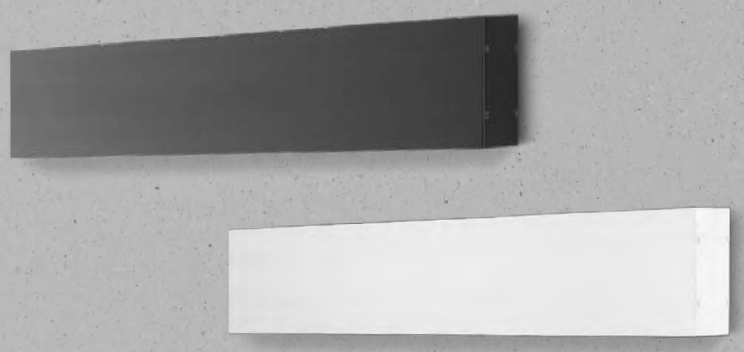

Dogi LED

GALBAIO 71

APPLIQUE

INDIRECT SINGLE EMISSION WALL LIGHT

CRI >90 | 120° | IP20 | ALU | Custom Finishing | POWER Included

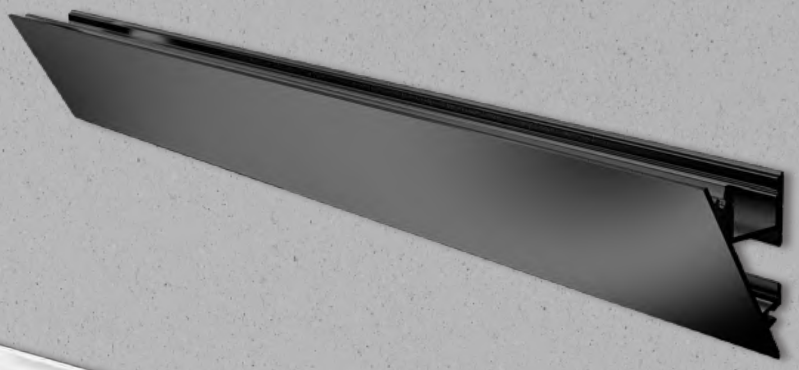



6W 33cm

Power	6 W
Input voltage	230 Vac
Dimension	37,4x23 mm
Lenght	330 mm
Power Supply	Included
Material	Aluminum

	Body	Code
2700K 890 lm		GB071W033G00
		GB071B033G00
3000K 910 lm		GB071W033C00
		GB071B033C00
4000K 930 lm		GB071W033N00
		GB071B033N00

10W 52cm

Power	10 W
Input voltage	230 Vac
Dimension	37,4x23 mm
Lenght	520 mm
Power Supply	Included
Material	Aluminum

	Body	Code
2700K 1410 lm		GB071W052G00
		GB071B052G00
3000K 1430 lm		GB071W052C00
		GB071B052C00
4000K 1450 lm		GB071W052N00
		GB071B052N00

GALBAIO 34

APPLIQUE DOUBLE EMISSION

CRI >90 | 120° | IP20 | ALU | Custom Finishing | POWER Included

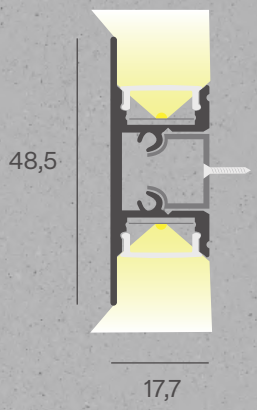

12W 33cm

Power	12 W
Input voltage	230 Vac
Dimension	48,5x17,7 mm
Lenght	330 mm
Power Supply	Included
Material	Aluminum

		Body	Code
2700K	890 lm / 890 lm		GB034W033G00
			GB034B033G00
3000K	910 lm / 910 lm		GB034W033C00
			GB034B033C00
4000K	930 lm / 930 lm		GB034W033N00
			GB034B033N00

24W 52cm

Power	24 W
Input voltage	230 Vac
Dimension	48,5x17,7 mm
Lenght	520 mm
Power Supply	Included
Material	Aluminum

		Body	Code
2700K	1400 lm / 1400 lm		GB034W052G00
			GB034B052G00
3000K	1420 lm / 1420 lm		GB034W052C00
			GB034B052C00
4000K	1440 lm / 1440 lm		GB034W052N00
			GB034B052N00

Dogi LED

GALBAIO 66

APPLIQUE

APPLIQUE DOUBLE EMISSION

CRI >90 | 120° | IP20 | ALU | Custom Finishing | POWER Integrated

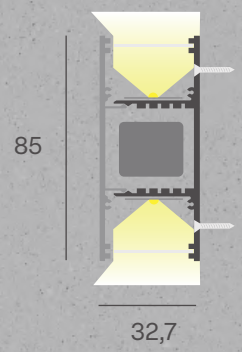

12W 33cm

Power	12 W
Input voltage	230 Vac
Dimension	85x32,7 mm
Lenght	330 mm
Power Supply	Integrated
Material	Aluminum

		Body	Code
2700K	890 lm / 890 lm		GB066W033G00
			GB066B033G00
3000K	910 lm / 910 lm		GB066W033C00
			GB066B033C00
4000K	930 lm / 930 lm		GB066W033N00
			GB066B033N00

20W 52cm

Power	20 W
Input voltage	230 Vac
Dimension	85x32,7 mm
Lenght	520 mm
Power Supply	Integrated
Material	Aluminum

		Body	Code
2700K	1400 lm / 1400 lm		GB066W052G00
			GB066B052G00
3000K	1420 lm / 1420 lm		GB066W052C00
			GB066B052C00
4000K	1440 lm / 1440 lm		GB066W052N00
			GB066B052N00

GALBAIO 66 PLUS

APPLIQUE DOUBLE EMISSION

25W 33cm

Power	25 W
Input voltage	230 Vac
Dimension	85x32,7 mm
Lenght	330 mm
Power Supply	Integrated
Material	Aluminum

		Body	Code
2700K	1780 lm / 1780 lm		GB066W033G00P
			GB066B033G00P
3000K	1800 lm / 1800 lm		GB066W033C00P
			GB066B033C00P
4000K	1820 lm / 1820 lm		GB066W033N00P
			GB066B033N00P

40W 52cm

Power	40 W
Input voltage	230 Vac
Dimension	85x32,7 mm
Lenght	520 mm
Power Supply	Integrated
Material	Aluminum

		Body	Code
2700K	2800 lm / 2800 lm		GB066W052G00P
			GB066B052G00P
3000K	2820 lm / 2820 lm		GB066W052C00P
			GB066B052C00P
4000K	2840 lm / 2840 lm		GB066W052N00P
			GB066B052N00P

GALBAIO 66 DIMMER

APPLIQUE DOUBLE EMISSION

12W 33cm

Power	12 W
Input voltage	230 Vac
Dimension	85x32,7 mm
Lenght	330 mm
Power Supply	Dimmable Integrated
Material	Aluminum

		Body	Code
2700K	890 lm / 890 lm		GB066W033G00D
			GB066B033G00D
3000K	910 lm / 910 lm		GB066W033C00D
			GB066B033C00D
4000K	930 lm / 930 lm		GB066W033N00D
			GB066B033N00D

20W 52cm

Power	20 W
Input voltage	230 Vac
Dimension	85x32,7 mm
Lenght	520 mm
Power Supply	Dimmable Integrated
Material	Aluminum

		Body	Code
2700K	1400 lm / 1400 lm		GB066W052G00D
			GB066B052G00D
3000K	1420 lm / 1420 lm		GB066W052C00D
			GB066B052C00D
4000K	1440 lm / 1440 lm		GB066W052N00D
			GB066B052N00D

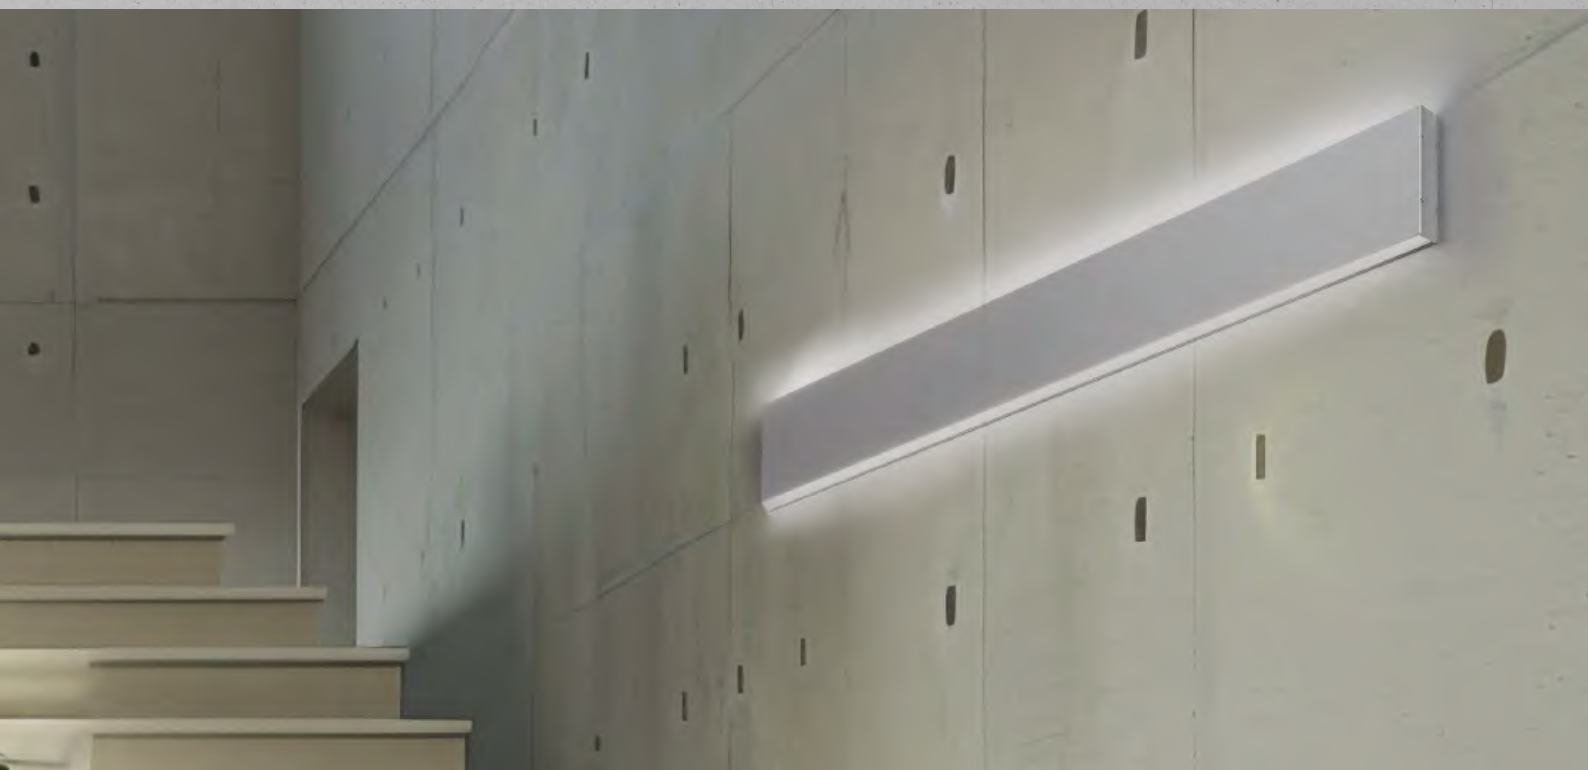

SUSPENSION

MODERNITY AND ELEGANCE

LUPANIO LP012 PAG 110

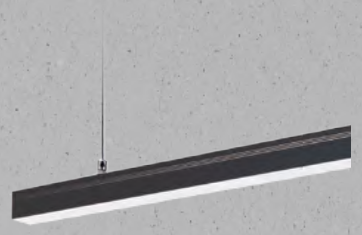

LUPANIO LP040 PAG 116

LUPANIO LP042 PAG 124

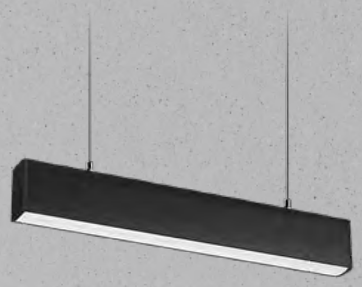

GRADENICO PAG 128

MONEGARIO PAG 132



MOGENICO PAG 140

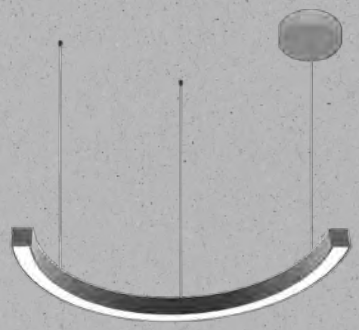

SELVO PAG 144

Dogi LED

LUPANIO LP012

SUSPENSION MONOEMISSIONE MODULAR

LUPANIO LP012

SINGLE EMISSION SUSPENSION MODULAR

CRI >90 | 120° | IP20 | ALU | Custom Finishing | POWER Included | ROSONE Included | Max Cavo 2 m

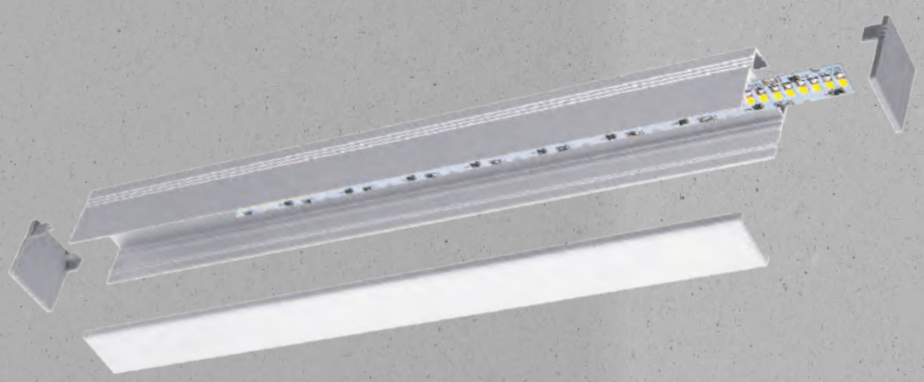



19.2 W — Custom Size: 20cm → 1m

Power	19.2 W
Input voltage	230 Vac
Dimension	22,5x25 mm
Lenght	200/1000 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

	Body	Code
2700K, 2700 lm		LP012W100G00
		LP012G100G00
		LP012B100G00
3000K, 2720 lm		LP012W100C00
		LP012G100C00
		LP012B100C00
4000K, 2740 lm		LP012W100N00
		LP012G100N00
		LP012B100N00

28W — Custom Size: 1m → 1,5m

Power	28 W
Input voltage	230 Vac
Dimension	22,5x25 mm
Lenght	1001/1500 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

	Body	Code
2700K, 4050 lm		LP012W150G00
		LP012G150G00
		LP012B150G00
3000K, 4070 lm		LP012W150C00
		LP012G150C00
		LP012B150C00
4000K, 4090 lm		LP012W150N00
		LP012G150N00
		LP012B150N00

38W — Custom Size: 1,5m → 2m

Power	38 W
Input voltage	230 Vac
Dimension	22,5x25 mm
Lenght	1501/2000 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

	Body	Code
2700K, 5400 lm		LP012W200G00
		LP012G200G00
		LP012B200G00
3000K, 5420 lm		LP012W200C00
		LP012G200C00
		LP012B200C00
4000K, 5440 lm		LP012W200N00
		LP012G200N00
		LP012B200N00

INTERNAL LINEAR JOINT



Body	Code
	SSG002C

INTERNAL “L” JOINT



Body	Code
	SSG002CP

INTERNAL “T” JOINT



Body	Code
	SSG002CT

INTERNAL CROSS JOINT



Body	Code
	SSG002CX

Dogi LED

LUPANIO LP040

SINGLE EMISSION SUSPENSION MODULAR

LUPANIO LP040

SINGLE EMISSION SUSPENSION MODULAR

CRI >90 | 120° | IP20 | ALU | Custom Finishing | POWER Integrated | Max Cavo 2 m

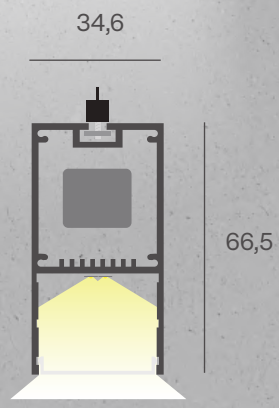

19.2 W

Custom Size
20cm → 1m

Power	19.2 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	200/1000 mm
Power Supply	Integrated
Material	Aluminum
Lenght cable max	2 m

	Body	Code
2700K – 2700 lm		LP040W100G00
		LP040G100G00
		LP040B100G00
3000K – 2720 lm		LP040W100C00
		LP040G100C00
		LP040B100C00
4000K – 2740 lm		LP040W100N00
		LP040G100N00
		LP040B100N00

28W

Custom Size
1m → 1,5m

Power	28 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	1001/1500 mm
Power Supply	Integrated
Material	Aluminum
Lenght cable max	2 m

	Body	Code
2700K – 4050 lm		LP040W150G00
		LP040G150G00
		LP040B150G00
3000K – 4070 lm		LP040W150C00
		LP040G150C00
		LP040B150C00
4000K – 4090 lm		LP040W150N00
		LP040G150N00
		LP040B150N00

38W

Custom Size
1,5m → 2m

Power	38 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	1501/2000 mm
Power Supply	Integrated
Material	Aluminum
Lenght cable max	2 m

	Body	Code
2700K – 5400 lm		LP040W200G00
		LP040G200G00
		LP040B200G00
3000K – 5420 lm		LP040W200C00
		LP040G200C00
		LP040B200C00
4000K – 5440 lm		LP040W200N00
		LP040G200N00
		LP040B200N00

Dogi LED

LUPANIO LP040 PLUS

SUSPENSION

SINGLE EMISSION SUSPENSION MODULAR

CRI >90 | 120° | IP20 | ALU | Custom Finishing | POWER Integrated | Max Cavo 2 m

38W

Custom Size
20cm → 1m

Power	38 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	200/1000 mm
Power Supply	Integrated
Material	Aluminum
Lenght cable max	2 m

	Body	Code
2700K 5400 lm		LP040W100G00P
		LP040G100G00P
		LP040B100G00P
3000K 5440 lm		LP040W100C00P
		LP040G100C00P
		LP040B100C00P
4000K 5480 lm		LP040W100N00P
		LP040G100N00P
		LP040B100N00P

57W

Custom Size
1m → 1,5m

Power	57 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	1001/1500 mm
Power Supply	Integrated
Material	Aluminum
Lenght cable max	2 m

	Body	Code
2700K 8100 lm		LP040W150G00P
		LP040G150G00P
		LP040B150G00P
3000K 8140 lm		LP040W150C00P
		LP040G150C00P
		LP040B150C00P
4000K 8180 lm		LP040W150N00P
		LP040G150N00P
		LP040B150N00P

76W

Custom Size
1,5m → 2m

Power	76 W
Input voltage	230 Vac
Dimension	34,6x66,5 mm
Lenght	1501/2000 mm
Power Supply	Integrated
Material	Aluminum
Lenght cable max	2 m

	Body	Code
2700K 10800 lm		LP040W200G00P
		LP040G200G00P
		LP040B200G00P
3000K 10840 lm		LP040W200C00P
		LP040G200C00P
		LP040B200C00P
4000K 10880 lm		LP040W200N00P
		LP040G200N00P
		LP040B200N00P

INTERNAL LINEAR JOINT



Code
SSG001C

INTERNAL “L” JOINT FOR WALL/CEILING APPLICATION



Code
SSG001CL

INTERNAL “L” JOINT



Code
SSG001CP

INTERNAL “T” JOINT



Code
SSG001CT

INTERNAL CROSS JOINT



Code
SSG001CX

CUSTOM FINISHING

WOOD EFFECT

Dogi LED

LUPANIO LP042

SUSPENSION DOUBLE EMISSION MODULAR

LUPANIO LP042

SUSPENSION

SUSPENSION DOUBLE EMISSION MODULAR

CRI >90 | 120° | IP20 | ALU | Custom Finishing | POWER Included | ROSONE Included



38W

Custom Size
20cm → 1m

Power	38 W
Input voltage	230 Vac
Dimension	17,4x31,4 mm
Lenght	200/1000 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

		Body	Code
2700K	2700 lm/m 2700 lm/m		LP042W100G00
			LP042G100G00
			LP042B100G00
3000K	2720 lm/m 2720 lm/m		LP042W100C00
			LP042G100C00
			LP042B100C00
4000K	2740 lm/m 2740 lm/m		LP042W100N00
			LP042G100N00
			LP042B100N00

57W

Custom Size
1m → 1,5m

Power	57 W
Input voltage	230 Vac
Dimension	17,4x31,4 mm
Lenght	1001/1500 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

		Body	Code
2700K	4070 lm/m 4070 lm/m		LP042W150G00
			LP042G150G00
			LP042B150G00
3000K	4090 lm/m 4090 lm/m		LP042W150C00
			LP042G150C00
			LP042B150C00
4000K	4110 lm/m 4110 lm/m		LP042W150N00
			LP042G150N00
			LP042B150N00

76W

Custom Size
1,5m → 2m

Power	76 W
Input voltage	230 Vac
Dimension	17,4x31,4 mm
Lenght	1501/2000 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

		Body	Code
2700K	5400 lm/m 5400 lm/m		LP042W200G00
			LP042G200G00
			LP042B200G00
3000K	5440 lm/m 5440 lm/m		LP042W200C00
			LP042G200C00
			LP042B200C00
4000K	5480 lm/m 5480 lm/m		LP042W200N00
			LP042G200N00
			LP042B200N00

Dogi LED

GRADENICO

SINGLE EMISSION SLIM SUSPENSION

GRADENICO

SUSPENSION

SINGLE EMISSION SLIM SUSPENSION

CRI >90 | 120° | IP20 | ALU | POWER Included | ROSONE Included | Max Cavo 2 m

21W | 1,5m

Power	21 W
Input voltage	230 Vac
Dimension	10,5x150 mm
Lenght	1500 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

	Body	Code
3000K 2600 lm	White	GR15WC
	Black	GR15BC
4000K 2620 lm	White	GR15WN
	Black	GR15BN

29W 2m

Power	29 W
Input voltage	230 Vac
Dimension	10,5x150 mm
Lenght	2000 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

	Body	Code
3000K 3460 lm		GR20WC
		GR20BC
4000K 3480 lm		GR20WN
		GR20BN

Dogi LED

MONEGARIO

CIRCLE SUSPENSION

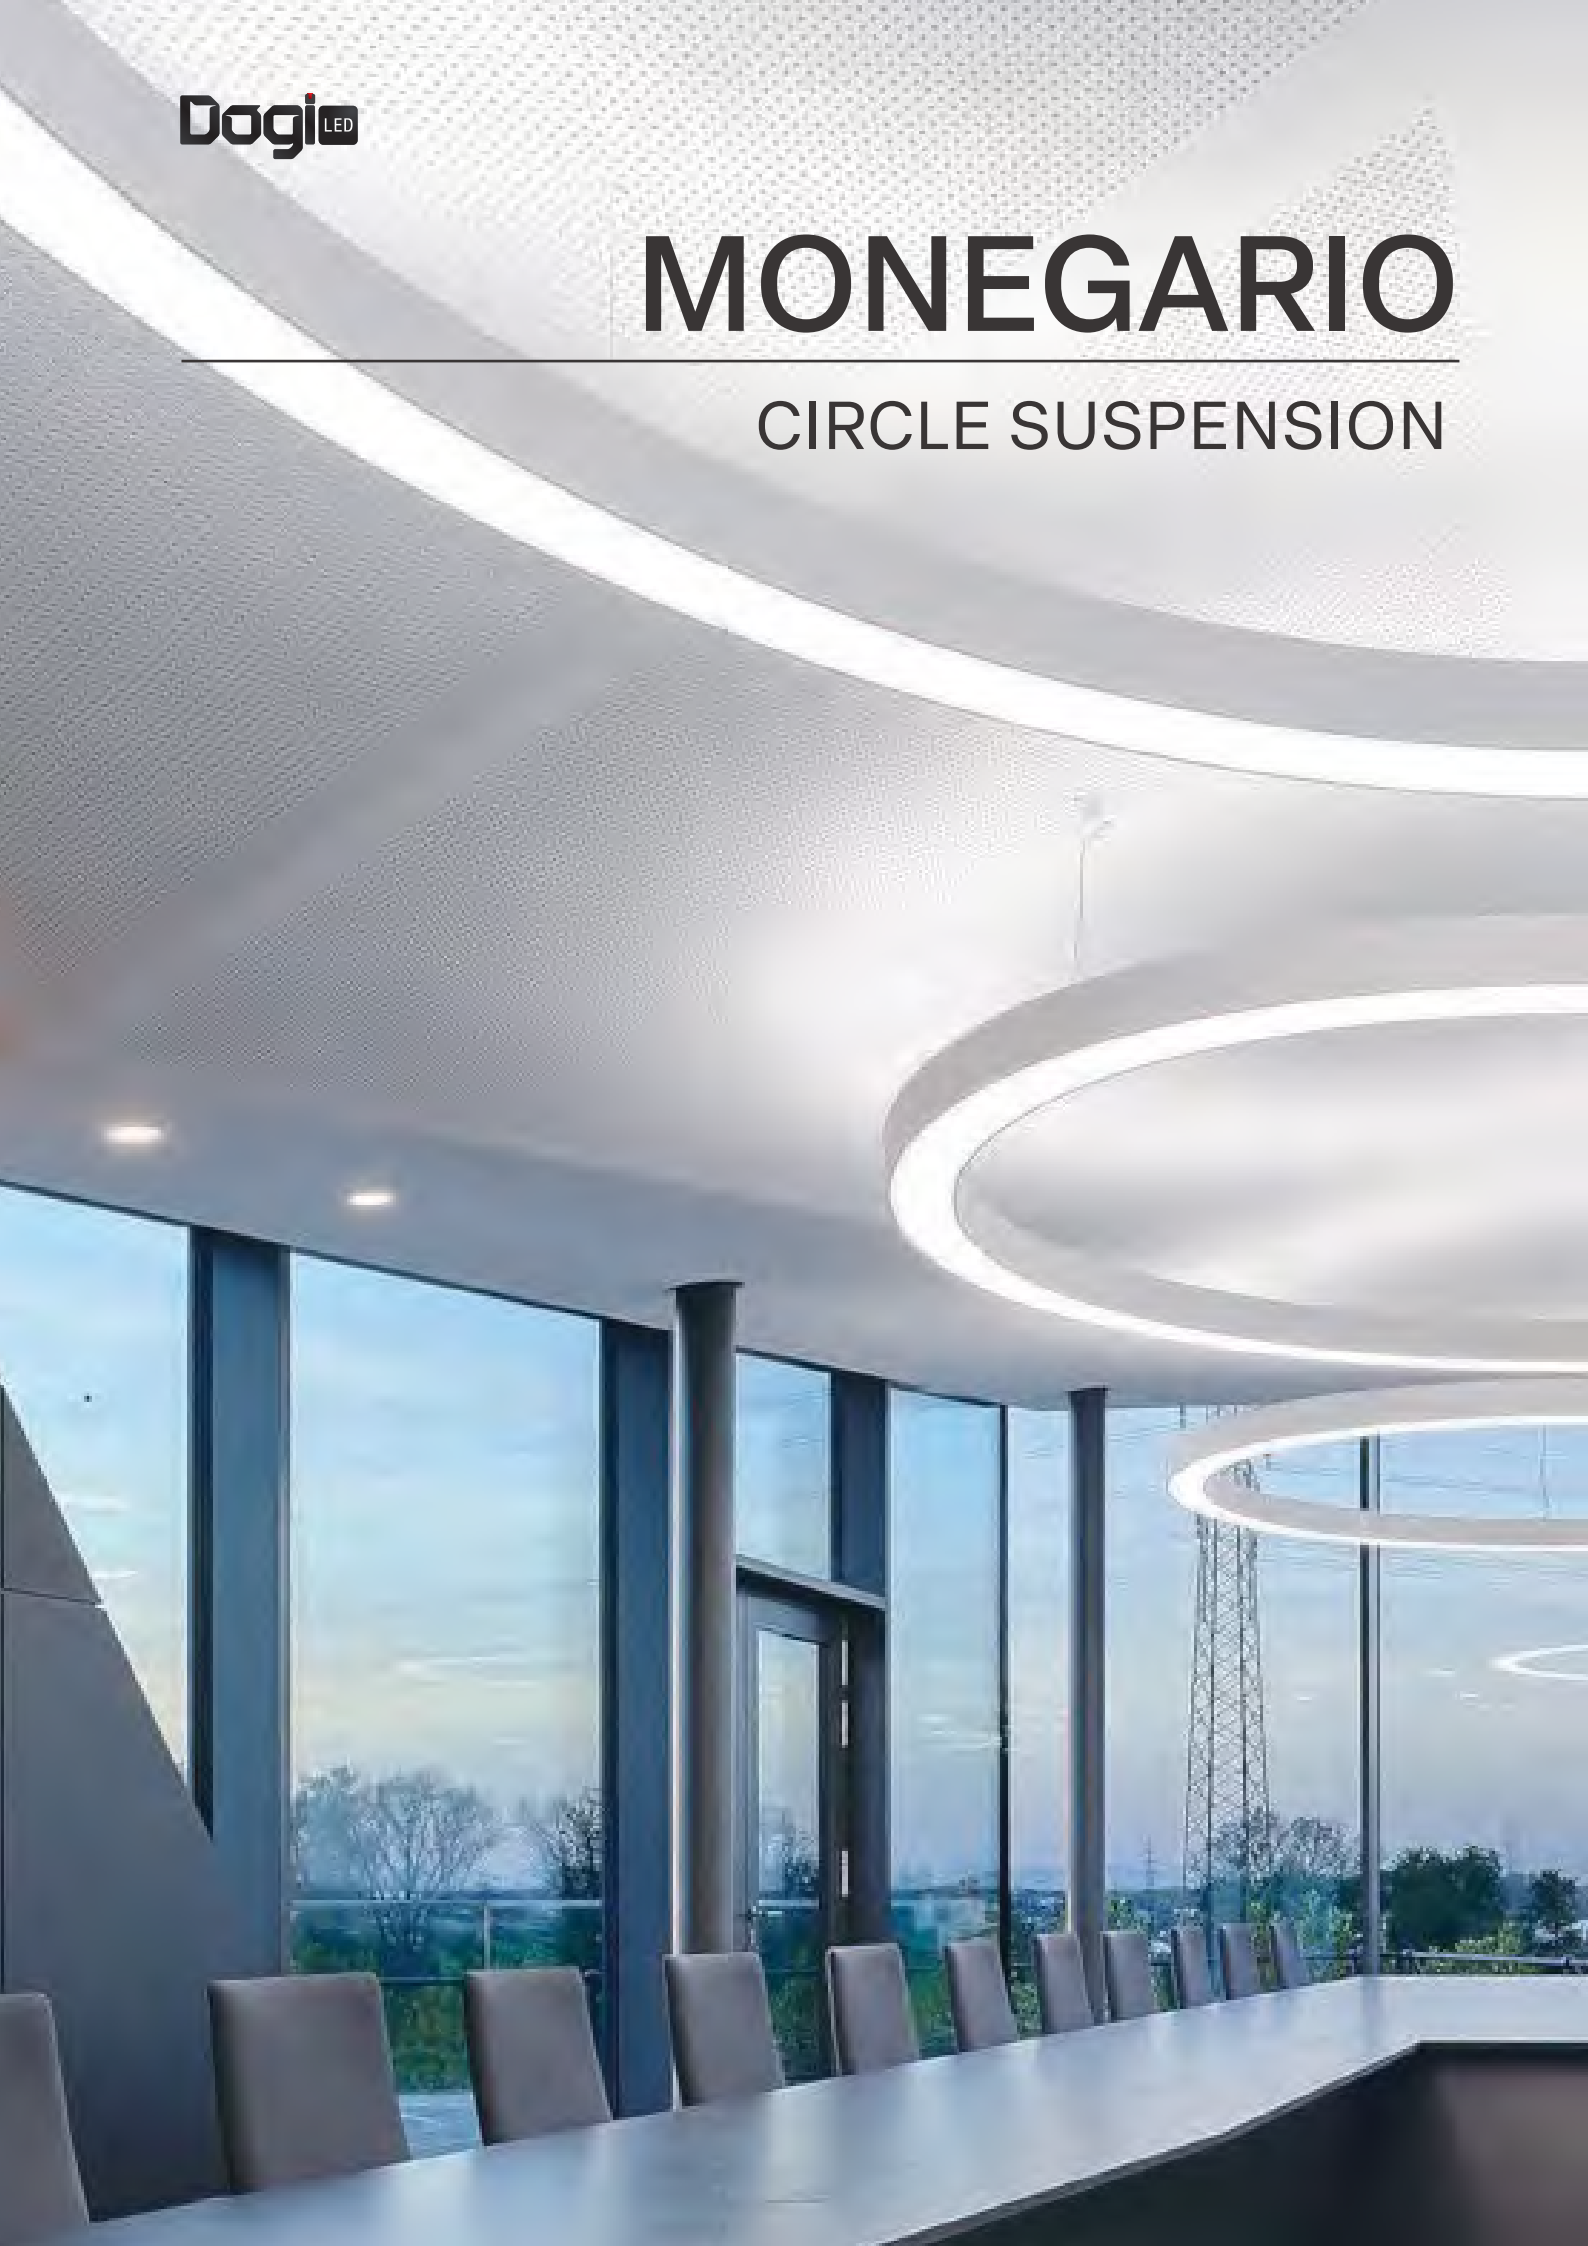

Dogi LED

MONEGARIO DUO

CIRCLE SUSPENSION DOUBLE EMISSION

CRI >90 | 120° | IP20 | ALU | POWER Included | ROSONE Included | Max Cavo 2 m

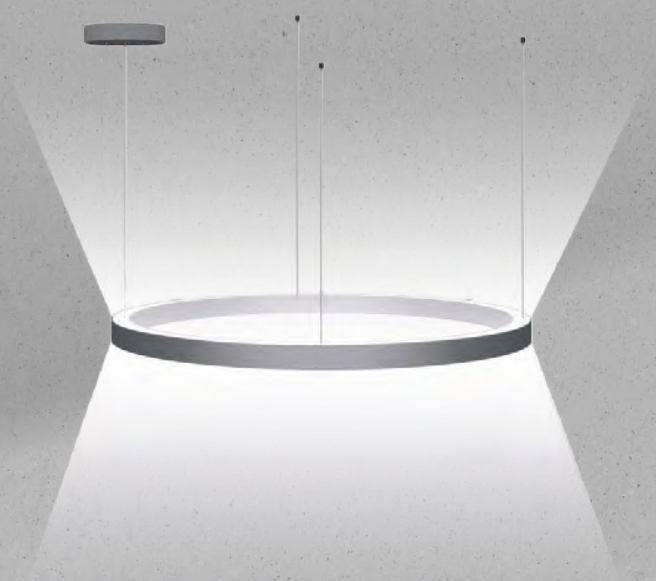

135W 100cm

Power	135 W
Input voltage	230 Vac
Dimension	45x50 mm
Diameter	1000 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

CCT		Body	Code
3000K	7500 lm / 6800 lm		MN4510WK
4000K	7530 lm / 6830 lm		MN4510BK
5700K	7560 lm / 6860 lm		



Ø100 cm



200W 150cm

Power	200 W
Input voltage	230 Vac
Dimension	45x50 mm
Diameter	1500 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

CCT		Body	Code
3000K	11200 lm / 10000 lm		MN4515WK
4000K	11230 lm / 10030 lm		MN4515BK
5700K	11260 lm / 10060 lm		

Ø150 cm



Dogi LED

SINGLE EMISSION CIRCLE SUSPENSION

CRI >90 | 120° | IP20 | ALU | POWER Included | ROSONE Included | Max Cavo 2 m

60W 100cm

Power	60 W
Input voltage	230 Vac
Dimension	25x28 mm
Diameter	1000 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

CCT	Lm	Body	Code
3000K	5500 lm		MN2510WK
4000K	6100 lm		MN2510BK
5700K	6800 lm		



Ø100 cm



80W 150cm

Power	80 W
Input voltage	230 Vac
Dimension	25x28 mm
Diameter	1500 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

CCT	Lm	Body	Code
3000K	7100 lm		MN2515WK
4000K	7900 lm		MN2515BK
5700K	8800 lm		



Ø150 cm



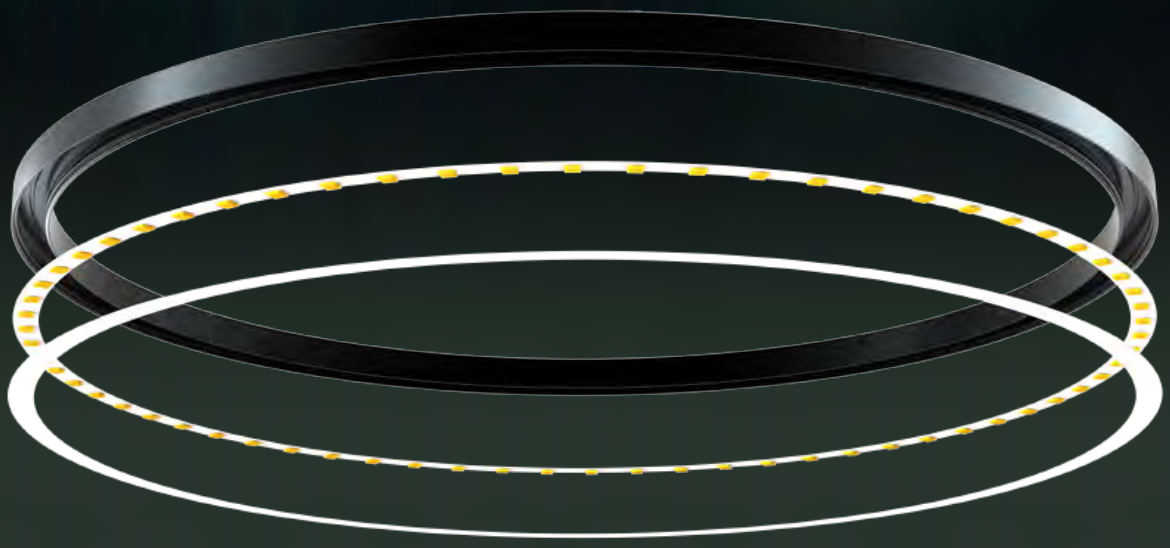

Dogi LED
ALGEBRA
ALGEBRA
architecture
PHOTOGRAPHY
INTERIOR DESIGN

MOGENICO

SEMICIRCLE SUSPENSION

Dogi LED

MOGENICO 100

SINGLE EMISSION SEMICIRCLE SUSPENSION

CRI >90 | 120° | IP20 | ALU | POWER Included | ROSONE Included | Max Cavo 2 m

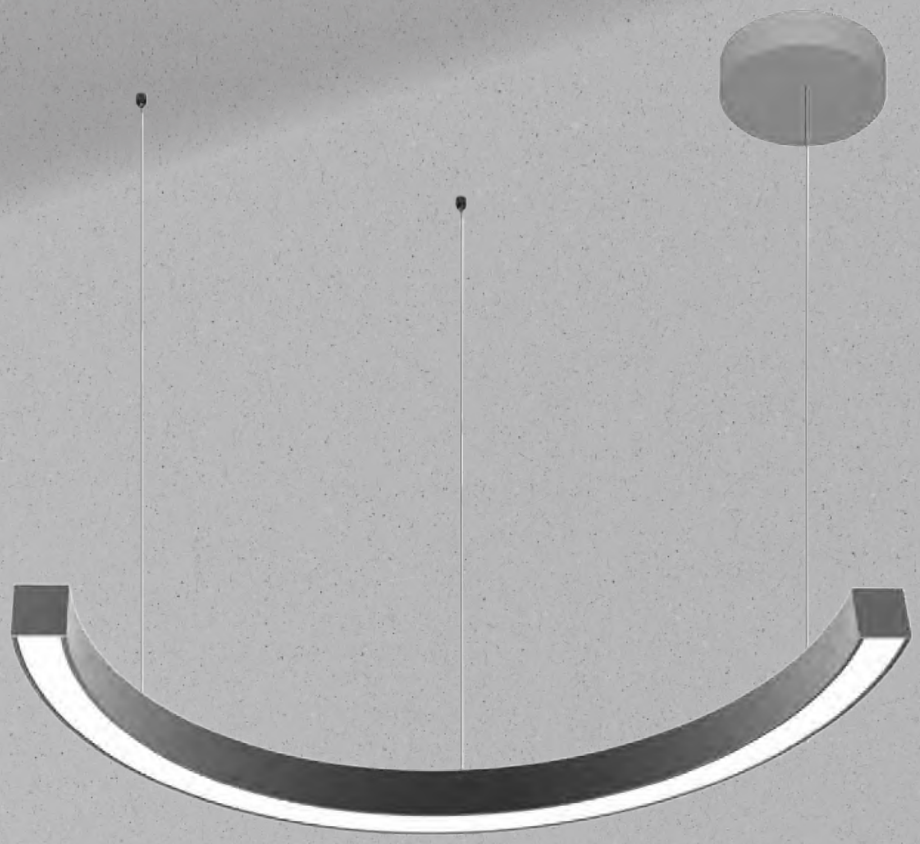

30W

Power	30 W
Input voltage	230 Vac
Dimension	25x28 mm
Diameter	1000 mm
Power Supply	Included
Material	Aluminum
Lenght cable max	2 m

CCT	Lumen	Body	Code
3000K	2750 lm		MG25H10WK
4000K	3050 lm		MG25H10BK
5700K	3400 lm		

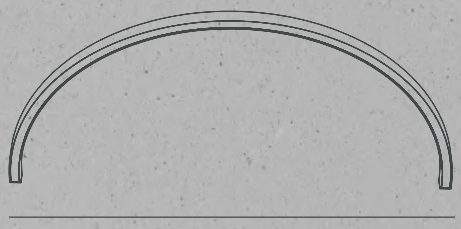

Ø100 cm



Dogi LED

SELVO

CYLINDRICAL SUSPENSION

SELVO S26

CYLINDRICAL SUSPENSION

CRI >92 | 35° | IP20 | ALU | POWER Integrated | Max Cavo 1.7 m

Ø 26

8W

Power	8 W
Input voltage	230 Vac
Dimension	Ø26x400 mm
Lenght cable max	1.7 m
Power Supply	Integrated
Material	Aluminum

	Body	Code
3000K, 660 lm		SVWC004
		SVBC004
4000K, 730 lm		SVWN004
		SVBN004

Dogi LED

SELVO S26 GLASS

CYLINDRICAL SUSPENSION

CRI >92 | IP20 | ALU | POWER Integrated | Max Cavo 1.7 m



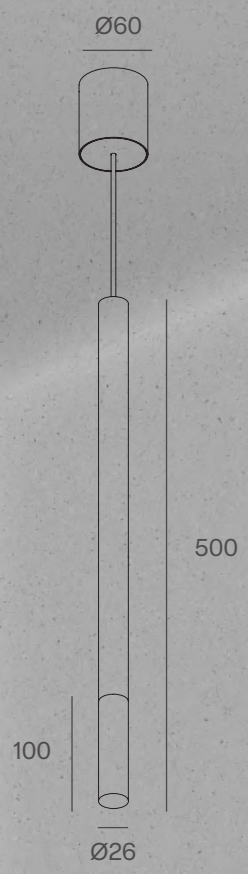

8W

Power	8 W
Input voltage	230 Vac
Dimension	Ø26x500 mm
Lenght cable max	1.7 m
Power Supply	Integrated
Material	Aluminum

	Body	Code
3000K, 660 lm	White	SVGWC004
	Black	SVGBC004
4000K, 730 lm	White	SVGWN004
	Black	SVGBN004

Dogi LED

SELVO S40

CYLINDRICAL SUSPENSION

CRI >92 | 36° | IP20 | ALU | POWER Integrated | Max Cavo 1.7 m



15W

Power	15 W
Input voltage	230 Vac
Dimension	Ø40x400 mm
Lenght cable max	1.7 m
Power Supply	Integrated
Material	Aluminum

	Body	Code
3000K, 1060 lm	White	SVWC005
	Black	SVBC005
4000K, 1180 lm	White	SVWN005
	Black	SVBN005

SELVO

GLASS DROP SUSPENSION

Dogi LED

SELVO S65

GLASS DROP SUSPENSION

CRI >92 | 60° | IP20 | Glass | POWER Integrated | Max Cavo 1.7 m

7W

Power	7 W
Input voltage	230 Vac
Dimension	Ø65x105 mm
Lenght cable max	1.7 m
Power Supply	Integrated
Material	Shiny glass

Body	Code
3000K, 1060 lm	SVC006
4000K, 1180 lm	SVN006

SELVO S65 TRIMLESS

GLASS DROP SUSPENSION

CRI >92 | 60° | IP20 | Glass | POWER Integrated | Max Cavo 1.7 m

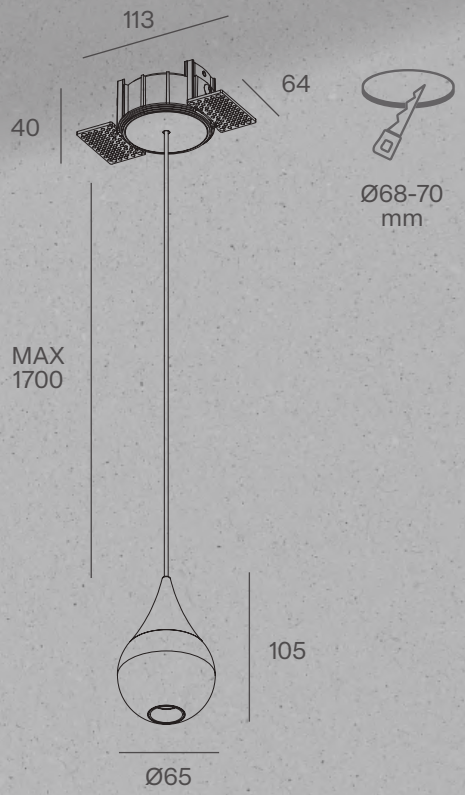

7W

Power	7 W
Input voltage	12Vdc/500mA
Dimension	Ø65x105 mm
Lenght cable max	1.7 m
Power Supply	Integrated
Material	Shiny glass

Body	Code
3000K, 1060 lm	SVC007
4000K, 1180 lm	SVN007

TRACK LIGHTS

VERSATILE AND FUNCTIONAL

CONTARINI

TRACK LIGHTS PAG 168

SPOTLIGHT PAG 162

SPOTLIGHT DALI PAG 164

MAGNETIK TM10

TRACK LIGHTS PAG 192

LEDLINE PAG 176

LEDLINE MOVE PAG 178



SPOTLINE PAG 182



SPOTLINE MOVE PAG 184

SPOT AIR PAG 186

SPOTLIGHT PAG 188

MAGNETIK TM20

TRACK LIGHTS PAG 216



LEDLINE PAG 202

SPOTLINE PAG 204

SPOTLINE MOVE PAG 208

SPOT AIR PAG 210

SPOTLIGHT ZOOM PAG 212

Dogi LED

CONTARINI

TRACK LIGHTS

SPOTLIGHT

TRACK PROJECTOR

CRI >90 | ZOOM | IP20

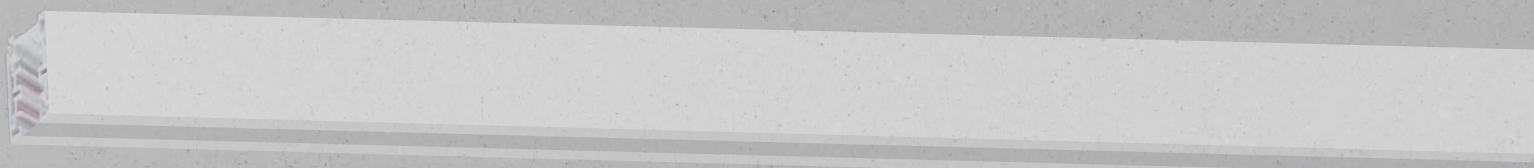

CCT

DRIVER SELECT

ZOOM

ZOOM LIGHT

10W

Power	10 W
Power Supply	180/240Vac
Light angle	10°-55°
Life	20000 h
Material	Aluminum
Material Cover	Glass
Dimensions	Ø55x140 mm

CCT		Code
3000K	600 lm	KT115WK99
4000K	700 lm	KT115BK99
6000K	800 lm	



20W

Power	20 W
Power Supply	180/240Vac
Light angle	10°-55°
Life	20000 h
Material	Aluminum
Material Cover	Glass
Dimensions	Ø65x150 mm

CCT		Code
3000K	1350 lm	KT116WK99
4000K	1550 lm	KT116BK99
6000K	1650 lm	



30W

Power	30 W
Power Supply	180/240Vac
Light angle	10°-55°
Life	20000 h
Material	Aluminum
Material Cover	Glass
Dimensions	Ø85x165 mm

CCT		Code
3000K	1900 lm	KT118WK99
4000K	2200 lm	KT118BK99
6000K	2400 lm	



SPOTLIGHT DALI

DALI TRACK PROJECTOR

CRI >90 | ZOOM | IP20 | DALI



ZOOM

ZOOM LIGHT

10W

Power	10 W
Power Supply	180/240Vac
Light angle	10°-55°
Life	20000 h
Material	Aluminum
Material Cover	Glass
Dimensions	Ø55x140 mm

CCT		Code
3000K	600 lm	KT115WK99D
4000K	700 lm	KT115BK99D
6000K	800 lm	



20W

Power	20 W
Power Supply	180/240Vac
Light angle	10°-55°
Life	20000 h
Material	Aluminum
Material Cover	Glass
Dimensions	Ø65x150 mm

CCT		Code
3000K	1350 lm	KT116WK99D
4000K	1550 lm	KT116BK99D
6000K	1650 lm	



30W

Power	30 W
Power Supply	180/240Vac
Light angle	10°-55°
Life	20000 h
Material	Aluminum
Material Cover	Glass
Dimensions	Ø85x165 mm

CCT		Code
3000K	1900 lm	KT118WK99D
4000K	2200 lm	KT118BK99D
6000K	2400 lm	



Dogi LED

DALI THREE-PHASE TRACK COMPATIBLE

2 m

Track light type	4 wires
Power Supply	230Vca
Standard Eurotrack	Yes
Installation	Surface
Material	Aluminum
Dimensions	32x35,5 mm
Lenght	2 m

Corpo	Code
	KT1102W
	KT1102B

	KT1120W
	KT1120B

3 m

Track light type	4 wires
Power Supply	230Vca
Standard Eurotrack	Yes
Installation	Surface
Material	Aluminum
Dimensions	32x35,5 mm
Lenght	3 m

Corpo	Code
	KT1103W
	KT1103B

POWER HEAD

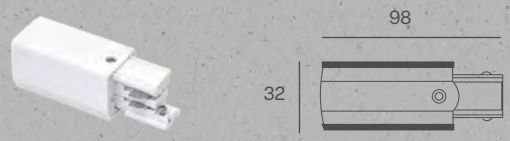

KT1105W

KT1105B

ELECTRIFIED LINEAR DISAPPEARING JOINT

KT1104W

KT1104B

REVERSIBLE 90° JOINT

KT1119W

KT1119B

LINEAR JOINT FOR CENTRAL POWER SUPPLY

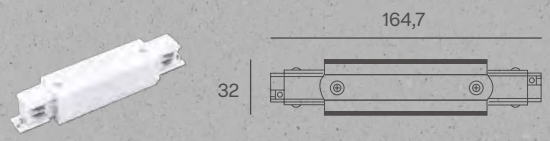

KT1118W

KT1118B

0/180° ADJUSTABLE ARTICULATED JOINT

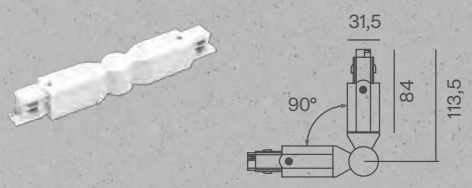

KT1115W

KT1115B

"T" JOINT

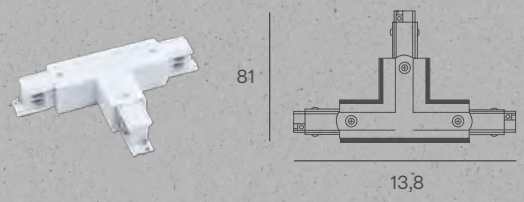

CROSS JOINT

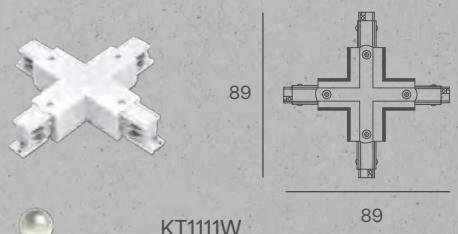

KT1111W

KT1111B

SUSPENSION MOUNTING KIT

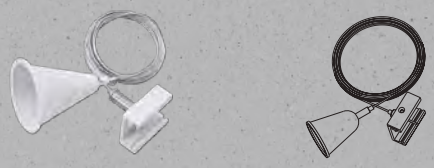

KT1114W

KT1114B

THREE-PHASE ADAPTER



KT1117W

KT1117B

DALI COMPATIBLE THREE-PHASE RECESSED TRACK

2 m

Track light type	4 wires
Power Supply	230Vca
Standard Eurotrack	Yes
Installation	Plasterb. recessed
Material	Aluminum
Dimensions	56x32,6 mm
Lenght	2 m

	Code
	KT1102WR
	KT1102BR

3 m

Track light type	4 wires
Power Supply	230Vca
Standard Eurotrack	Yes
Installation	Plasterb. recessed
Material	Aluminum
Dimensions	56x32,6 mm
Lenght	3 m

	Code
	KT1103WR
	KT1103BR

POWER HEAD



KT1105WR

KT1105BR

LINEAR JOINT FOR CENTRAL POWER SUPPLY



KT1104WR

KT1104BR

REVERSIBLE 90° JOINT



KT1119WR

KT1119BR

REVERSIBLE "T" JOINT



KT1120WR

KT1120BR

CROSS JOINT



KT1111WR

KT1111BR

Dogi LED

MAGNETIK TM10

TRACK LIGHTS

LINEAR LAMP FOR MAGNETIC TRACK

CRI >90 | 150° | IP20 | 48V

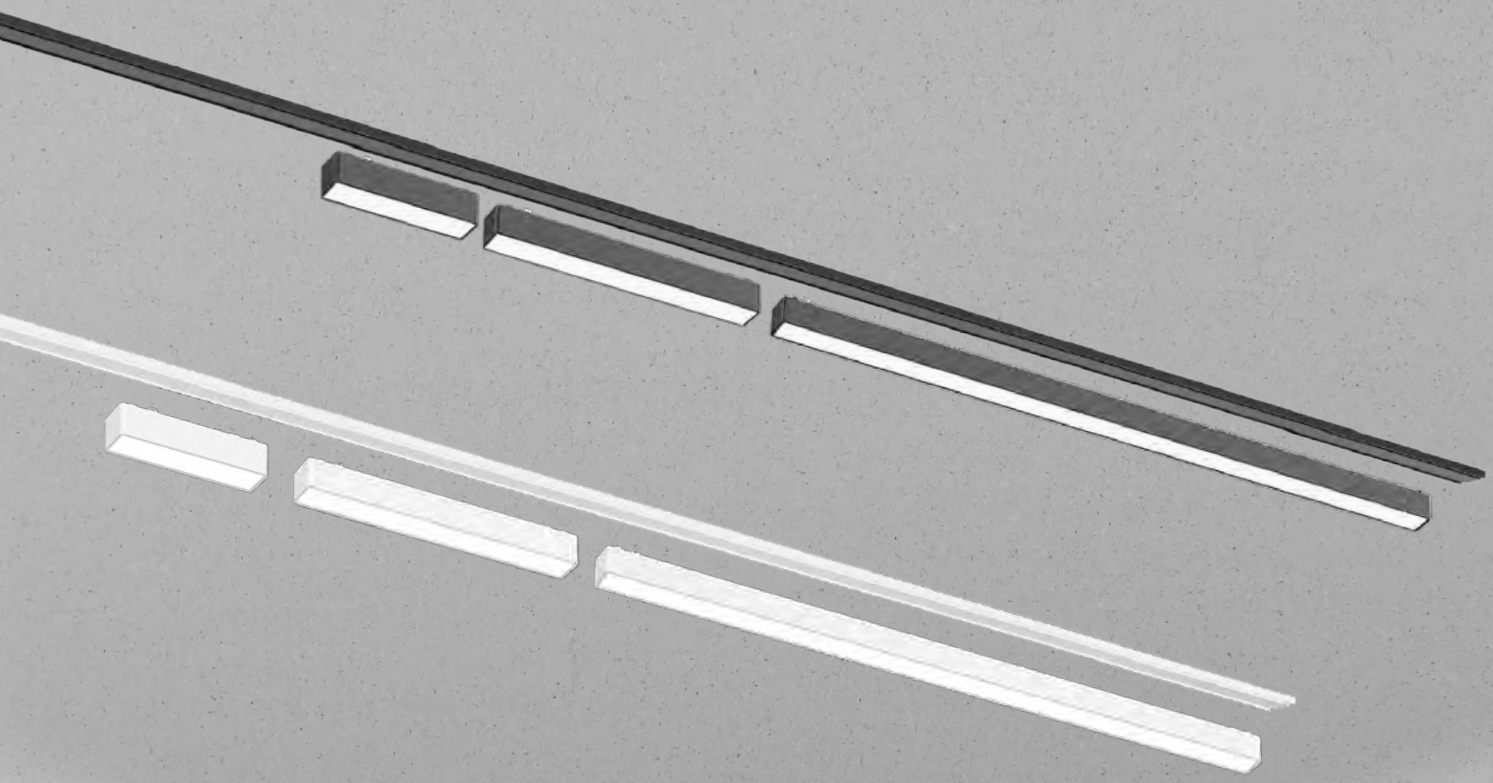

5W

Power	5 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	122x26x80 mm



		Code
	3000K, 400 lm	TM1005BC00
	4000K, 450 lm	TM1005BN00
	6000K, 500 lm	TM1005BF00
	3000K, 400 lm	TM1005WC00
	4000K, 450 lm	TM1005WN00
	6000K, 500 lm	TM1005WF00

10W

Power	10 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	230x26x80 mm

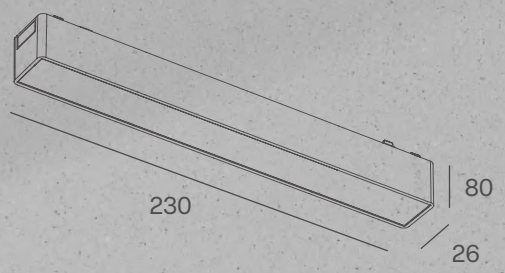

		Code
	3000K / 900 lm	TM1010BC00
	4000K / 950 lm	TM1010BN00
	6000K / 1000 lm	TM1010BF00
	3000K / 900 lm	TM1010WC00
	4000K / 950 lm	TM1010WN00
	6000K / 1000 lm	TM1010WF00

20W

Power	20 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	615x26x80 mm

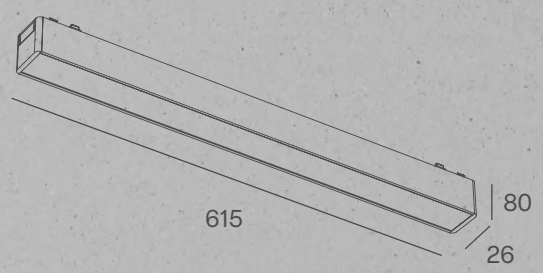

		Code
	3000K / 1900 lm	TM1020BC00
	4000K / 1950 lm	TM1020BN00
	6000K / 2000 lm	TM1020BF00
	3000K / 1900 lm	TM1020WC00
	4000K / 1950 lm	TM1020WN00
	6000K / 2000 lm	TM1020WF00

LEDLINE MOVE

LINEAR TILTING LAMP FOR MAGNETIC TRACK

CRI >90 | 150° | IP20 | 48V | MOVE

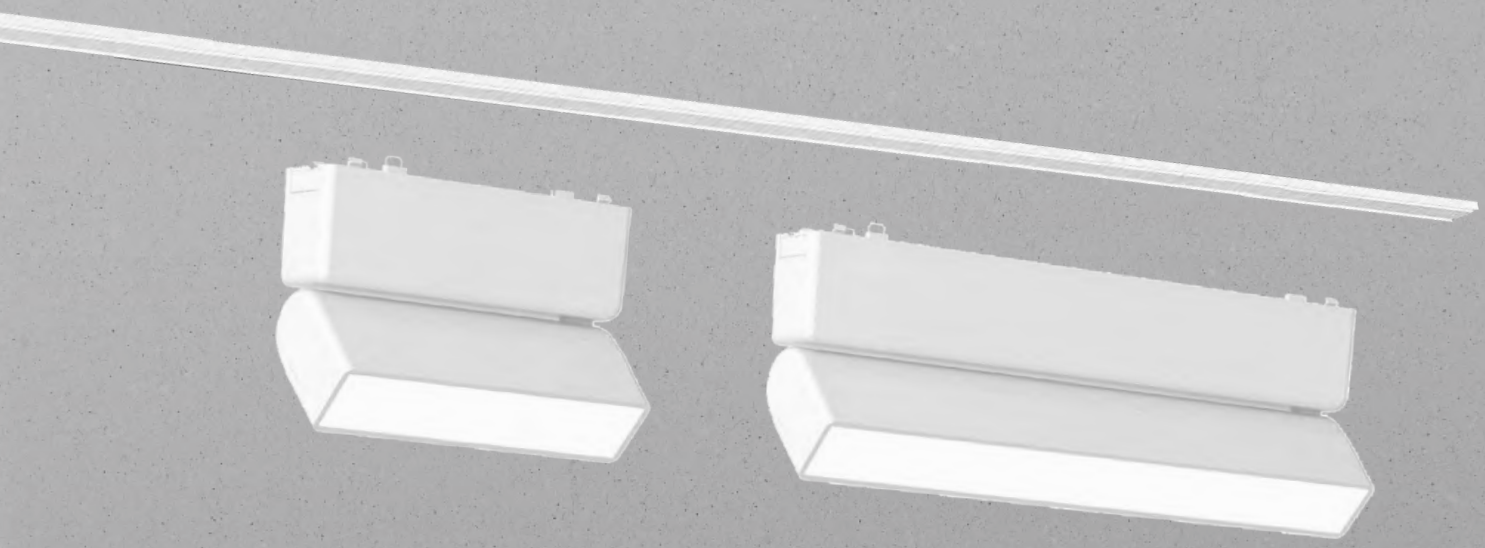

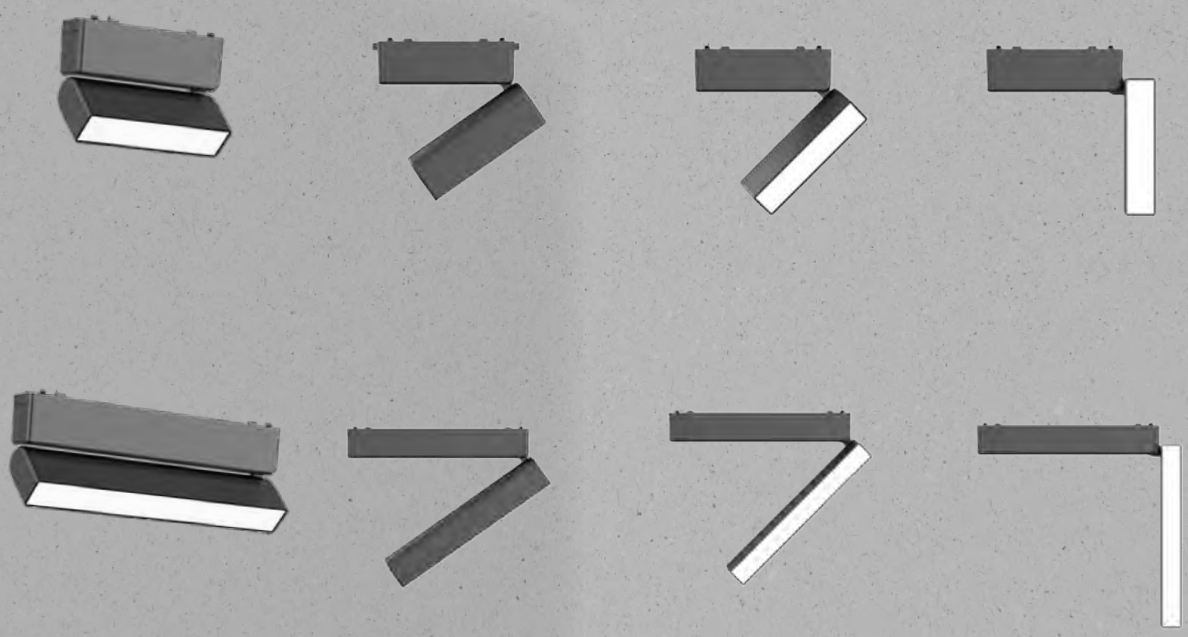

5W

Power	5 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	122x25x80 mm

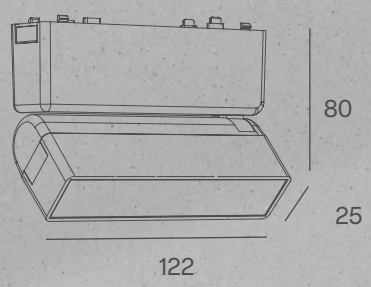

		Code
	3000K, 400 lm	TM1005BBC00
	4000K, 450 lm	TM1005BBN00

10W

Power	10 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	230x25x80 mm

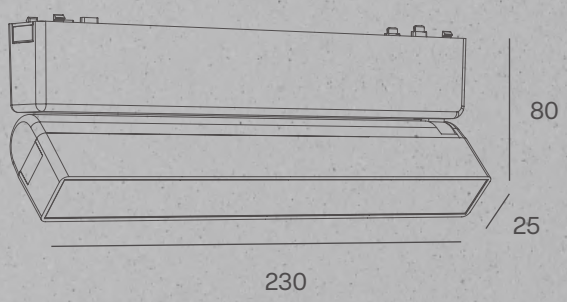

		Code
	4000K, 950 lm	TM1010BBN00
	3000K, 900 lm	TM1010WBC00

Dogi LED

LINEAR SPOTLIGHT FOR MAGNETIC TRACK

CRI >90 | 24° | IP20 | 48V

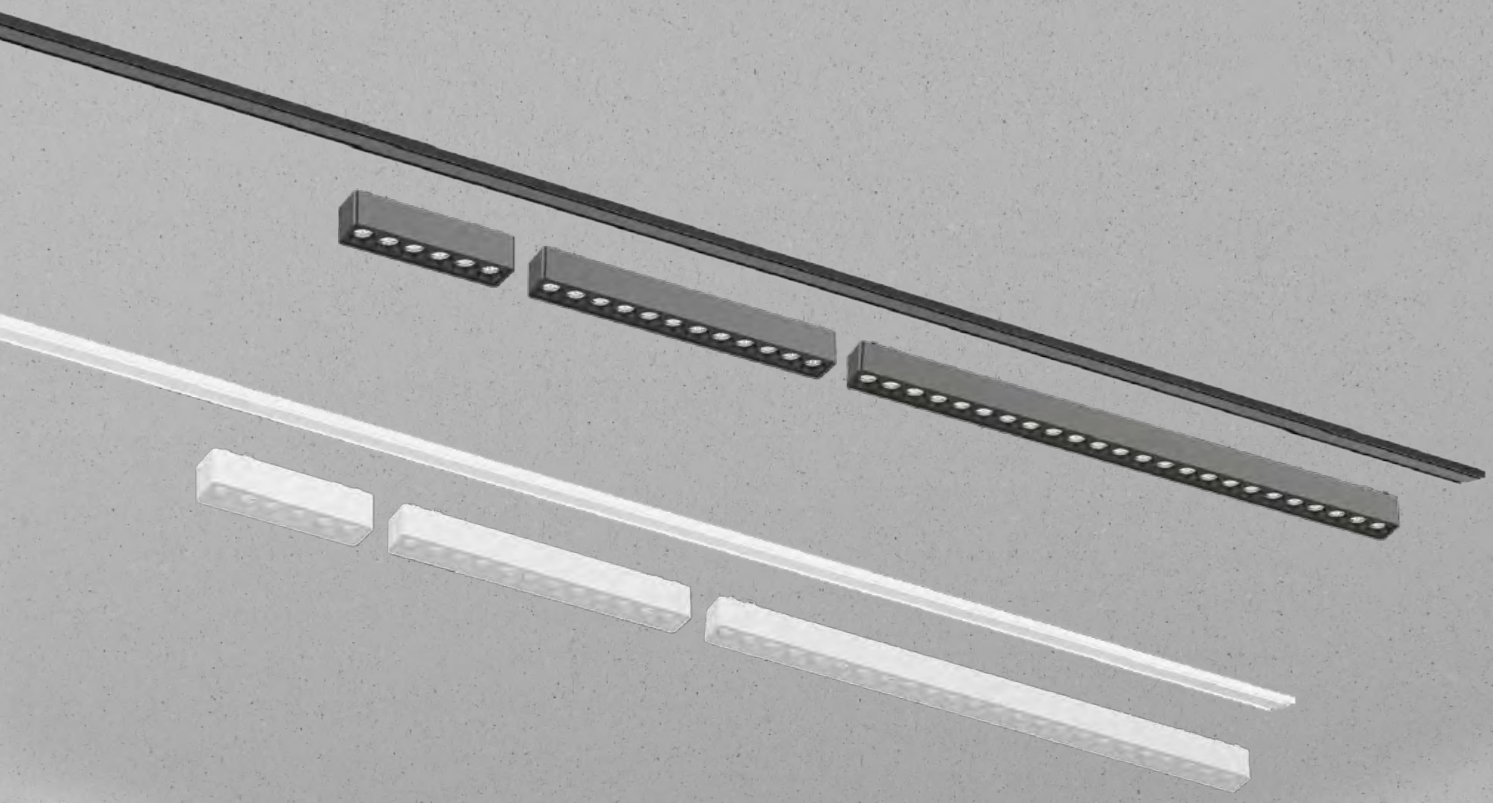

6W

Power	6 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	122x26x24 mm

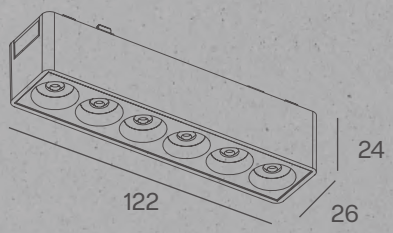

		Code
	3000K, 500 lm	TM1006BC24
	4000K, 550 lm	TM1006BN24
	6000K, 600 lm	TM1006BF24
	3000K, 500 lm	TM1006WC24
	4000K, 550 lm	TM1006WN24
	6000K, 600 lm	TM1006WF24

12W

Power	12 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	230x26x24 mm

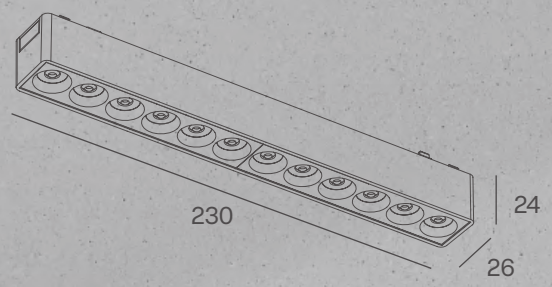

		Code
	3000K, 1100 lm	TM1012BC24
	4000K, 1150 lm	TM1012BN24
	6000K, 1200 lm	TM1012BF24
	3000K, 1100 lm	TM1012WC24
	4000K, 1150 lm	TM1012WN24
	6000K, 1200 lm	TM1012WF24

24W

Power	24 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	445x26x24 mm

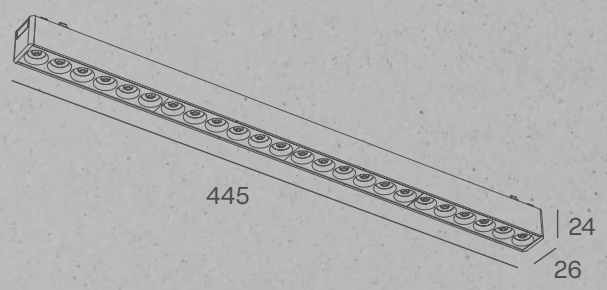

		Code
	3000K, 2300 lm	TM1024BC24
	4000K, 2350 lm	TM1024BN24
	6000K, 2400 lm	TM1024BF24
	3000K, 2300 lm	TM1024WC24
	4000K, 2350 lm	TM1024WN24
	6000K, 2400 lm	TM1024WF24

SPOTLINE MOVE

TILTING SPOTLIGHT FOR MAGNETIC TRACK

CRI >90 | 24° | IP20 | 48V | MOVE

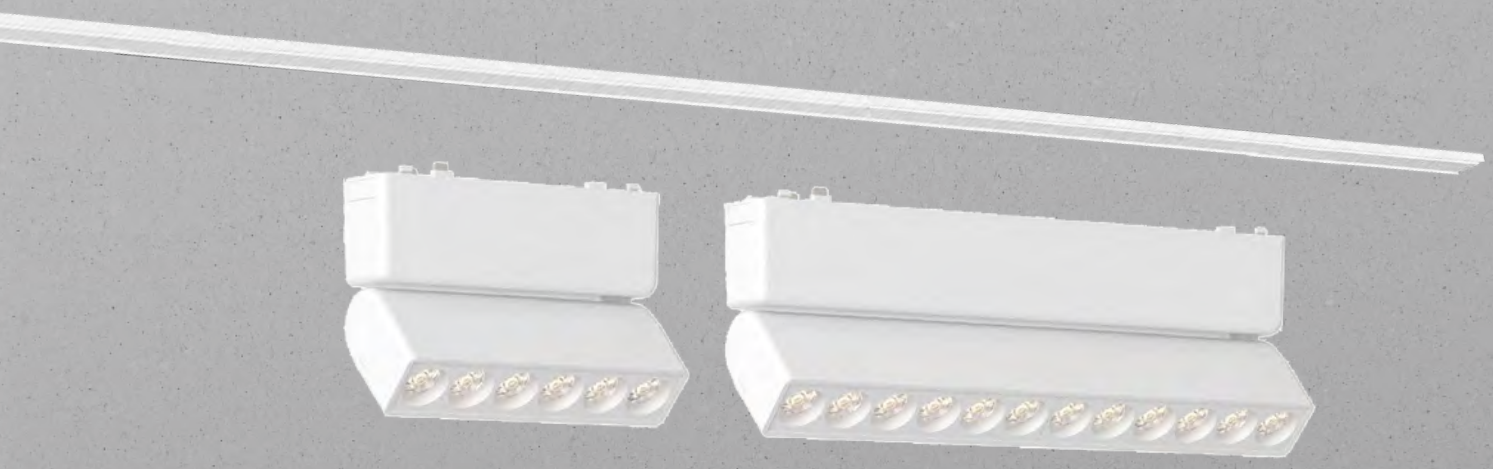

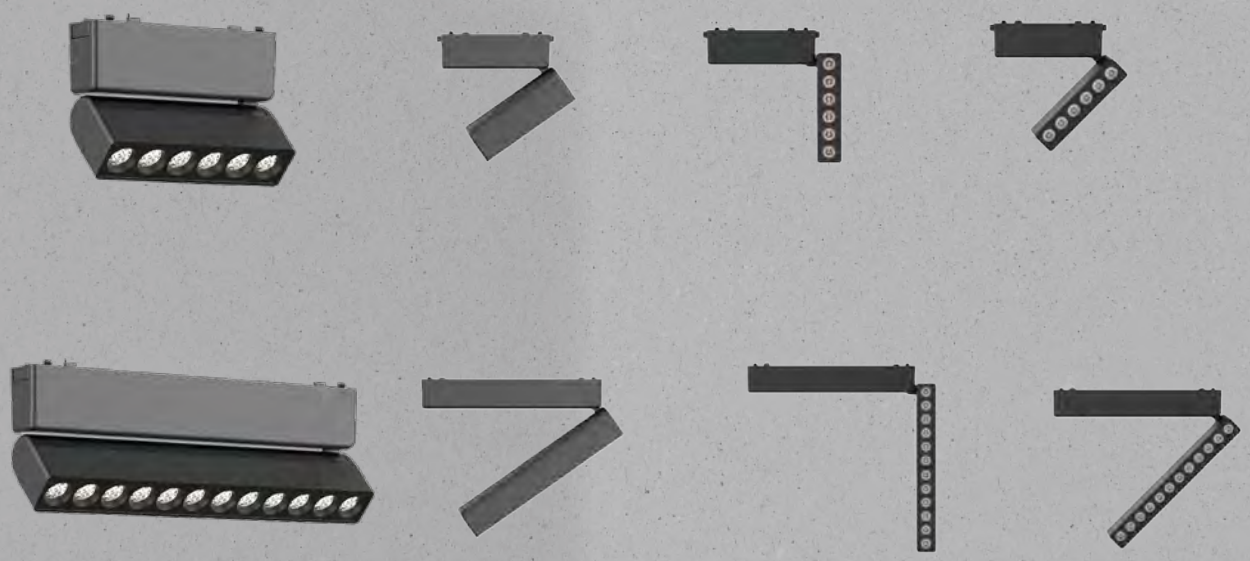

6W

Power	6 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	122x26x80 mm

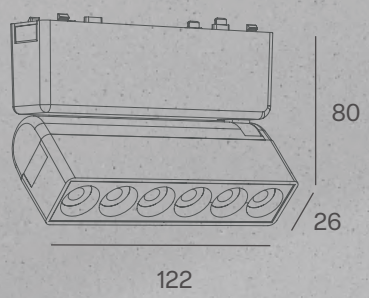

		Code
	3000K, 500 lm	TM1006BBC24
	4000K, 550 lm	TM1006BBN24
	6000K, 600 lm	TM1006BBF24
	3000K, 500 lm	TM1006WBC24
	4000K, 550 lm	TM1006WBN24
	6000K, 600 lm	TM1006WBF24

12W

Power	12 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	230x26x80 mm

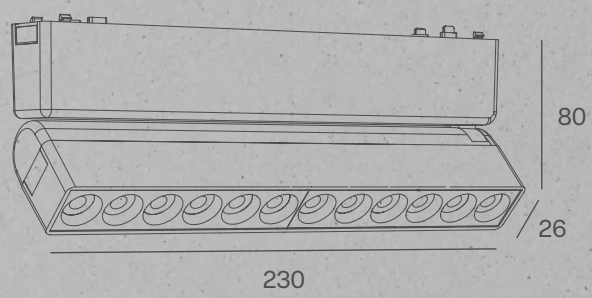

		Code
	3000K, 1100 lm	TM1012BBC24
	4000K, 1150 lm	TM1012BBN24
	6000K, 1200 lm	TM1012BBF24
	3000K, 1100 lm	TM1012WBC24
	4000K, 1150 lm	TM1012WBN24
	6000K, 1200 lm	TM1012WBF24

SPOT AIR

MAGNETIC TRACK SUSPENSION

CRI >90 | 24° | IP20 | 48V

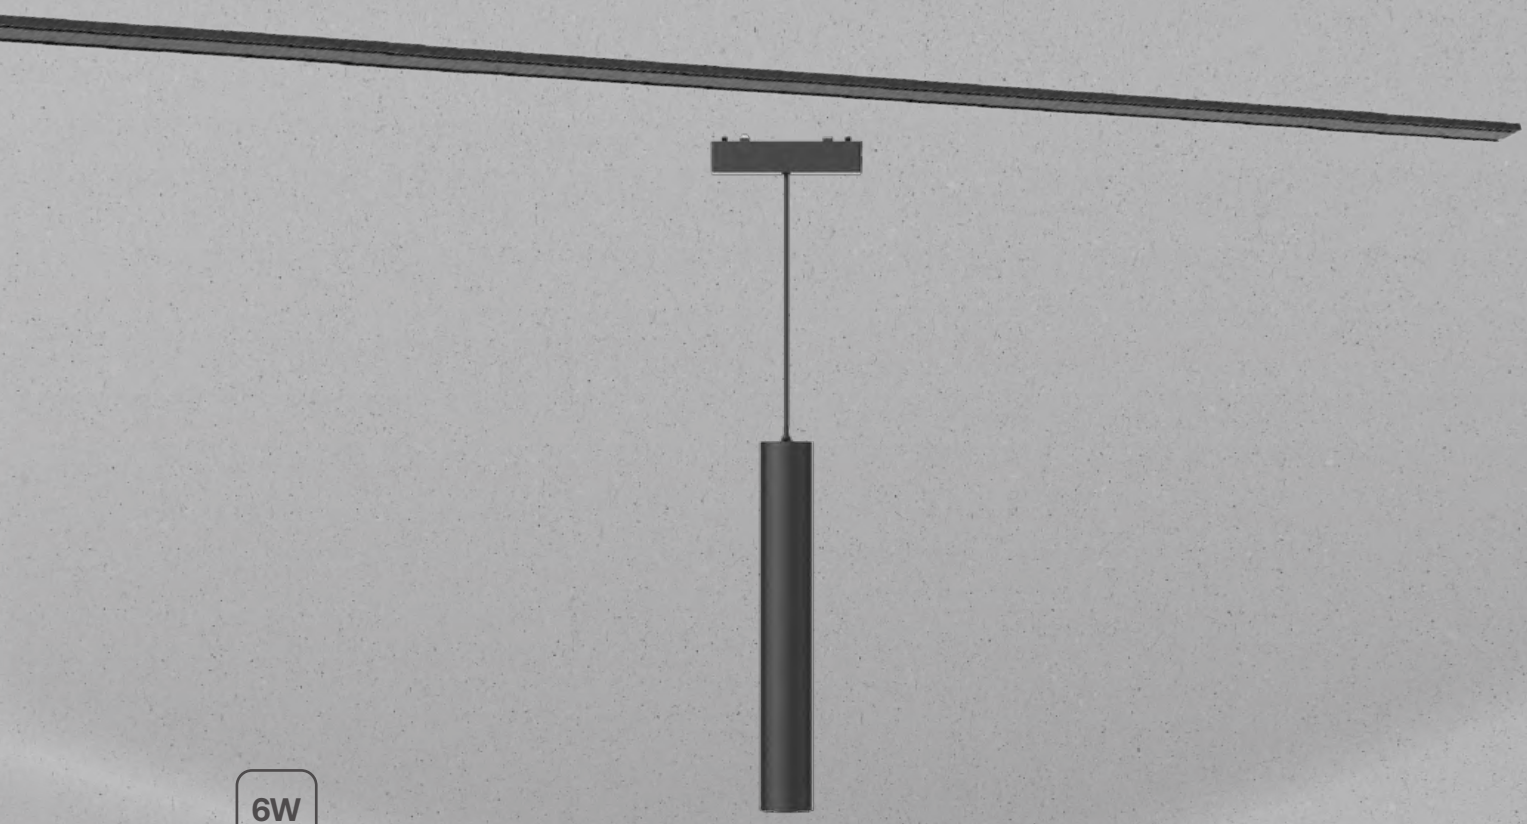

6W

Power	6 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	Ø30x300 mm

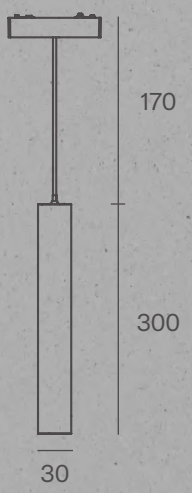

		Code
	3000K, 500 lm	TM1006SBC24
	4000K, 550 lm	TM1006SBN24
	6000K, 600 lm	TM1006SBF24
	3000K, 500 lm	TM1006SWC24
	4000K, 550 lm	TM1006SWN24
	6000K, 600 lm	TM1006SWF24

MAGNETIC TRACK SPOTLIGHT

CRI >90 | 24° | IP20 | 48V

9W

Power	9 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	Ø44x160 mm

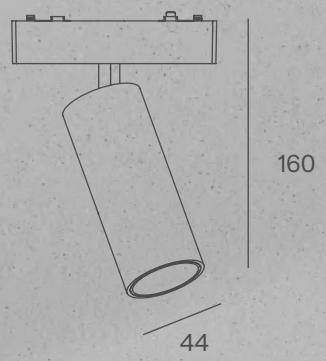

		Code
	3000K, 800 lm	TM1009PBC24
	4000K, 850 lm	TM1009PBN24
	6000K, 900 lm	TM1009PBF24
	3000K, 800 lm	TM1009PWC24
	4000K, 850 lm	TM1009PWN24
	6000K, 900 lm	TM1009PWF24

18W

Power	18 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM10
Material Base	Aluminum
Material Cover	Plastic
Dimensions	Ø55x185 mm

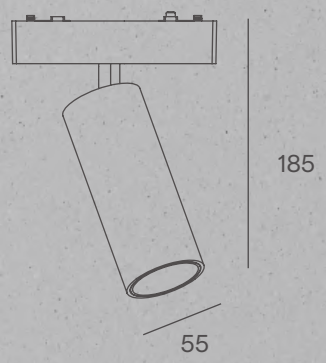

		Code
	3000K, 1700 lm	TM1018PBC24
	4000K, 1750 lm	TM1018PBN24
	6000K, 1800 lm	TM1018PBF24
	3000K, 1700 lm	TM1018PWC24
	4000K, 1750 lm	TM1018PWN24
	6000K, 1800 lm	TM1018PWF24

Dogi LED

ULTRA SLIM MAGNETIC TRACK 48V

SURFACE

Track light type	Ultra Slim Magnetic 48V
Power Supply	48Vdc
Standard Eurotrack	No
Installation	Surface
Material	Aluminum
Dimensions	26x6 mm
Lenght	2 m

	Code
	TM1002BS
	TM1002WS

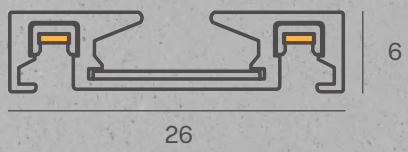

ULTRA SLIM RECESSED MAGNETIC TRACK 48V

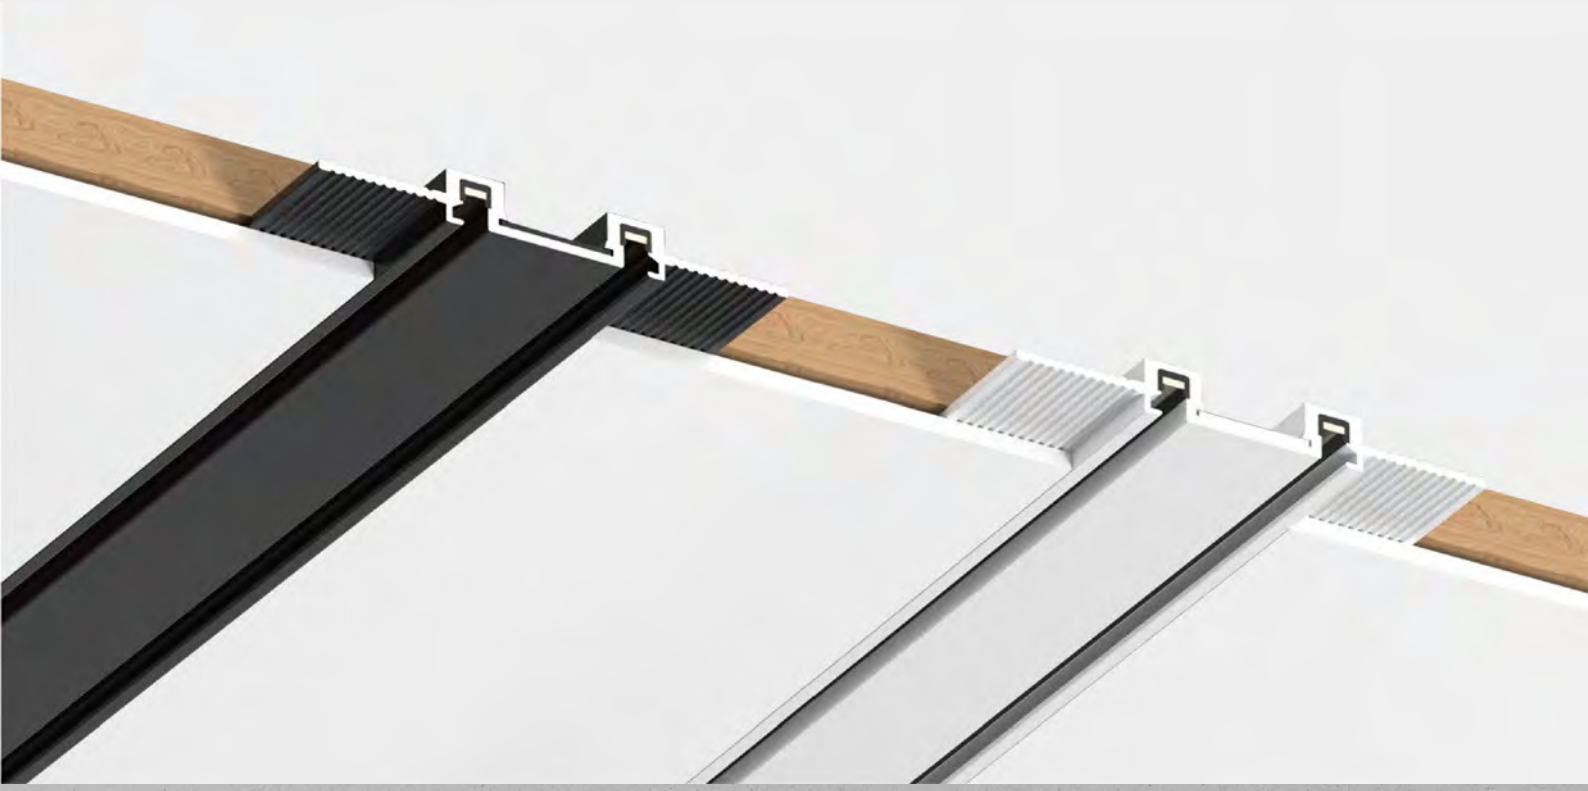

PLASTERBOARD RECESSED

Track light type	Ultra Slim Magnetic 48V
Power Supply	48Vdc
Standard Eurotrack	No
Installation	Plasterb. recessed
Material	Aluminum
Dimensions	56x26x6 mm
Lenght	2 m

	Code
	TM1002BE
	TM1002WE

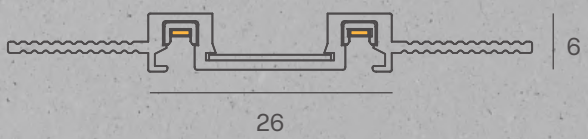

SLIM 48V SUSPENSION MAGNETIC TRACK

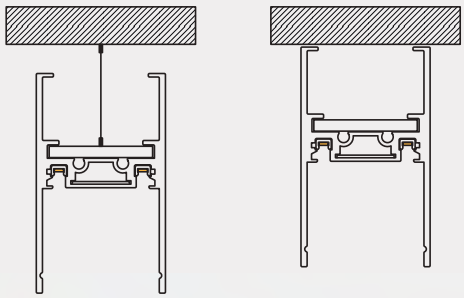

SURFACE AND SUSPENSION

Track light type	Slim Magnetic 48V
Power Supply	48Vdc
Standard Eurotrack	No
Installation	Suspension
Material	Aluminum
Dimensions	29.5x50 mm
Lenght	2 m

	Code
	TM1002BA
	TM1002WA



SLIM 48V SUSPENSION MAGNETIC TRACK

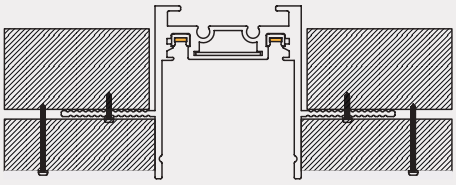

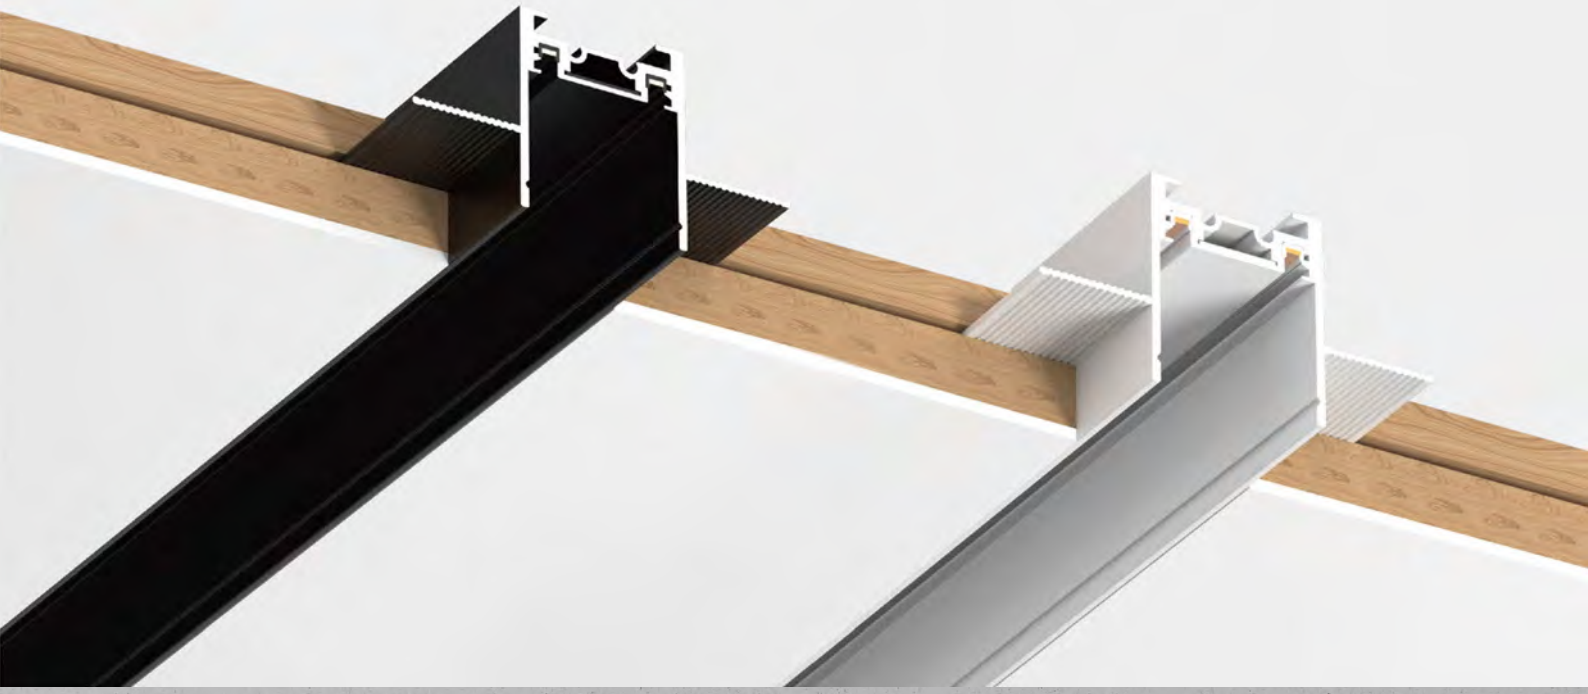

PLASTERBOARD RECESSED

Track light type	Slim Magnetic 48V
Power Supply	48Vdc
Standard Eurotrack	No
Installation	Plasterb. recessed
Material	Aluminum
Dimensions	29x67x35 mm
Lenght	2 m

	Code
	TM1002BR
	TM1002WR

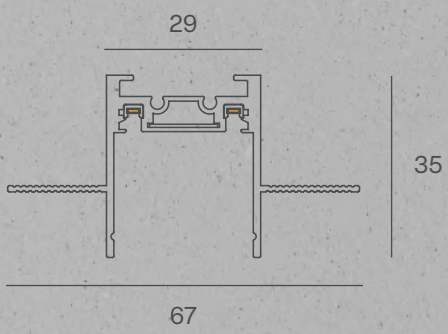

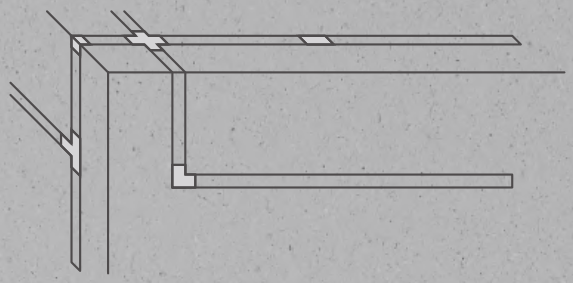

LINEAR JOINT

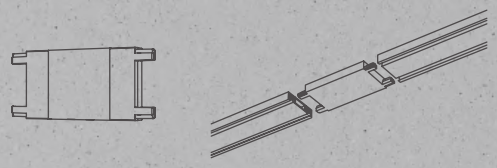

TM1000B000

TM1000W000

90° VERTICAL JOINT

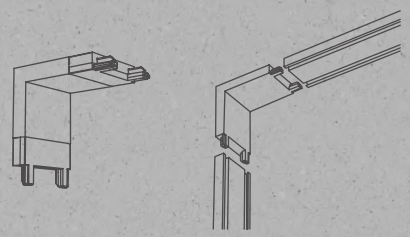

TM1000B00

TM1000W00

90° HORIZONTAL JOINT

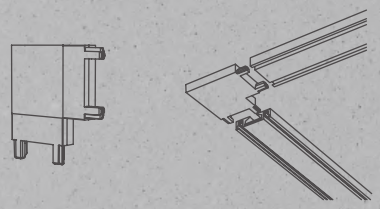

TM1000B02

TM1000W02

90° ARC JOINT



TM1000B05

TM1000W05

REVERSIBLE “T” JOINT

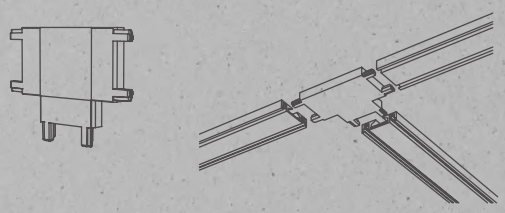

TM1000B03

TM1000W03

CROSS JOINT

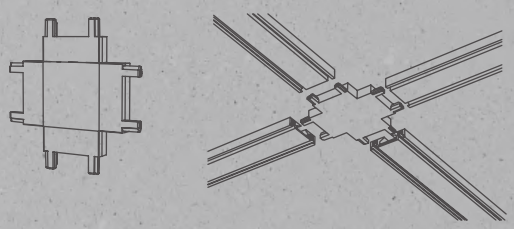

TM1000B04

TM1000W04

SLIM SUSPENSION ACCESSORIES

MAGNETIK TM10



SUSPENSION MOUNTING KIT

TM1000BSSP

90° VERTICAL JOINT



TM1000B06

TM1000W06

90° HORIZONTAL JOINT



TM1000B07

TM1000W07

SLIM RECESSED ACCESSORIES

MAGNETIK TM10



90° VERTICAL JOINT RECESSED



TM1000B08

90° HORIZONTAL JOINT RECESSED



TM1000B09

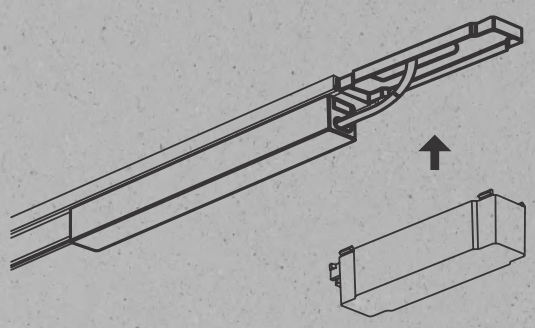

WIRING BOX



TM1000BBOX

TM1000WBOX

SHORT CABLE JOINT



TM1000BCON1

TM1000WCON1

LONG CABLE JOINT



TM1000BCON2

TM1000WCON2

CONNECTION SLAB



TM1000BSSG

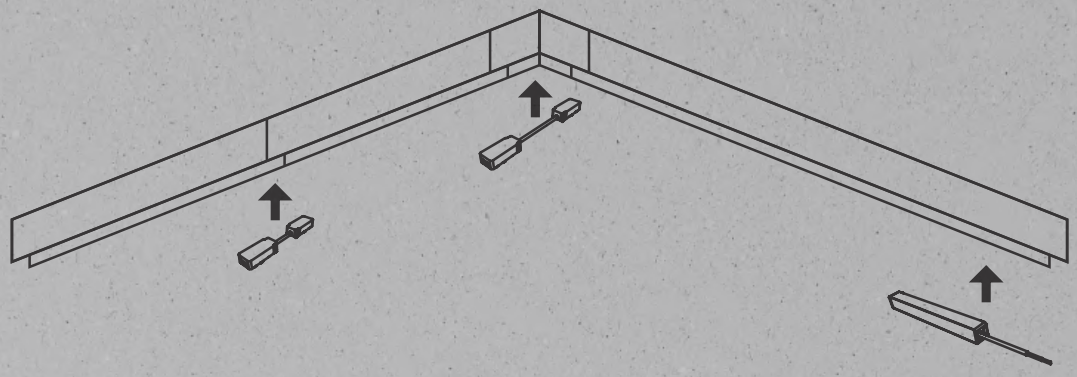

POWER SUPPLY

OUT 48 Vdc

IP20

Input voltage	230Vac
Power Supply Type	Magnetic
IN connection type	Free wires
OUT connection type	Magnetic
Compatibility	TM10
Operating temperature	-25 ~ +45°
Material	Plastic

Corrente	Power	Code
2 A	100 W	TM1100B48V
		TM1100W48V
4 A	200 W	TM1200B48V
		TM1200W48V

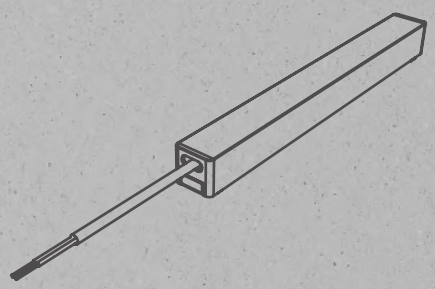

VOLTAGE INSERTER



Code
TM1000BINS
TM1000WINS

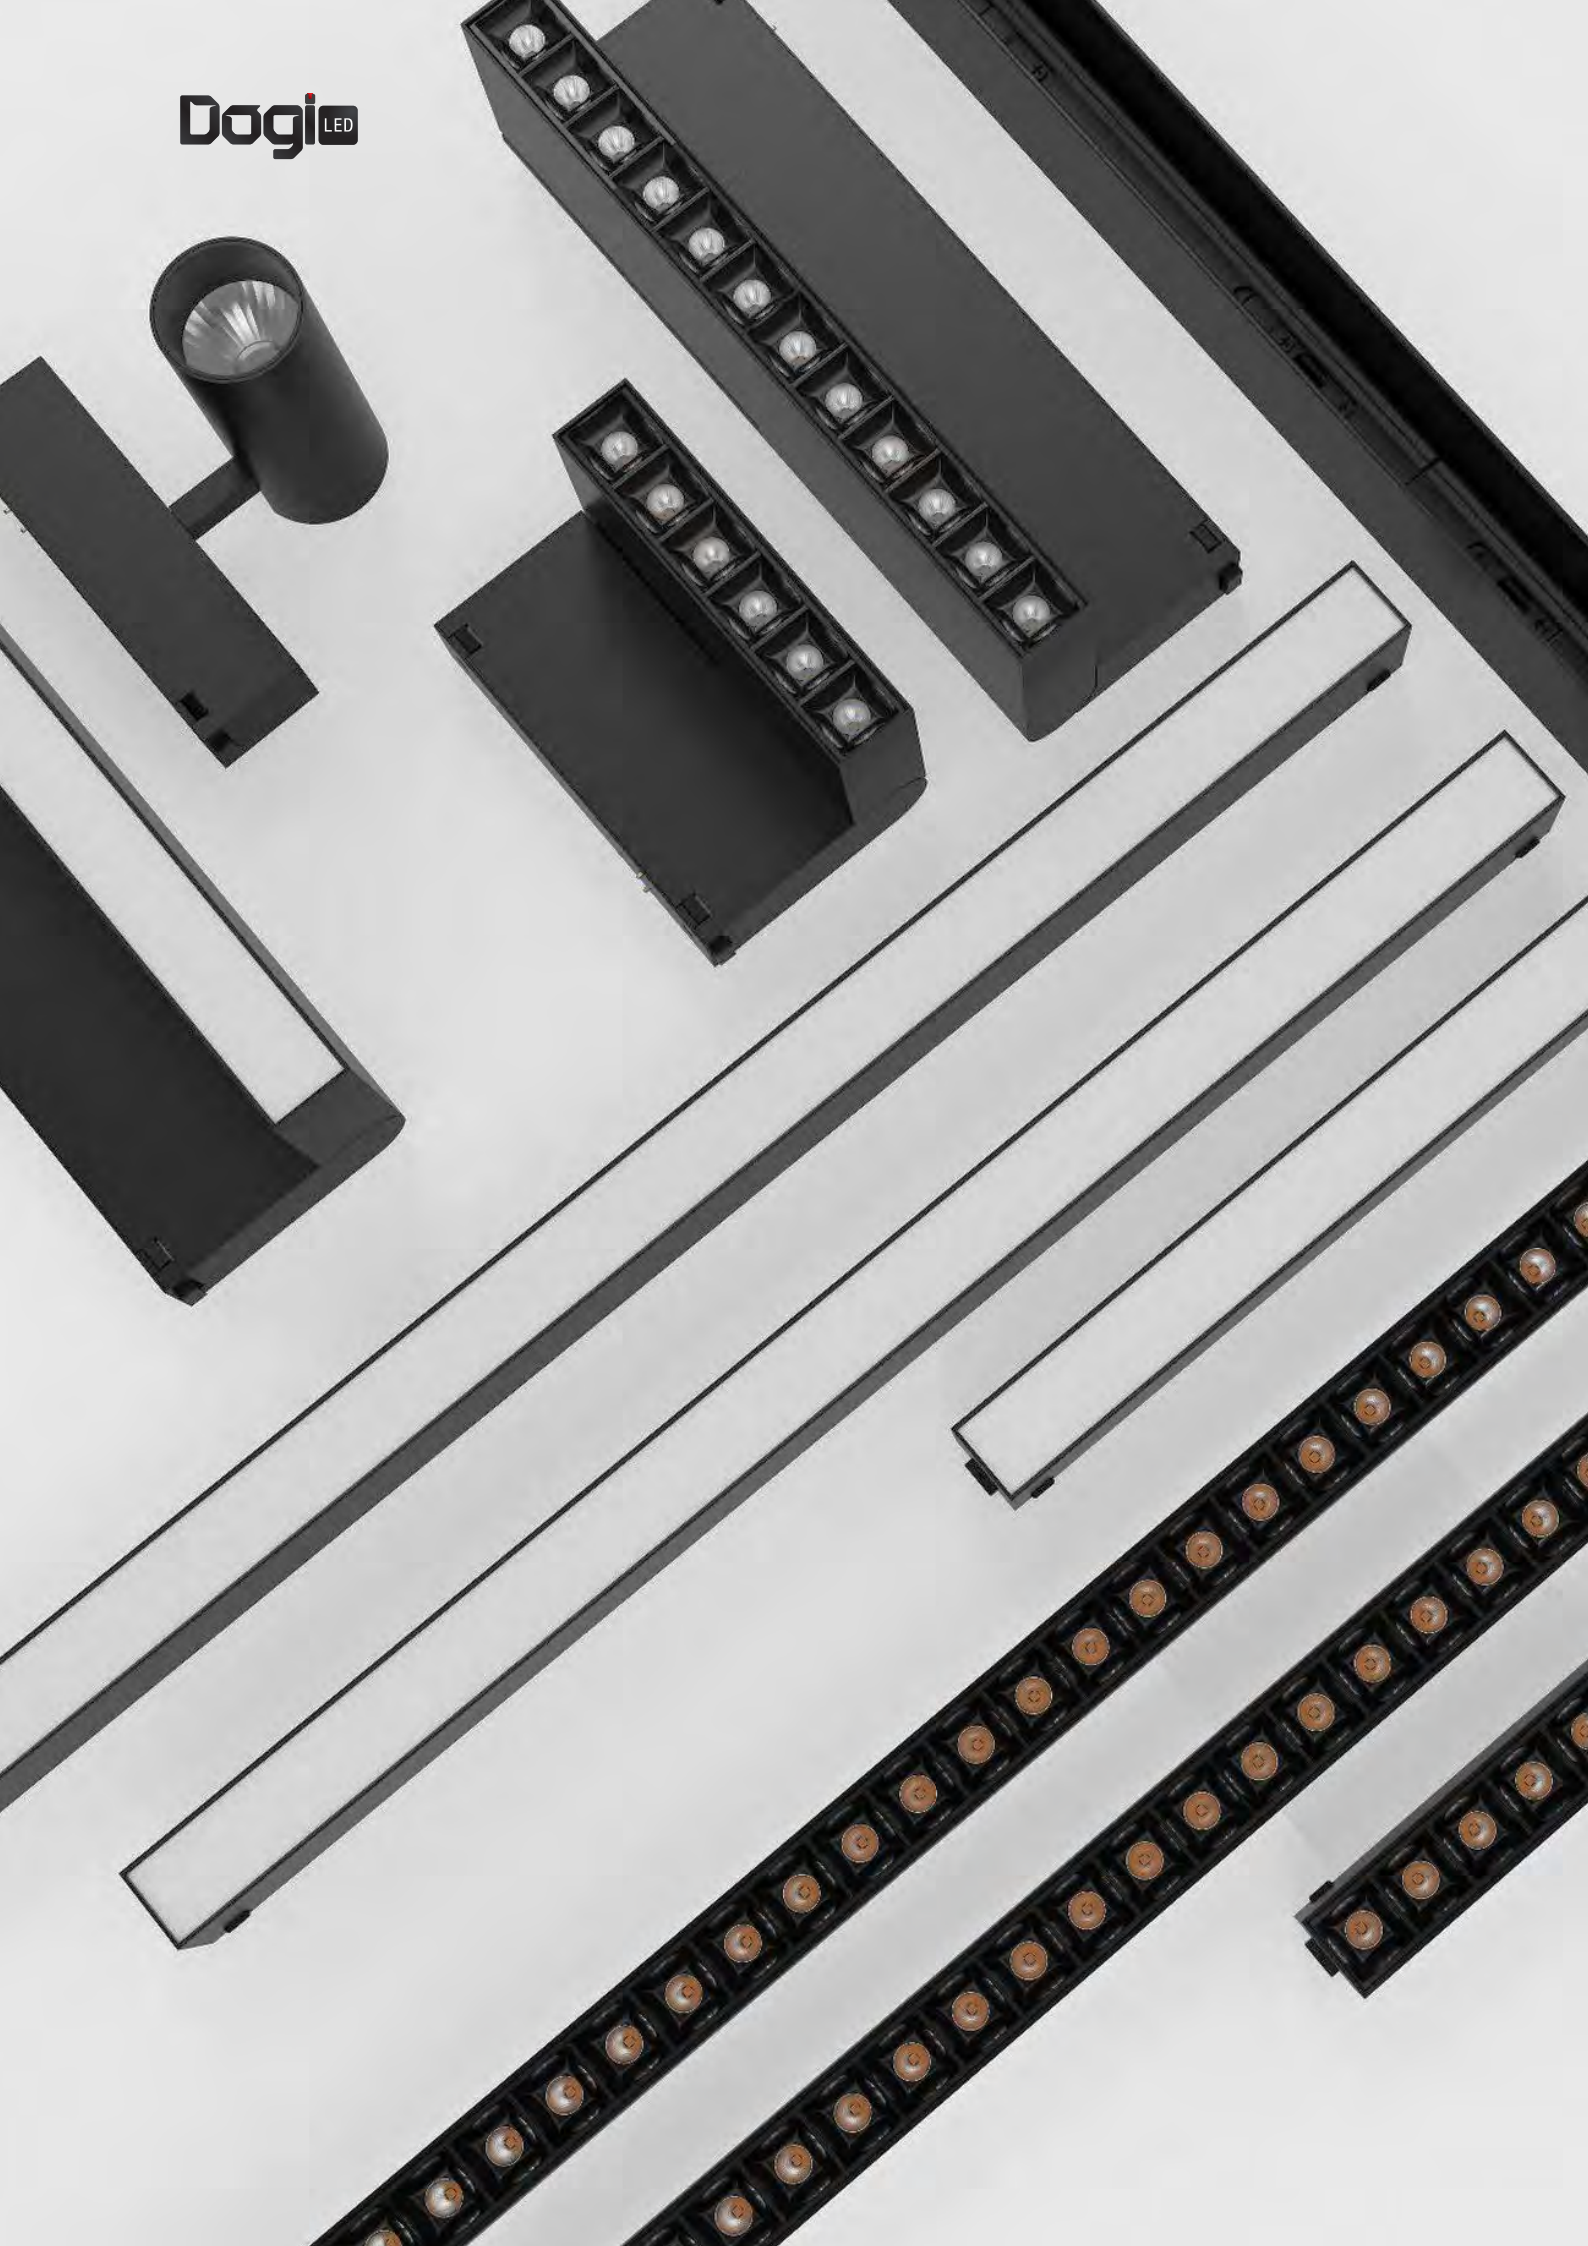
Dogi LED

MAGNETIK TM20

TRACK LIGHTS

LED BAR FOR MAGNETIC TRACK

CRI >90 | 150° | IP20 | 48V

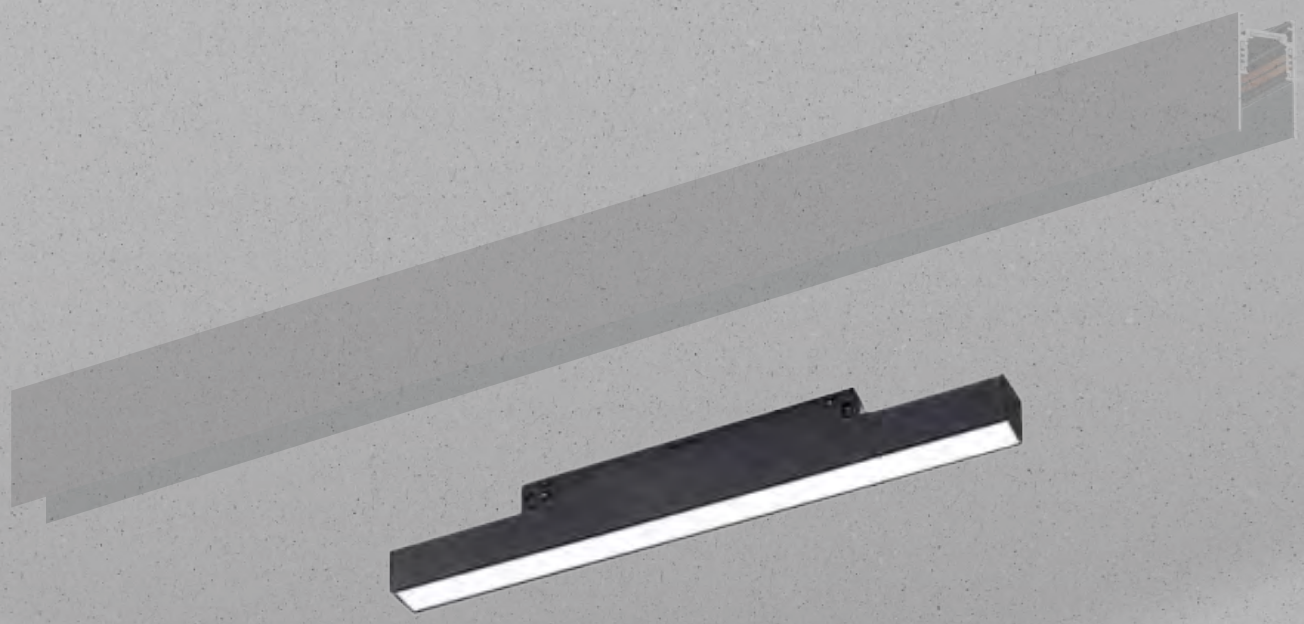

10W

Power	10 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	300x22x25 mm

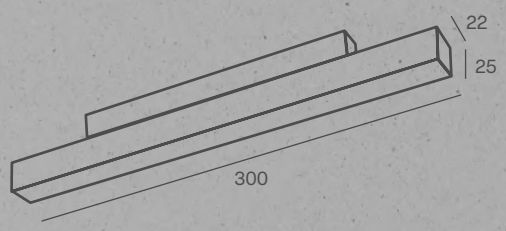

			Code
	3000K	900 lm	TM2010BC00
	CCT 3000K / 4000K / 6000K	900 lm / 950 lm / 1000 lm	TM2010BK00
	CCT 3000K / 4000K / 6000K	900 lm / 950 lm / 1000 lm	TM2010WK00

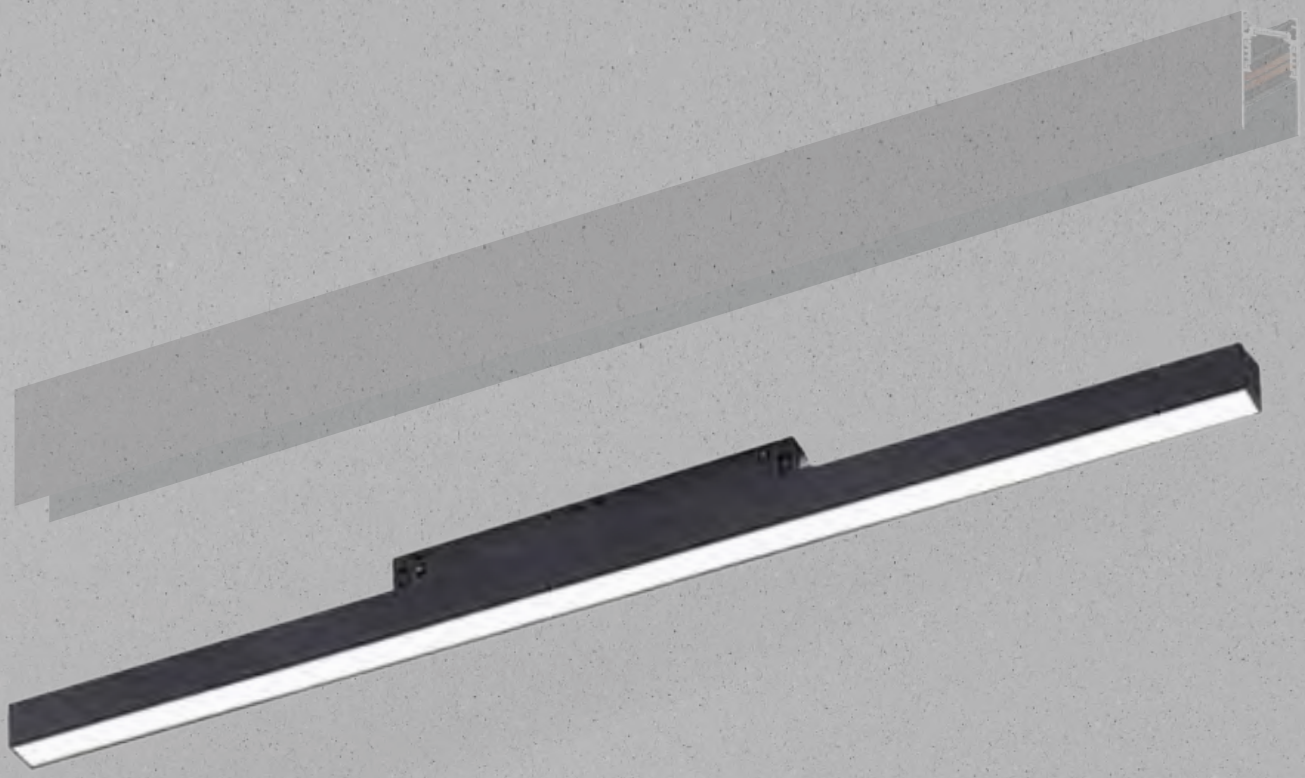

20W

Power	20 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	600x22x25 mm

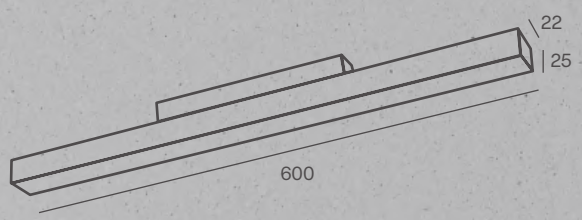

			Code
	3000K	1900 lm	TM2020BC00
	CCT 3000K / 4000K / 6000K	1900 lm / 1950 lm / 2000 lm	TM2020BK00
	CCT 3000K / 4000K / 6000K	1900 lm / 1950 lm / 2000 lm	TM2020WK00

LED GRID LAMP FOR MAGNETIC TRACK

CRI >90 | 24° | IP20 | 48V

6W

Power	6 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	112x22x25 mm

	CCT		Code
	3000K	500 lm	TM2006BK24
	4000K	550 lm	
	6000K	600 lm	
	3000K	500 lm	TM2006WK24
	4000K	550 lm	
	6000K	600 lm	



12W

Power	12 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	220x22x25 mm

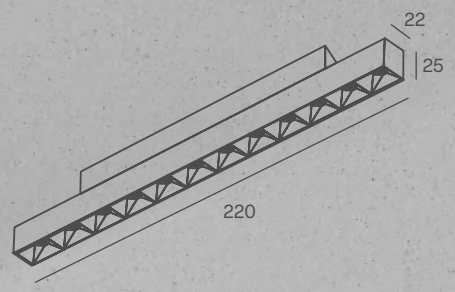

	CCT	Lm	Code
	3000K	1100 lm	TM2012BC24
	3000K	1100 lm	TM2012BK24
	4000K	1150 lm	
	6000K	1200 lm	
	3000K	1100 lm	TM2012WK24
	4000K	1150 lm	
	6000K	1200 lm	

18W

Power	18 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	330x22x25 mm

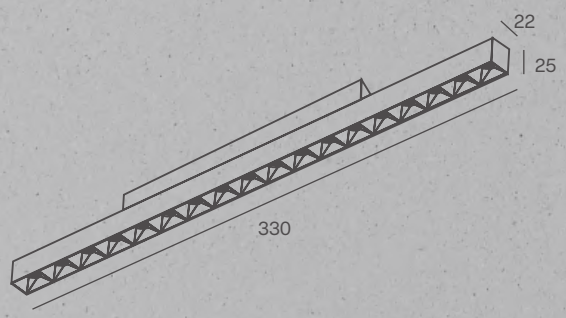

	CCT	Lm	Code
	3000K	1700 lm	TM2018BK24
	4000K	1750 lm	
	6000K	1800 lm	
	3000K	1700 lm	TM2018WC24
	3000K	1700 lm	TM2018WK24
	4000K	1750 lm	
	6000K	1800 lm	

LED GRID TILTING LAMP FOR MAGNETIC TRACK

CRI >90 | 24° | IP20 | 48V | 180°

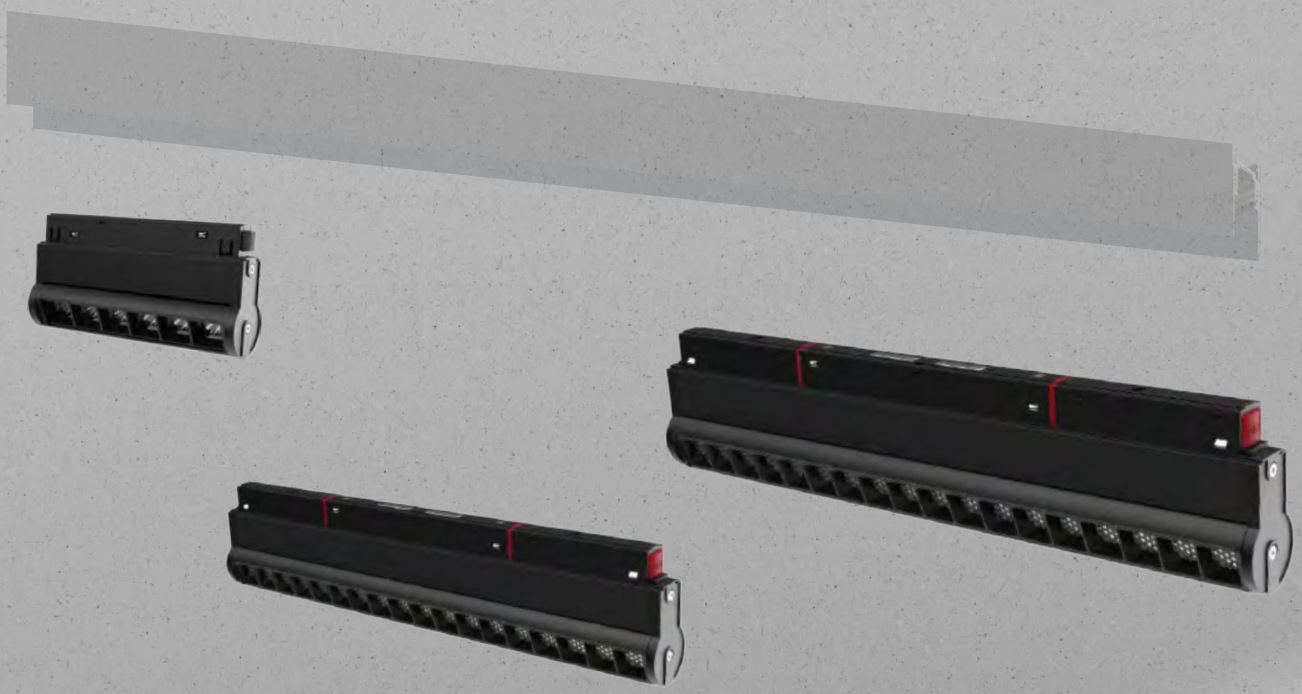

6W

Power	6 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	123x43x75 mm

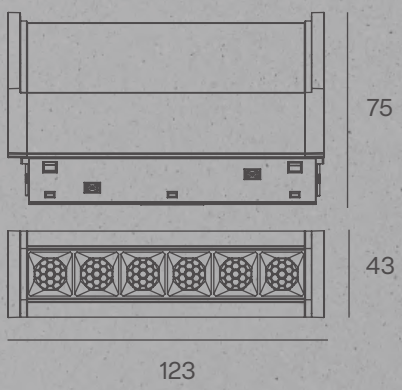

		Code
	3000K, 500 lm	TM2006BC180
	4000K, 550 lm	TM2006BN180
	6000K, 600 lm	TM2006BF180
	3000K, 500 lm	TM2006WC180
	4000K, 550 lm	TM2006WN180
	6000K, 600 lm	TM2006WF180

12W

Power	12 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	231x34x75 mm

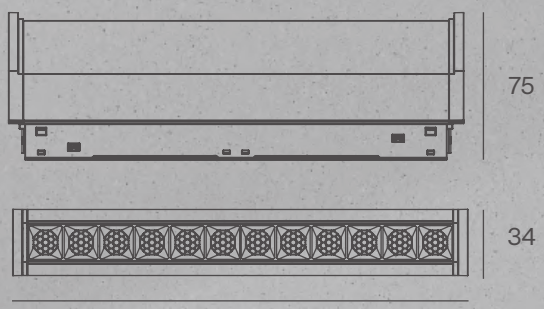

			Code
	3000K	1100 lm	TM2012BC180
	CCT 3000K / 4000K / 6000K	1100 lm / 1150 lm / 1200 lm	TM2012BK180
	CCT 3000K / 4000K / 6000K	1100 lm / 1150 lm / 1200 lm	TM2012WK180

18W

Power	18 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	339x34x75 mm

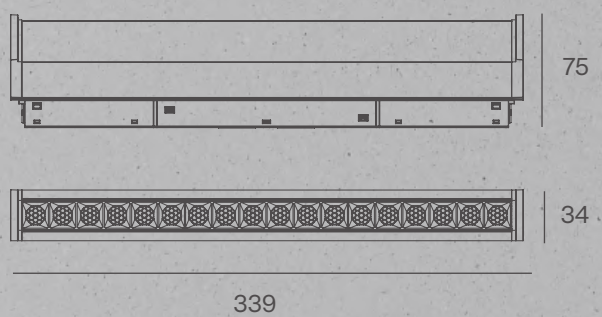

			Code
	CCT 3000K / 4000K / 6000K	1700 lm / 1750 lm / 1800 lm	TM2018BK180
	3000K	1700 lm	TM2018WC180
	CCT 3000K / 4000K / 6000K	1700 lm / 1750 lm / 1800 lm	TM2018WK180

SPOT AIR

SUSPENSION LAMP FOR MAGNETIC TRACK

CRI >90 | 24° | IP20 | 48V

Ø55

12W

Power	12 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	Ø55x300 mm

			Code
	3000K	1100 lm	TM2055PLBC
	CCT 3000K / 4000K / 6000K	1100 lm / 1150 lm / 1200 lm	TM2055PLBK
	CCT 3000K / 4000K / 6000K	1100 lm / 1150 lm / 1200 lm	TM2055PLWK

SPOTLIGHT ZOOM

MAGNETIC TRACK SPOTLIGHT

CRI >90 | ZOOM | IP20 | 48V

15W

Power	15 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	Ø55x115 mm

	CCT		Code
	3000K	1400 lm	TM5515BKZ
	4000K	1450 lm	
	6000K	1500 lm	
	3000K	1400 lm	TM5515WKZ
	4000K	1450 lm	
	6000K	1500 lm	



Ø55

20W

Power	20 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	Ø65x135 mm

	CCT		Code
	3000K	1900 lm	TM6515BKZ
	4000K	1950 lm	
	6000K	2000 lm	
	3000K	1900 lm	TM6515WKZ
	4000K	1950 lm	
	6000K	2000 lm	



Ø65

MAGNETIC TRACK SPOTLIGHT

CRI >90 | 24° | IP20 | 48V

15W

Power	15 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	Ø55x115 mm



Ø55

		Code
	3000K, 1400 lm	TM5515BC24
	CCT: 3000K 1400 lm; 4000K 1450 lm; 6000K 1500 lm	TM5515BK24
	3000K, 1400 lm	TM5515WC24
	CCT: 3000K 1400 lm; 4000K 1450 lm; 6000K 1500 lm	TM5515WK24

20W

Power	20 W
Power Supply	48Vdc
Life	20000 h
Compatibility	TM20
Material Base	Aluminum
Material Cover	Plastic
Dimensions	Ø65x135 mm



Ø65

		Code
	3000K, 1900 lm	TM6515BC24
	CCT: 3000K 1900 lm; 4000K 1950 lm; 6000K 2000 lm	TM6515BK24
	3000K, 1900 lm	TM6515WC24
	CCT: 3000K 1900 lm; 4000K 1950 lm; 6000K 2000 lm	TM6515WK24

SURFACE MAGNETIC TRACK

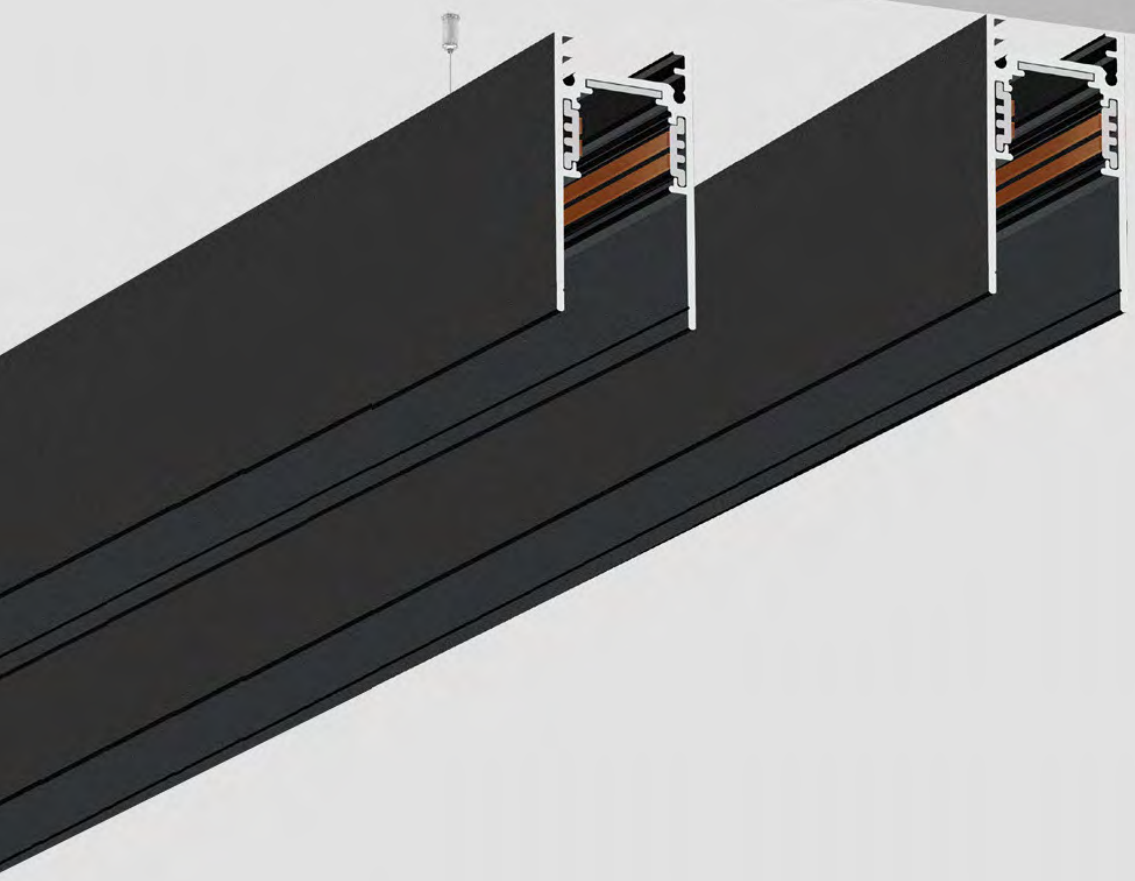

SURFACE AND SUSPENSION

Track light type	Magnetic 48Vdc
Power Supply	48Vdc
Standard Eurotrack	No
Installation	Surface
Material	Aluminum
Dimensions	27.5x52 mm
Lenght	2 m

	Code
	TM2002BS
	TM2002WS

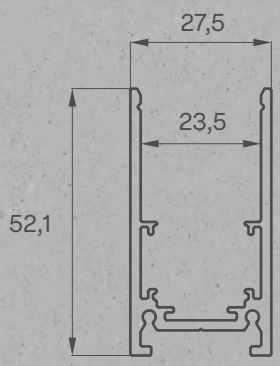

PLASTERBOARD RECESSED MAGNETIC TRACK

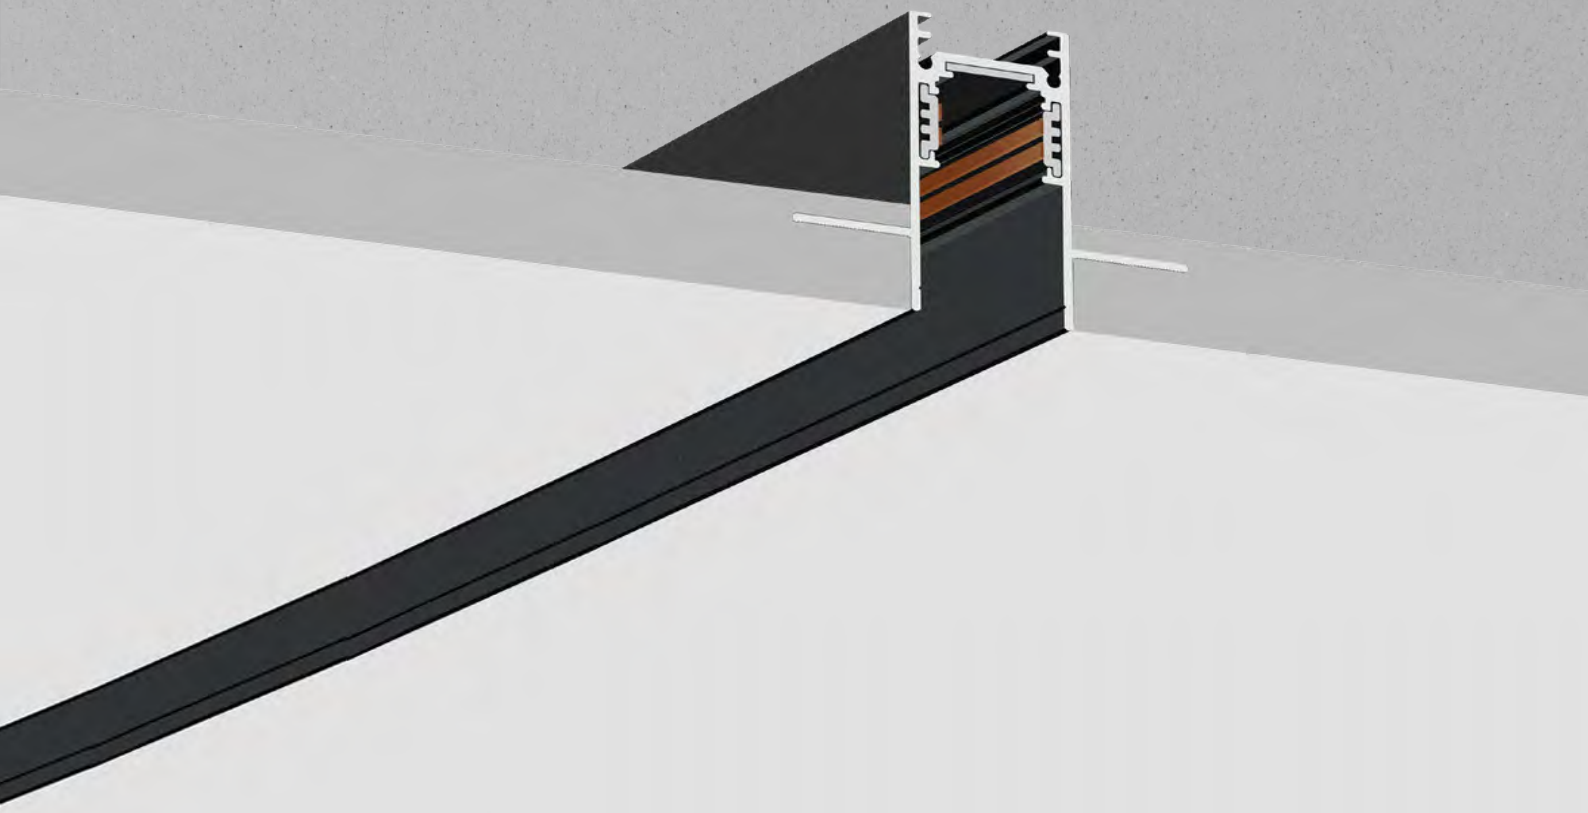

PLASTERBOARD RECESSED

Track light type	Magnetic 48Vdc
Power Supply	48Vdc
Standard Eurotrack	No
Installation	Plasterb. recessed
Material	Aluminum
Dimensions	62,5x46,8 mm
Lenght	2 m

Code
TM2002BR
TM2002WR

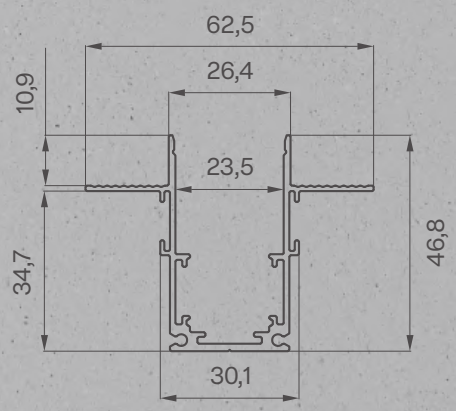

ACCESSORIES

MAGNETIK TM20

90° CONNECTOR FOR MAGNETIC TRACK



TM2090BS

TM2090WS

90° CONNECTOR FOR MAGNETIC TRACK



TM2090BSV

TM2090WSV

SUSPENSION ACCESSORIES

MAGNETIK TM20

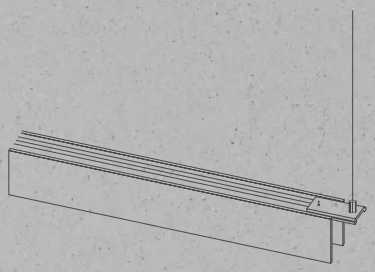

ACCESSORIES KIT FOR MOUNTING SUSPENSION TRACK



TM10SPK

RECESSED ACCESSORIES

MAGNETIK TM20



90° CONNECTOR FOR MAGNETIC TRACK



TM2090BH

TM2090WH

90° CONNECTOR FOR MAGNETIC TRACK

TM2090BV

TM2090WV

CONNECTORS

STRAIGHT CONNECTOR FOR MAGNETIC TRACK

TM20BCD

TM20WCD

DOUBLE CONNECTOR FOR MAGNETIC TRACK



TM20BCF

TM20WCF

MAGNETIC BINARY WIRE CONNECTOR

TM20BCW

TM20WCW

STRAIGHT METAL SLAB FOR MAGNETIC TRACK



TM20BG

MAGNETIC TRACK FLEX CONNECTOR

TM20BWC

TM20WWC

DRIVER

POWER SUPPLY 48V MAGNETIC TRACK

Input voltage	230Vac
Power Supply Type	Magnetic
IN connection type	Free wires
OUT connection type	Magnetic
Compatibility	TM20
Operating temperature	-25 - +45°
Material	Plastic

Corrente	Power	Code
2 A	100 W	TM1000BA
		TM1000WA
4 A	200 W	TM2000BA
		TM2000WA



PROFILES

Dogi LED manages a wide range of extruded aluminum profiles up to 3 meters and polycarbonate diffusers, transparent and opaline, reaching 30 meters in length, complete with accessories that allow installation in any situation.

Our strength is the processing of “custom” products that allows us to create lighting fixtures complete with strips and electrical components in standard silver, white and black finishes.

Upon request, in addition to cutting and bending, Dogi LED offers the customer the possibility of “custom finishing” painting made with professional liquid or powder processes, in the available RAL color range.

Dogi production is able to couple aluminum profiles with plasterboard sheets (standard, water-repellent and fireproof) to create a turnkey solution, making installation and installation simple.

SUPPORT

PRF045


p. 298

PRF057


p. 318

PRF037


p. 282

AT1002

p. 226

KIT AT2004


p. 408

PRF004


p. 234

PRF030


FLEX
p. 266

PRF026


p. 262

PRF003


p. 230

PRF006


p. 242

PRF031


p. 270

WALL

PRF071


p. 350

PRF034


p. 278

PRF016


p. 258

PLAFONE AND SUSPENSION

PRF061



p. **330**

PRF049



p. **306**

PRF040



p. **290**

PRF012



p. **250**

PRF060



p. **326**

PRF050



p. **310**

PRF042



p. **294**

PRF032



p. **274**

ANGLE

PRF007



p. **246**

KIT AT2007



p. **410**

PRF065



p. **334**

KIT AT2027



p. **411**

PRF008



p. **227**

RECESSED

PRF046



p. 302

KIT AT2005



p. 409

PRF005



p. 238

PRF038



p. 286

PRF013



p. 254

PAIRED PLASTERBOARD

PRC073



p. 390

PRC074



p. 394

PRC099



p. 398

INTEGRATED PLASTERBOARD

PRC2004



p. 402

PRC2005



p. 406

FOR PLASTERBOARD

KIT AT2073



p. **412**

KIT AT2074



p. **413**

PRF073



p. **354**

PRF074



p. **358**

PRF090



p. **370**

PRF094



FLEX

p. **374**

PRF095



FLEX

p. **378**

PRF096



p. **382**

PRF079



p. **362**

PRF068



p. **338**

PRF069



p. **342**

PRF070



p. **346**

PRF059



p. **322**

PRF098



p. **386**

PRF084



p. **366**

PRF054



p. **314**

AT1002

Anodized extruded aluminum plate, dedicated for cooling LED strips, to be used without cover or fixing clip

MAX
12 mm

MAX
9.6 W/m

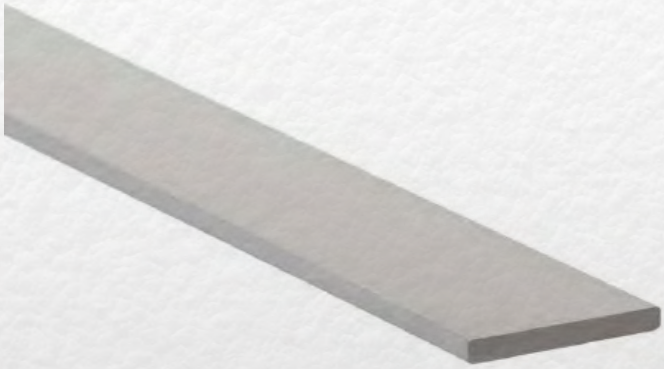

Total lenght	12 mm
Strip max clutter	12 mm
Height	2 mm
Profile type	Support
Applicable strip power	9.6 W/m
Bendable	No

Lenght	Finish	Code
2 m		AT1002

INSTALLATION

WALL - CEILING - SHELVES

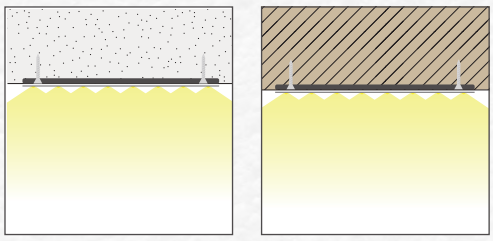

PRF008

Anodized extruded aluminum plate, dedicated for cooling LED strips, to be used without cover or fixing clip

MAX
14 mm

MAX
9.6 W/m

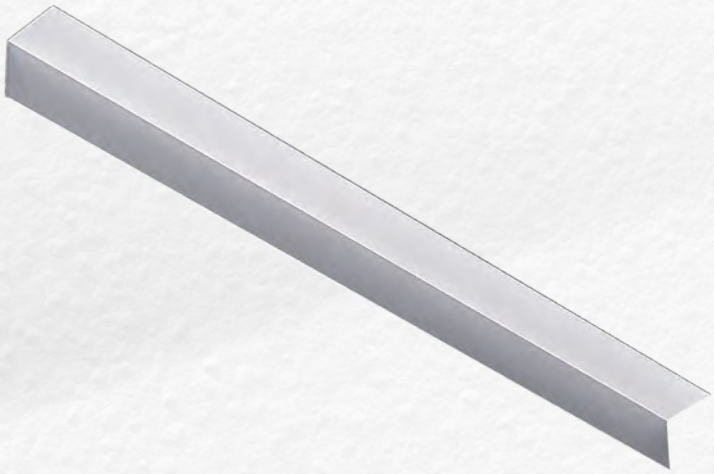

Total lenght	15 mm
Strip max clutter	14 mm
Height	15 mm
Profile type	Angle
Applicable strip power	9.6 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF008/200

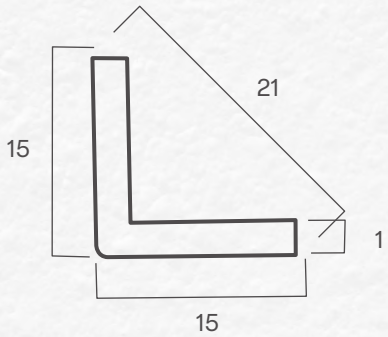

INSTALLATION

WALL - CEILING - SHELVES

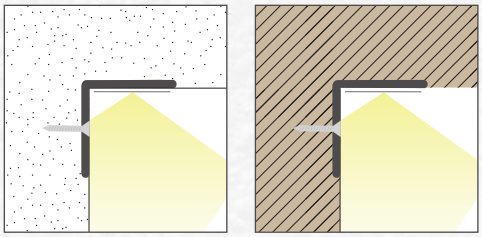

PRF003

Extruded aluminum profile with flat screen or curved cover, can be installed on a corner wall or ceiling, in direct support. Its slightly rounded base makes it ideal for lighting coves with the possibility of directing the light beam into the corners, or for providing ambient light with ceiling installation.

Custom Finishing

MAX 10 mm

MAX 14.4 W/m

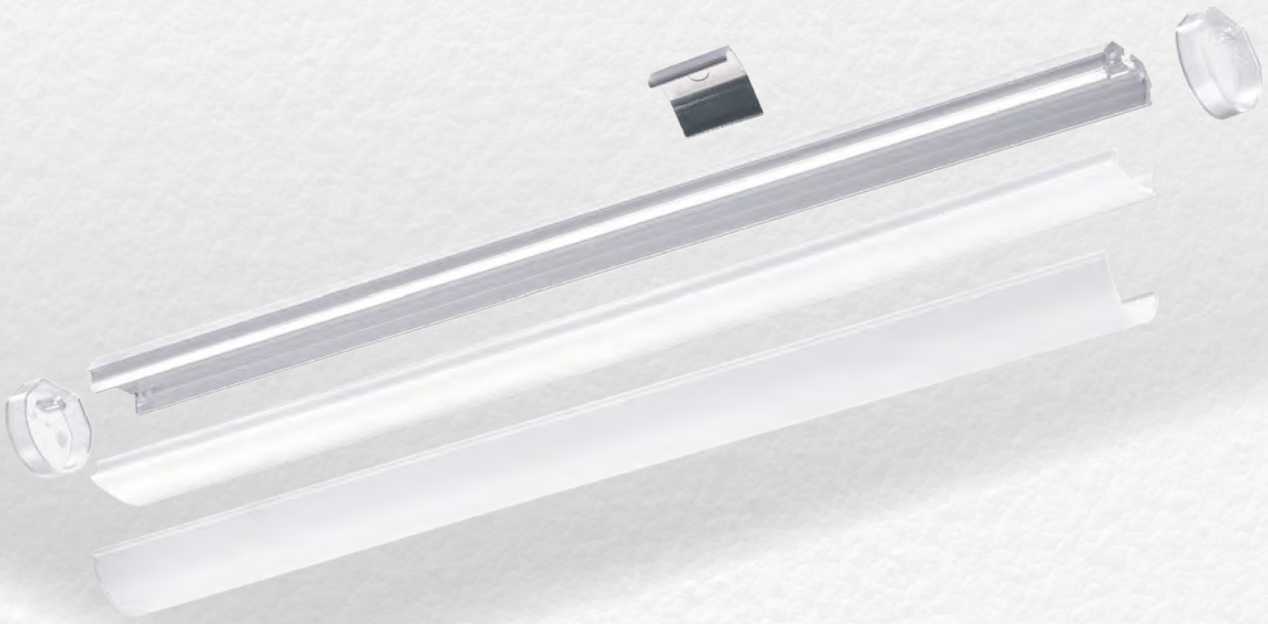

Total lenght	18 mm
Strip max clutter	10 mm
Height	8,6 mm
Profile type	Round
Applicable strip power	14.4 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF003/100
		PRF003/100W
		PRF003/100B
2 m		PRF003/200
		PRF003/200W
		PRF003/200B
3 m		PRF003/300
		PRF003/300W
		PRF003/300B

ACCESSORIES

PRF003

COVER



Opal Polycarbonate 1m	PRF003PX11
Opal Polycarbonate 2m	PRF003PX01
Opal Polycarbonate 3m	PRF003PX31



PMMA satin 1m	PRF003PX13
PMMA satin 3m	PRF003PX33
PMMA satin 2m	PRF003PX03

CAPS

Transparent plastic	PRF003TP01
Grey metal	PRF003TP21
White metal	PRF003TP22
Black metal	PRF003TP24

BRACKET



Metal bracket	PRF003ST02

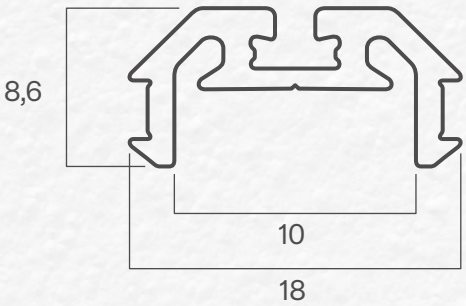

INSTALLATION

WALL - CEILING

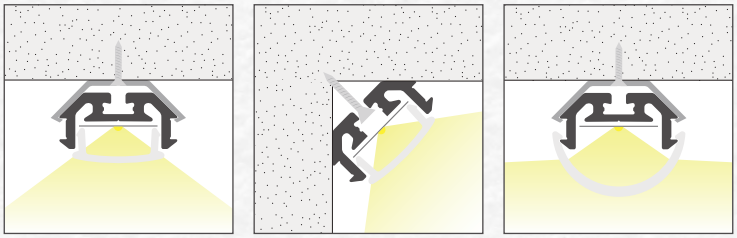

PRF004

Rectangular section extruded aluminum profile without flanges and with flat cover. The accessories make it installable on the wall and ceiling, resting or recessed in the milling, to illuminate cabinets or shelves.

Custom Finishing

MAX 12 mm

MAX 14.4 W/m

Total lenght	17,5 mm
Strip max clutter	12 mm
Height	8 mm
Profile type	Support
Applicable strip power	14.4 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF004/100
		PRF004/100W
		PRF004/100B
2 m		PRF004/200
		PRF004/200W
		PRF004/200B
3 m		PRF004/300
		PRF004/300W
		PRF004/300B

ACCESSORIES

PRF004

COVERS		Opal Polycarbonate 1m	PRF003PX11
		Opal Polycarbonate 2m	PRF003PX01
		Opal Polycarbonate 3m	PRF003PX31
CAPS		Grey plastic	PRF004TP01
		White plastic	PRF004TP02
		Black plastic	PRF004TP03
BRACKETS		Plastic bracket	PRF004ST01
		Metal bracket	PRF004ST02
CONNECTOR		Grey linear connector	PRF004CL01
		Grey 90° connector	PRF004CN01

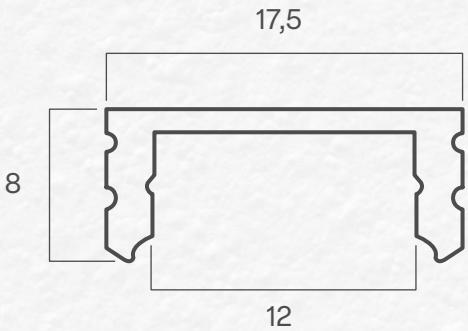

INSTALLATION

WALL - CEILING - BUILT-IN FURNITURE

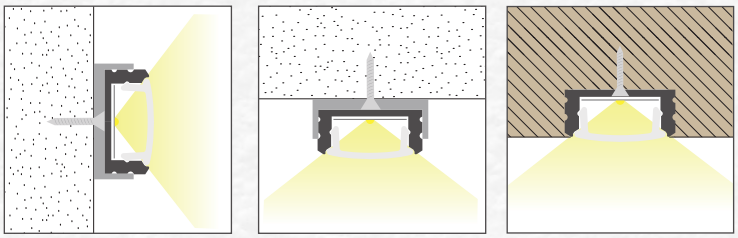

PRF005

Rectangular section extruded aluminum profile with flanges and flat cover, can be installed flush. With its reduced thickness it is ideal for being recessed in shelves, cabinets and more generally in furniture.

Custom Finishing

MAX 12 mm

MAX 14.4 W/m

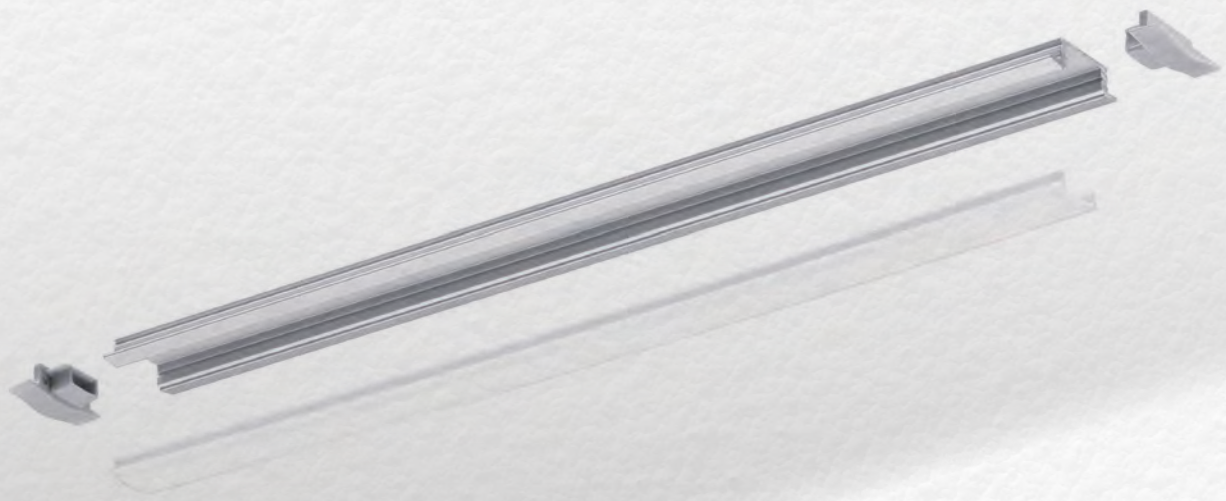

Total lenght	25,7 mm
Strip max clutter	12 mm
Height	8 mm
Profile type	Support
Applicable strip power	14.4 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF005/100
		PRF005/100W
		PRF005/100B
2 m		PRF005/200
		PRF005/200W
		PRF005/200B
3 m		PRF005/300
		PRF005/300W
		PRF005/300B

COVERS



Opal Polycarbonate 1m	PRF003PX11
Opal Polycarbonate 2m	PRF003PX01
Opal Polycarbonate 3m	PRF003PX31

CAPS

Grey plastic	PRF005TP01
White plastic	PRF005TP02
Black plastic	PRF005TP03

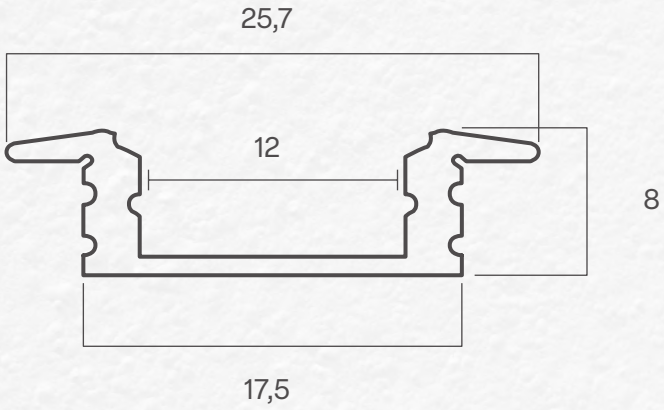

INSTALLATION

RECESSED CEILING - FURNITURE

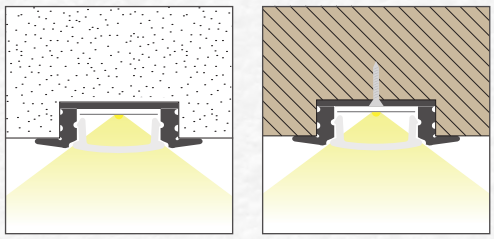

5:17

PRF006

Extruded aluminum profile with flat screen or curved cover, can be installed on a corner wall or ceiling, directly supported or suspended. Its slightly rounded base makes it ideal for lighting coves with the possibility of directing the light beam into the corners, or for providing ambient light with suspended or ceiling installation.

Custom Finishing

MAX 12 mm

MAX 23 W/m

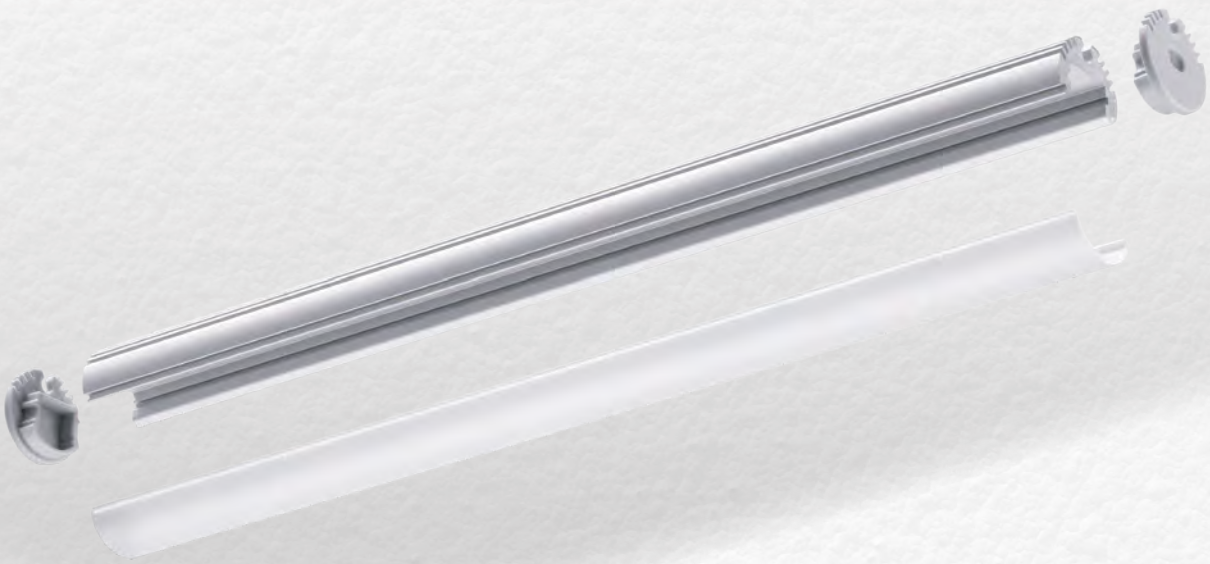

Total lenght	21 mm
Strip max clutter	12 mm
Height	14,5 mm
Profile type	Round
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF006/100
		PRF006/100W
		PRF006/100B
2 m		PRF006/200
		PRF006/200W
		PRF006/200B
3 m		PRF006/300
		PRF006/300W
		PRF006/300B

ACCESSORIES

PRF006

COVERS



PMMA satin 1m	PRF006PX13
PMMA satin 2m	PRF006PX03
PMMA satin 3m	PRF006PX33

CAPS

Grey plastic	PRF006TP01
White plastic	PRF006TP02
Black plastic	PRF006TP04

BRACKETS

Kit di sospensione con sfera, cavo 1.5m	SSP001

Metal bracket	PRF006ST01

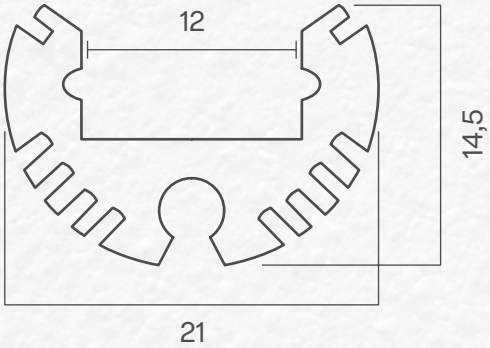

INSTALLATION

WALL - CEILING - SUSPENSION





PRF007

45° angular extruded aluminum profile. The full-screen diffuser makes the structure invisible, ideal for installation under kitchen cabinets or furniture shelves, also useful for illuminating ceilings with exposed beams.

Custom Finishing

MAX 10 mm

MAX 19.2 W/m

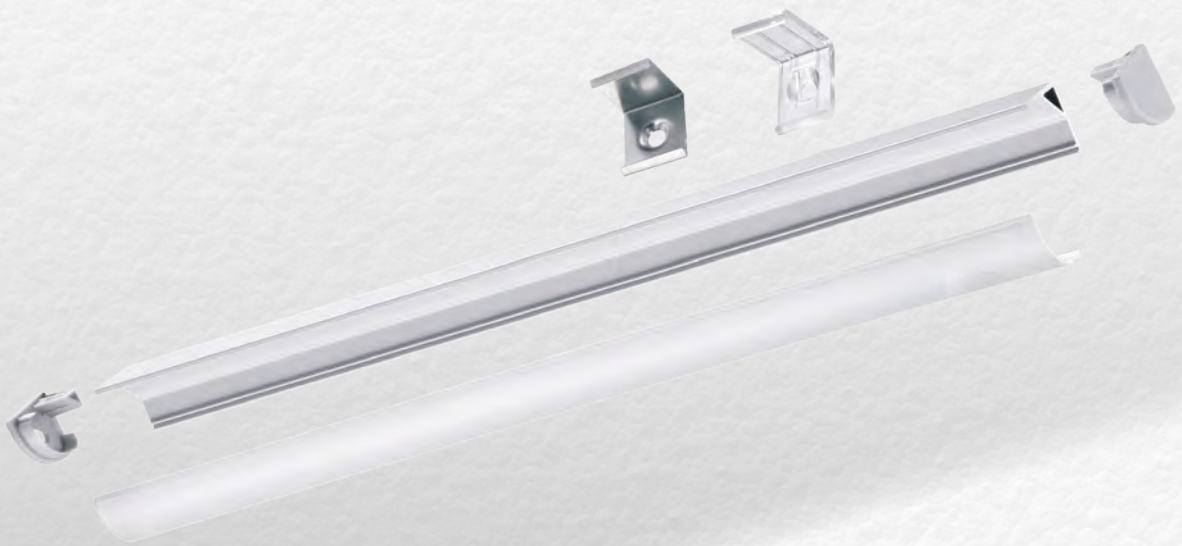

Total lenght	16 mm
Strip max clutter	10 mm
Height	16 mm
Profile type	Angle
Applicable strip power	19.2 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF007/100
		PRF007/100W
		PRF007/100B
2 m		PRF007/200
		PRF007/200W
		PRF007/200B
3 m		PRF007/300
		PRF007/300W
		PRF007/300B



ACCESSORIES

PRF007

COVERS



PMMA satin 1m	PRF007PX13
PMMA satin 2m	PRF007PX03
PMMA satin 3m	PRF007PX33
Opal Polycarbonate white 1m	PRF007PX15
Opal Polycarbonate white 2m	PRF007PX05
Opal Polycarbonate white 3m	PRF007PX35



PMMA satin angle	PRF007PX07

CAPS

Grey plastic	PRF007TP01
White plastic	PRF007TP02
Black plastic	PRF007TP04

BRACKETS

Plastic bracket	PRF007ST01
Metal bracket	PRF007ST02

CONNETTORI



Grey linear connector	PRF007CL01
White linear connector	PRF007CL02
Black linear connector	PRF007CL03

Grey angle connector	PRF007CN01
White angle connector	PRF007CN02
Black angle connector	PRF007CN03

INSTALLATION

WALL - CEILING



PRF012

U-shaped anodized extruded aluminum profile. The important design makes it highly dissipative and with a large exchange surface. Ideal for ceiling or suspension installation using accessories.

Custom Finishing

MAX 19 mm

MAX 23 W/m

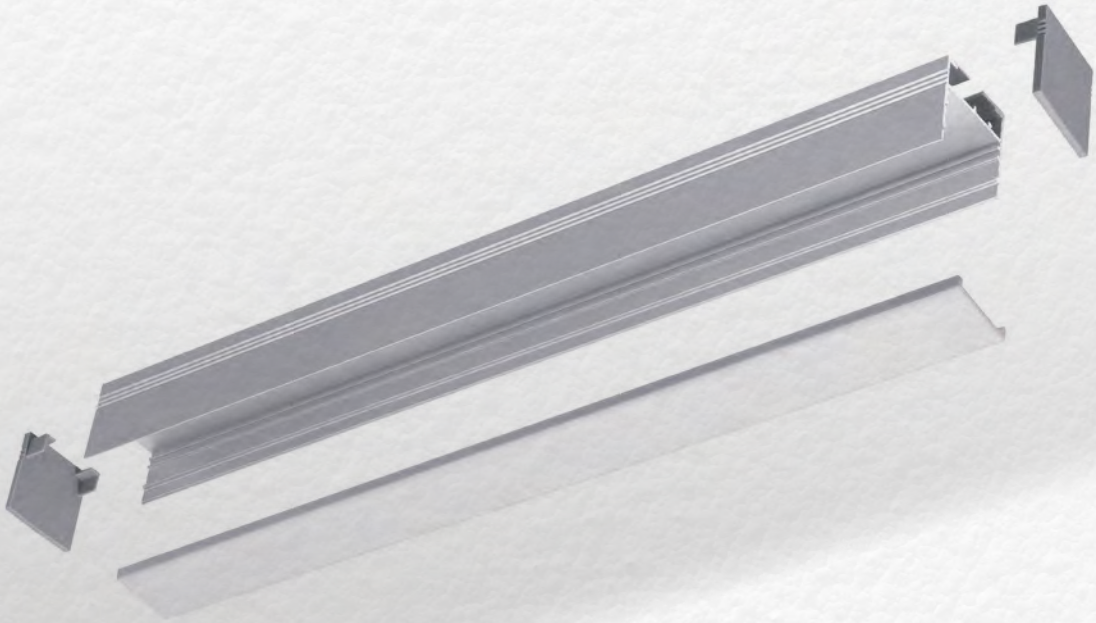

Total lenght	22,5 mm
Strip max clutter	19 mm
Height	25 mm
Profile type	Support
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF012/100
		PRF012/100W
		PRF012/100B
2 m		PRF012/200
		PRF012/200W
		PRF012/200B
3 m		PRF012/300
		PRF012/300W
		PRF012/300B

ACCESSORIES

PRF012

COVERS



Opal Polycarbonate 1m	PRF012PX11
Opal Polycarbonate 2m	PRF012PX01
Opal Polycarbonate 3m	PRF012PX31

CAPS



Grey plastic	PRF012TP01
White plastic	PRF012TP02
Black plastic	PRF012TP04

BRACKETS

Suspension kit with terminals 1,5m (2 pcs)	SSP002

Metal spring bracket for recessed profiles	PRF020ST01

Ceiling bracket	PRF040ST03

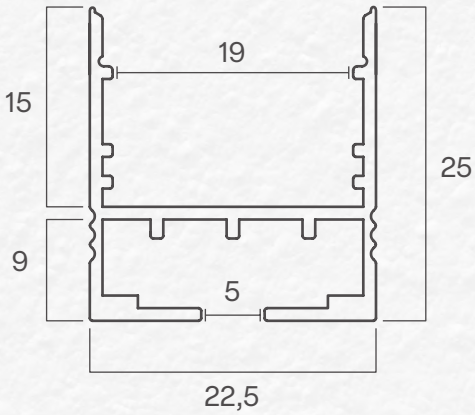

INSTALLATION

WALL - CEILING - SUSPENSION







PRF013

U-shaped anodized extruded aluminum profile with flanges. The important design makes it highly dissipative and with a large exchange surface. Ideal for recessed ceiling or wall installation using accessories.

Custom Finishing

MAX 19 mm

MAX 23 W/m

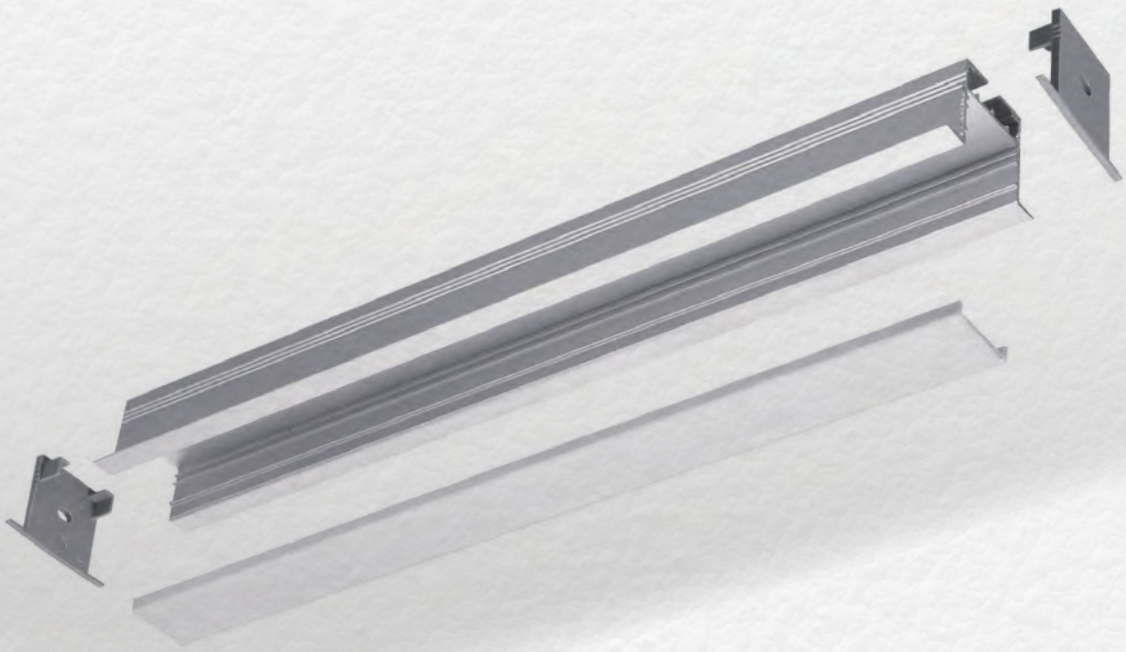

Total lenght	35 mm
Strip max clutter	19 mm
Height	25 mm
Profile type	Recessed
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF013/100
		PRF013/100W
		PRF013/100B
2 m		PRF013/200
		PRF013/200W
		PRF013/200B
3 m		PRF013/300
		PRF013/300W
		PRF013/300B

ACCESSORIES

PRF013

COVERS		Opal Polycarbonate 1m	PRF013PX11
		Opal Polycarbonate 2m	PRF013PX01
		Opal Polycarbonate 3m	PRF013PX31
CAPS		Grey plastic	PRF013TP01
		White plastic	PRF013TP02
		Black plastic	PRF013TP03
BRACKETS		Metal spring bracket for recessed profiles	PRF013ST01

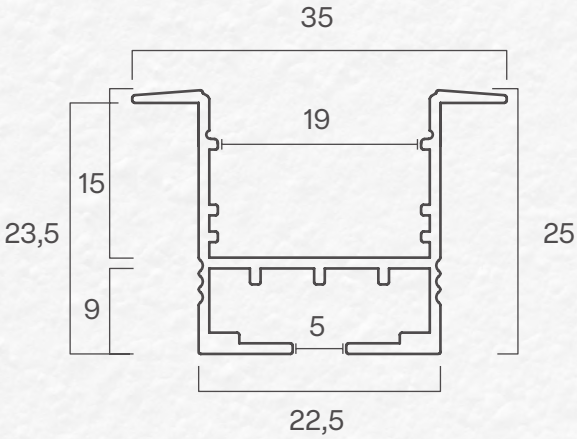

INSTALLATION

CEILING - RECESSED





Anodized aluminum extruded profile with H bi-emission. Designed to house two LED strips on the sides; the central compartment allows the power driver to be integrated inside. Ideal for wall lighting with Up&Down light beam.

Custom Finishing

MAX 25 mm

MAX 23 W/m

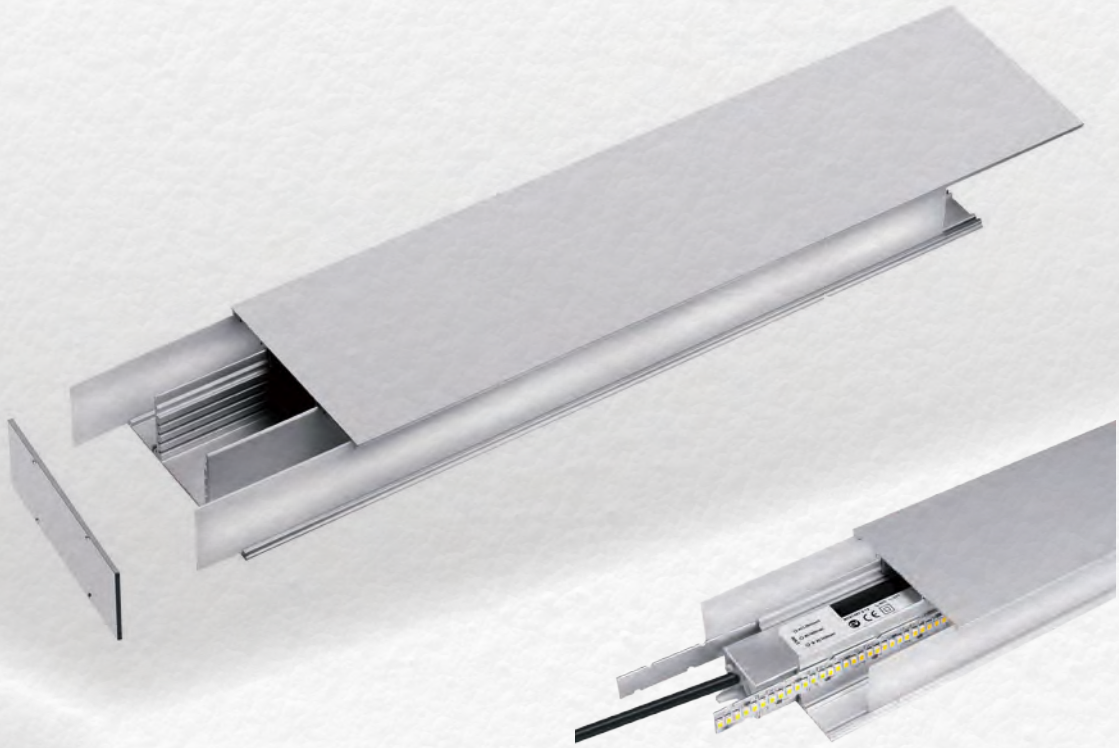

Total lenght	32,7 mm
Strip max clutter	25 mm
Height	85 mm
Profile type	Support
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF016/100W
		PRF016/100G
2 m		PRF016/200W
		PRF016/200G
3 m		PRF016/300W
		PRF016/300G

COVERS



Transparent polycarbonate 1m	PRF016PX12
Transparent polycarbonate 2m	PRF016PX02
Transparent polycarbonate 3m	PRF016PX32
Opal Polycarbonate 1m	PRF016PX11
Opal Polycarbonate 2m	PRF016PX01
Opal Polycarbonate 3m	PRF016PX31

CAPS



Grey plastic	PRF016TP01
White plastic	PRF016TP02

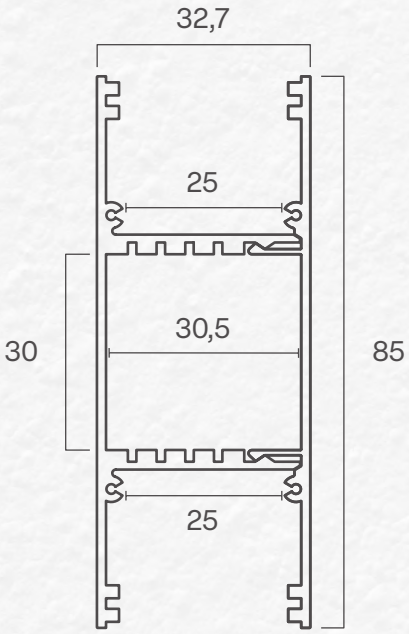

INSTALLATION

WALL



PRF026

U-shaped anodized extruded aluminum profile, suitable for outdoor use with IP54 hermetic caps and closures. Ideal for ceiling installation, to be used with dedicated outdoor LED Strips.

Custom Finishing

MAX 12,3 mm

MAX 23 W/m

IP54

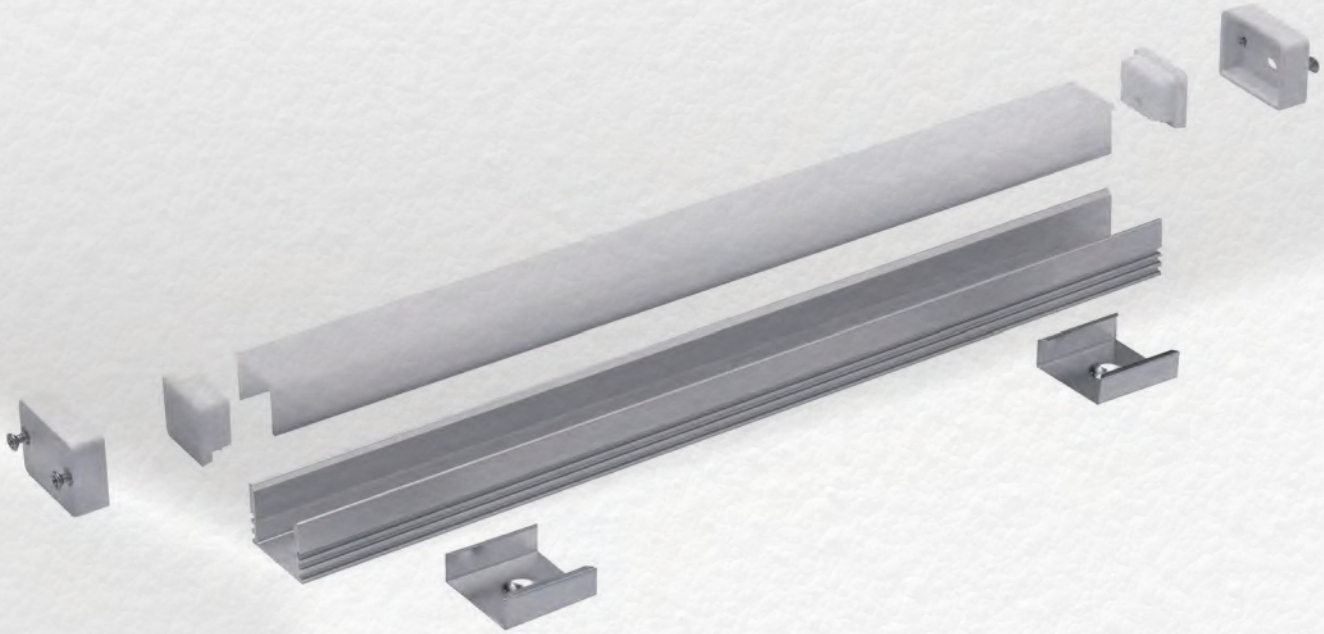

Total lenght	18,3 mm
Strip max clutter	12,3 mm
Height	13 mm
Profile type	Support
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF026/100
		PRF026/100W
2 m		PRF026/200
		PRF026/200W

ACCESSORIES

PRF026

COVERS		Opal Polycarbonate 1m	PRF026PX15
		Opal Polycarbonate 2m	PRF026PX05
CAPS		Plastic cap + Opposite cap in Grey plastic	PRF026TP01
		Plastic cap + Opposite cap in White plastic	PRF026TP02
BRACKETS		Metal bracket	PRF026ST01

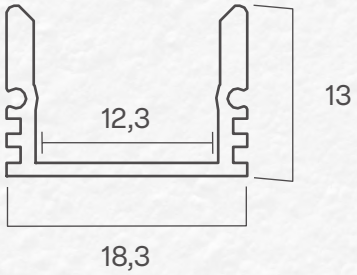

INSTALLATION

WALL - CEILING IP54



PRF030

Flexible anodized aluminum extrusion profile, with an ultra-thin rectangular section and a wide base. Ideal for installation on curved surfaces, to create shapes and plays of light that convey emotions.

Custom Finishing

Curvabile

MAX 13 mm

MAX 14.4 W/m

Total lenght	18 mm
Strip max clutter	13 mm
Height	4 mm
Profile type	Support
Applicable strip power	14.4 W/m
Bendable	Yes

Lenght	Finish	Code
1 m		PRF030/100
		PRF030/100W
2 m		PRF030/200
		PRF030/200W

ACCESSORIES

PRF030

COVERS		Opal Polycarbonate 1m	PRF030PX11
		Opal Polycarbonate 2m	PRF030PX01
		Transparent polycarbonate 1m	PRF030PX12
		Transparent polycarbonate 2m	PRF030PX02
CAPS		Grey plastic	PRF030TP01
		White plastic	PRF030TP02
BRACKETS		Metal bracket	PRF030ST01

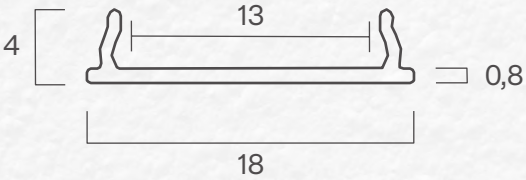

INSTALLATION

WALL - CEILING - FURNITURE

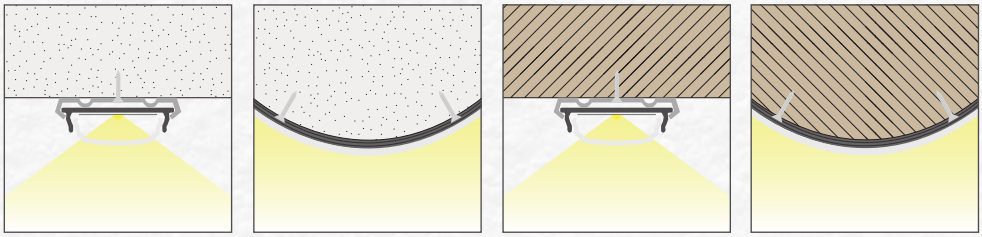

H-shaped extruded aluminum profile, ideal for creating thin lines of light. The accessories allow for recessed and ceiling installation. The lower part of the profile can be used to house power cables and, together with the available covers, allow the creation of different lighting effects based on design needs.

Custom Finishing

MAX 12 mm

MAX 14.4 W/m

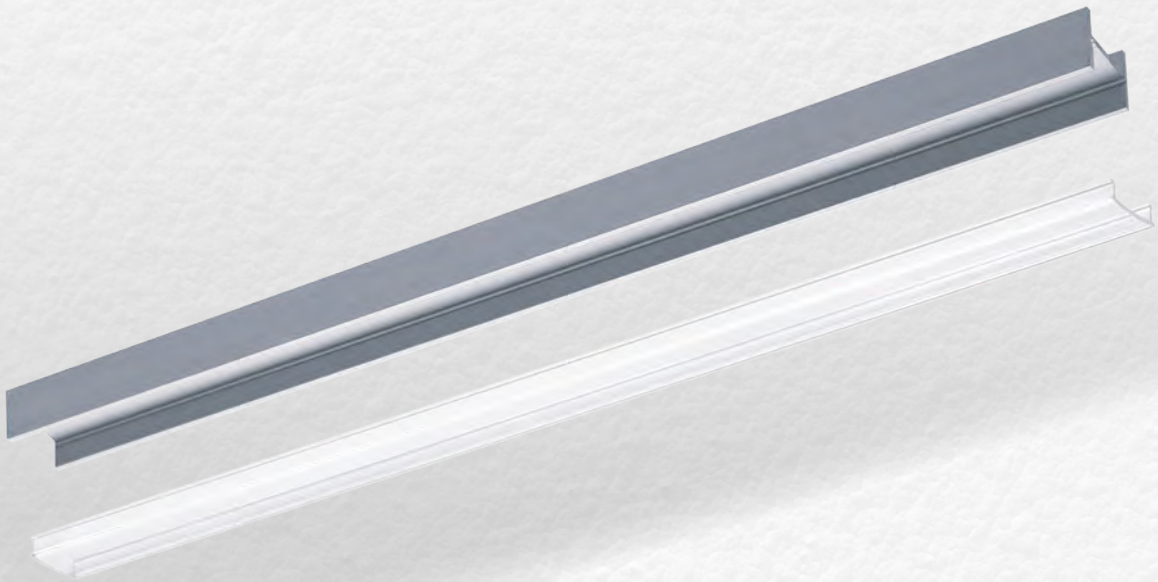

Total lenght	16 mm
Strip max clutter	12 mm
Height	12,5 mm
Profile type	Support / Recessed
Applicable strip power	14.4 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF031/100
2 m		PRF031/200
3 m		PRF031/300

COVERS		Opal Polycarbonate 1m	PRF003PX11
		Opal Polycarbonate 2m	PRF003PX01
		Opal Polycarbonate 3m	PRF003PX31
		Transparent polycarbonate 1m	PRF003PX12
		Transparent polycarbonate 2m	PRF003PX02
		Transparent polycarbonate 3m	PRF003PX32
CAPS		Grey plastic	PRF031TP01
BRACKETS		Metal bracket	PRF031ST01
		Plasterboard bracket	PRF031ST03

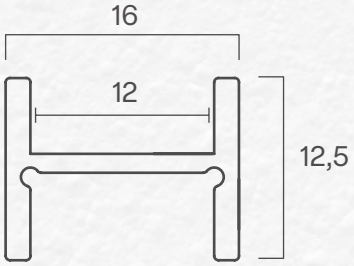

INSTALLATION

WALL - CEILING - RECESSED PLASTERBOARD

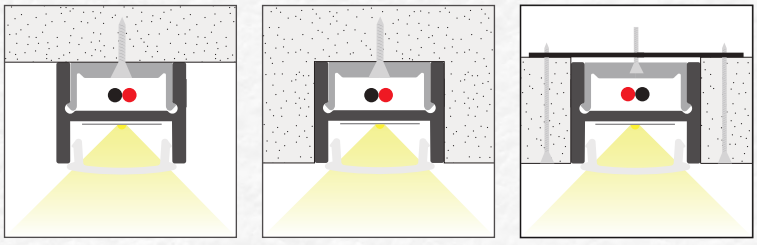

PRF032

Wide rectangular section anodized aluminum extruded profile. The important and wide design makes it highly dissipative and with a lot of exchange surface; it is possible to install up to 4 Led Strips at the same time. The accessories allow for wall mounting, recessed plasterboard with spring or suspension. The linear joints allow for the creation of continuous light lines.

Custom Finishing

MAX 64 mm

MAX 90 W/m

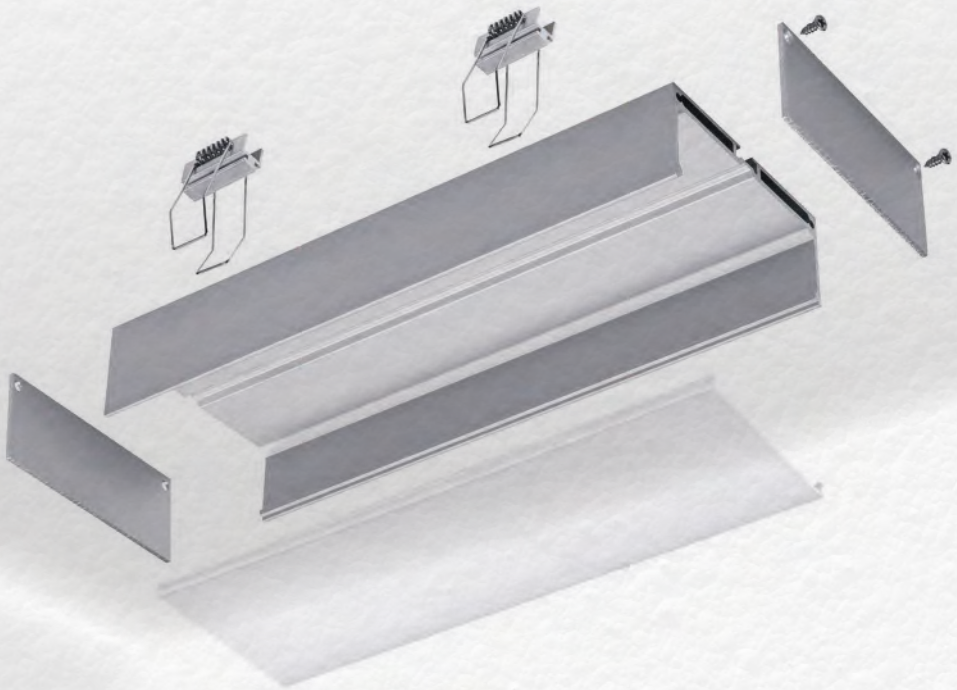

Total lenght	75 mm
Strip max clutter	64 mm
Height	32 mm
Profile type	Support
Applicable strip power	90 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF032/100G
		PRF032/100W
		PRF032/100B
2 m		PRF032/200G
		PRF032/200W
		PRF032/200B
3 m		PRF032/300G
		PRF032/300W
		PRF032/300B

ACCESSORIES

PRF032

COVERS		Opal Polycarbonate 1m	PRF032PX15
		Opal Polycarbonate 2m	PRF032PX05
		Opal Polycarbonate 3m	PRF032PX35
CAPS		Grey plastic	PRF032TP01
		White plastic	PRF032TP02
		Black plastic	PRF032TP03
BRACKETS		Suspension kit with terminals cavo 1,5m	SSP002
		Metal spring bracket for recessed profiles	PRF020ST01
		Joint linear bracket	SSG002C
		X/XL Joint Bracket Set	SSG002CX
		T Joint Bracket Set	SSG002CT
		L/L Joint Bracket Set	SSG002CL
		L flat Joint Bracket Set	SSG002CP

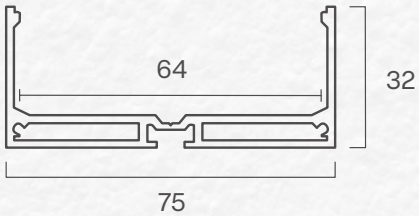

INSTALLATION

CEILING - SUSPENSION - RECESSED

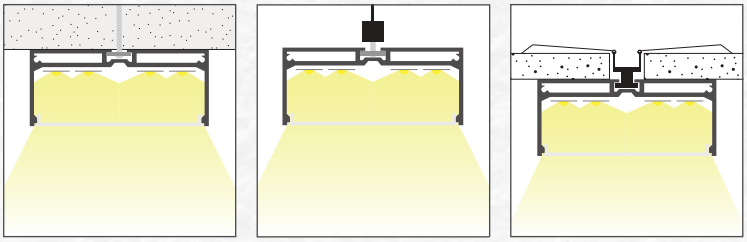

PRF034

Anodized aluminum extruded profile made with a double overlapping housing for the application of two LED strips with double light emission. It is designed for wall installation, allowing the creation of lamps with reduced dimensions and excellent light output. Ideal for lighting landings, common areas and passageways. The fixing bracket makes installation quick and easy.

Custom Finishing

MAX 12 mm

MAX 19.2 W/m

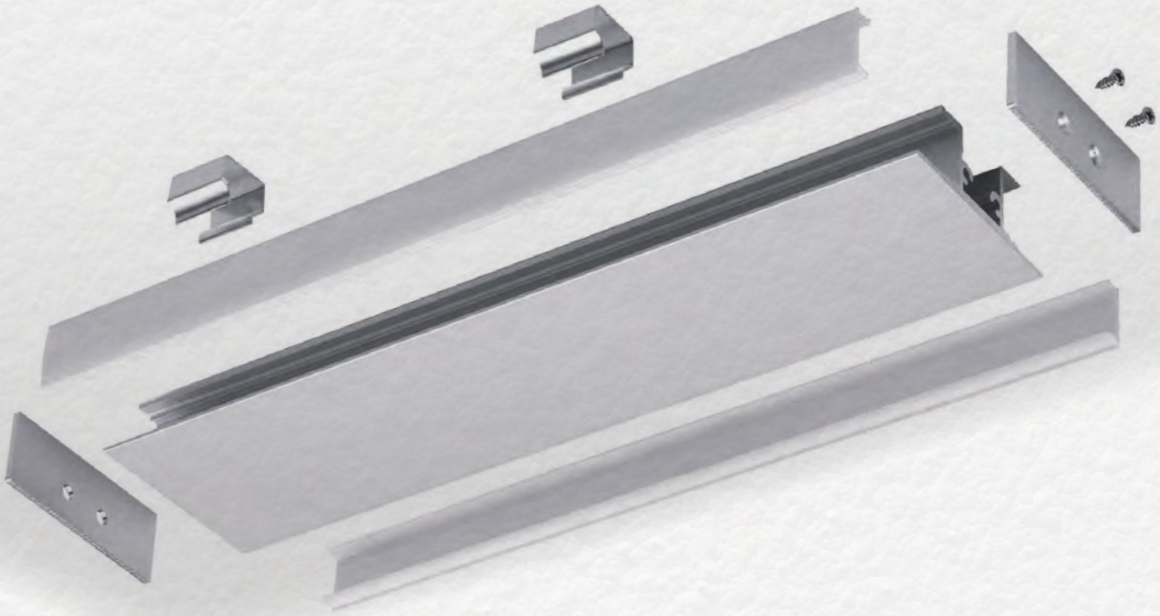

Total lenght	18 mm
Strip max clutter	12 mm
Height	48,5 mm
Profile type	Support
Applicable strip power	19.2 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF034/100G
		PRF034/100W
		PRF034/100B
2 m		PRF034/200G
		PRF034/200W
		PRF034/200B
3 m		PRF034/300G
		PRF034/300W
		PRF034/300B

ACCESSORIES

PRF034

COVERS		Opal Polycarbonate 1m	PRF034PX11
		Opal Polycarbonate 2m	PRF034PX01
		Opal Polycarbonate 3m	PRF034PX31
		Transparent polycarbonate 1m	PRF034PX12
		Transparent polycarbonate 2m	PRF034PX02
CAPS		Grey metal	PRF034TP01
		White metal	PRF034TP02
		Black metal	PRF034TP04
BRACKETS		Metal bracket	PRF034ST01

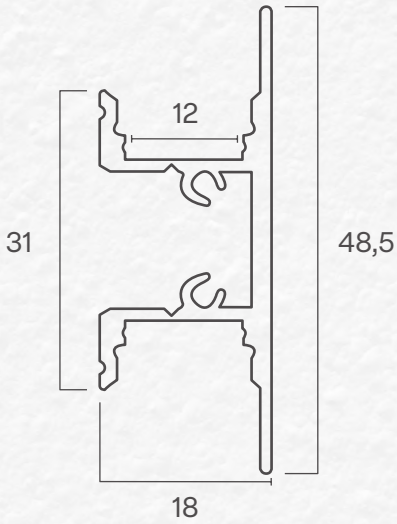

INSTALLATION

WALL



PRF037

Slim rectangular section anodized extruded aluminum profile. The small size makes it ideal for recessed installation in the grooves of shelves, under wall units, furniture and shelving. The fixing bracket makes the application quick and easy. To complete the installation, we recommend using our ER1059 StripLed with a maximum size of 5mm and a luminous flux of 1700lm/m for homogeneous and bright lighting.

Custom Finishing

MAX 6 mm

MAX 9.6 W/m

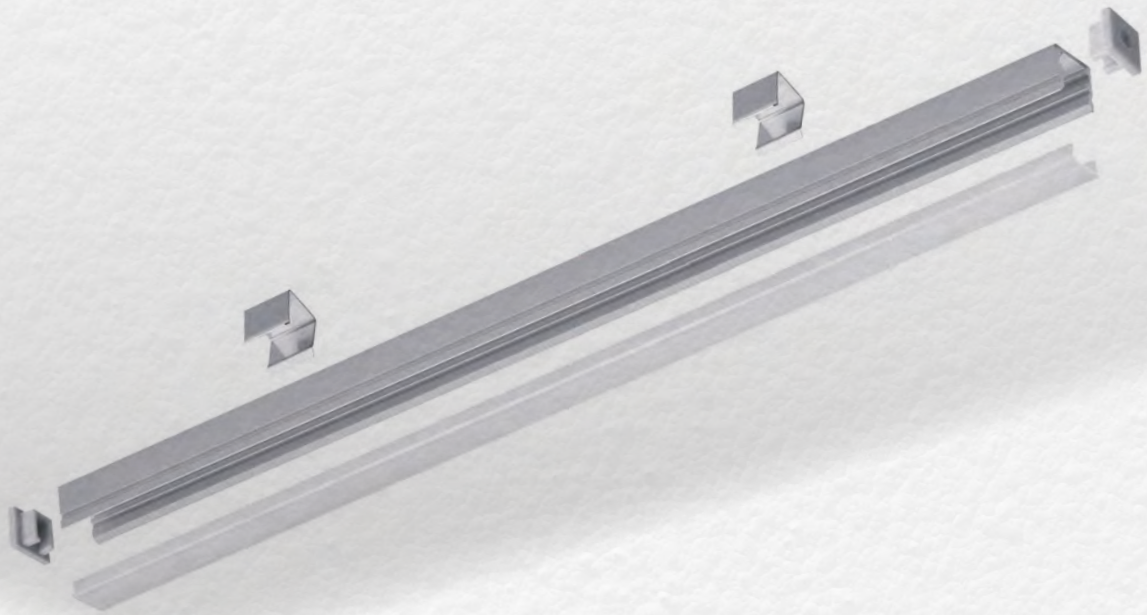

Total lenght	10 mm
Strip max clutter	6 mm
Height	9 mm
Profile type	Support
Applicable strip power	9.6 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF037/100
		PRF037/100W
		PRF037/100B
2 m		PRF037/200
		PRF037/200W
		PRF037/200B
3 m		PRF037/300
		PRF037/300W
		PRF037/300B

ACCESSORIES

PRF037

COVERS		Opal Polycarbonate 1m	PRF037PX11
		Opal Polycarbonate 2m	PRF037PX02
		Opal Polycarbonate 3m	PRF037PX31
CAPS		Grey plastic	PRF037TP01
		White plastic	PRF037TP02
		Black plastic	PRF034TP04
BRACKETS		Metal bracket	PRF037ST01



INSTALLATION

WALL - CEILING - BUILT-IN FURNITURE





PRF038

Anodized extruded aluminum profile with flanges for indoor installation recessed into the floor. Designed to be installed on the ground, the product is completely walkable, cemented into the body of the floor. The white polycarbonate diffuser makes the propagation of light homogeneous.

Custom Finishing

MAX 12 mm

MAX 23 W/m

IP54

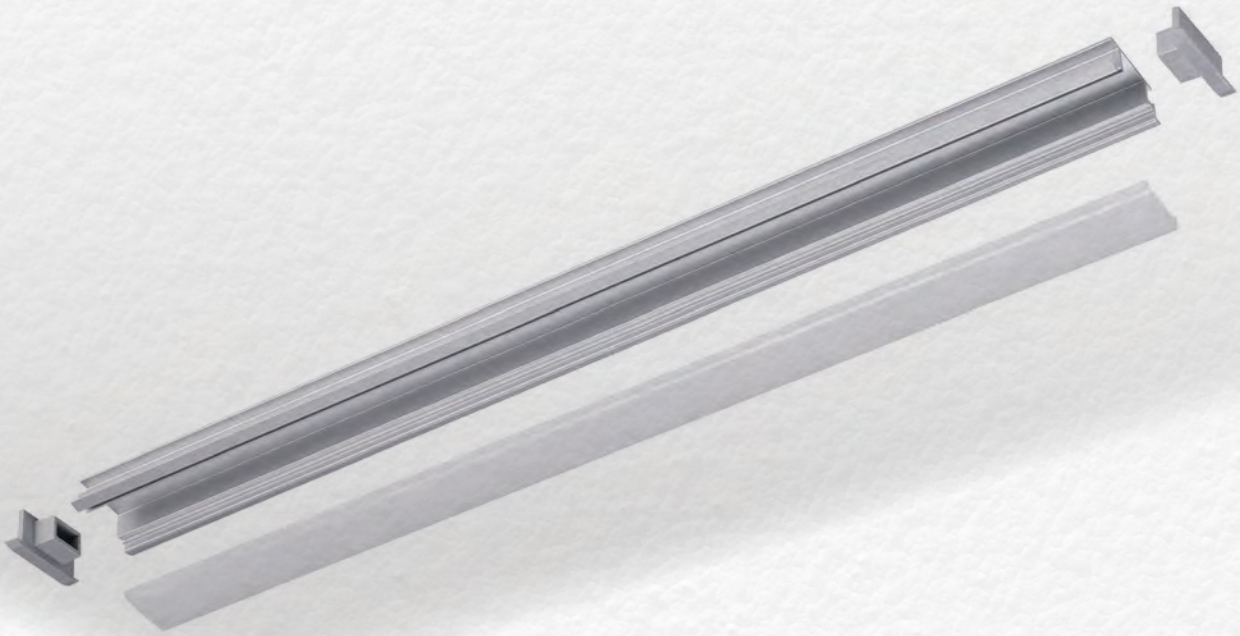

Total lenght	27,1 mm
Strip max clutter	12 mm
Height	11 mm
Profile type	Recessed
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF038/100
2 m		PRF038/200
3 m		PRF038/300

ACCESSORIES

PRF038

COVERS		Opal Polycarbonate 1m	PRF038PX15
		Opal Polycarbonate 2m	PRF038PX05
		Opal Polycarbonate 3m	PRF038PX35
CAPS		Grey plastic	PRF038TP01

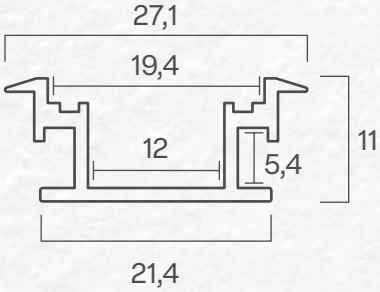

INSTALLATION

RECESSED WALKABLE



PRF040

Rectangular section anodized extruded aluminum profile, ideal for creating continuous lines of light. Can be installed on the ceiling, suspended or recessed, with internal compartment for housing the power driver. The size of the profile allows the installation of a double LED Strip.

Custom Finishing

MAX 32 mm

MAX 23 W/m

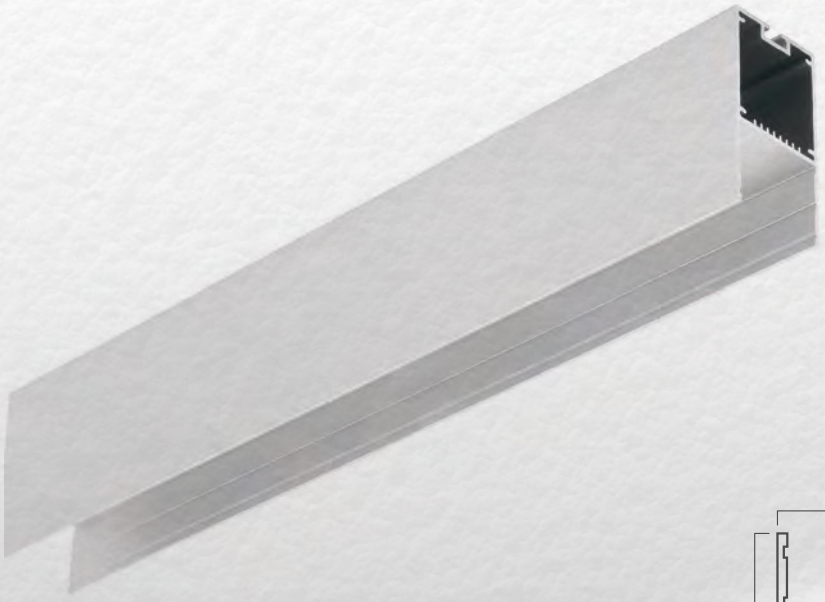

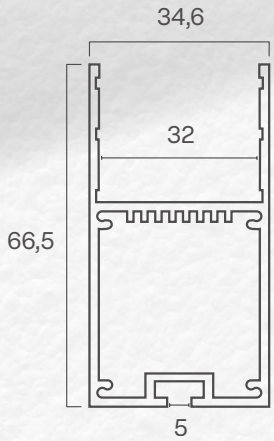

Total lenght	34,6 mm
Strip max clutter	32 mm
Height	66.5 mm
Profile type	Linear
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
1.5 m		PRF040/150G
		PRF040/150W
		PRF040/150B
2 m		PRF040/200G
		PRF040/200W
		PRF040/200B
3 m		PRF040/300G
		PRF040/300W
		PRF040/300B

ACCESSORIES

PRF040

COVERS



Opal Polycarbonate 1,5m	PRF010PX21
Opal Polycarbonate 2m	PRF010PX01
Opal Polycarbonate 3m	PRF010PX31

Silicon opal cover 20 m	PRF010PXV1

CAPS

Grey plastic	PRF040TP01
White plastic	PRF040TP02
Black plastic	PRF040TP04

BRACKETS

Suspension kit with terminals cavo 1,5m	SSP002

Ceiling bracket	PRF040ST03



Joint linear bracket	SSG001C

L/L Joint Bracket Set	SSG001CL

L flat Joint Bracket Set	SSG001CP

INSTALLATION

CEILING - SUSPENSION





PRF042

Anodized aluminum extruded profile with bi-emission H, designed to house two opposite LED strips and create a double light emission from below and above. Ideal for suspended installation and to create continuous light lines.

Custom Finishing

MAX 12 mm

MAX 19.2 W/m

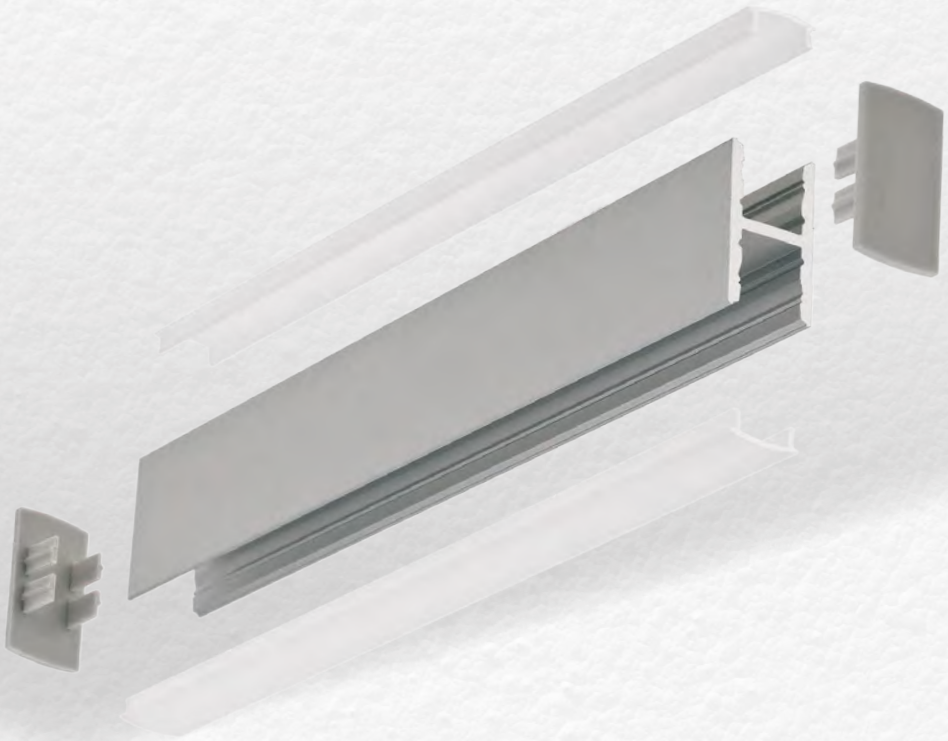

Total lenght	17,4 mm
Strip max clutter	12 mm
Height	31,4 mm
Profile type	Linear
Applicable strip power	19.2 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF042/100
		PRF042/100W
		PRF042/100B
2 m		PRF042/200
		PRF042/200W
		PRF042/200B
3 m		PRF042/300
		PRF042/300W
		PRF042/300B

ACCESSORIES

PRF042

COVERS		Opal Polycarbonate 1m	PRF003PX11
		Opal Polycarbonate 2m	PRF003PX01
		Opal Polycarbonate 3m	PRF003PX31
CAPS		Grey plastic	PRF042TP01
		White plastic	PRF042TP02
		Black plastic	PRF042TP04
BRACKETS		Suspension kit with terminals cavo 1,5m	SSP006

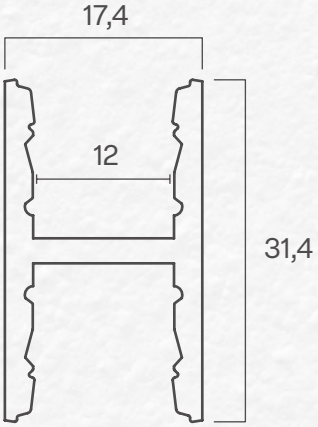

INSTALLATION

SUSPENSION



PRF045

Slim U-shaped anodized aluminum extruded profile. The small size makes it ideal for recessed or surface-mounted installation to create lines of light under cabinets, furniture, display cases and wherever accent and definition lighting is needed. The fixing bracket makes application quick and easy. To complete the installation, we recommend using our ER1061 StripLed with a maximum size of 5mm and a luminous flux of 1700lm/m for uniform and bright lighting.

Custom Finishing

MAX 5 mm

MAX 14.4 W/m

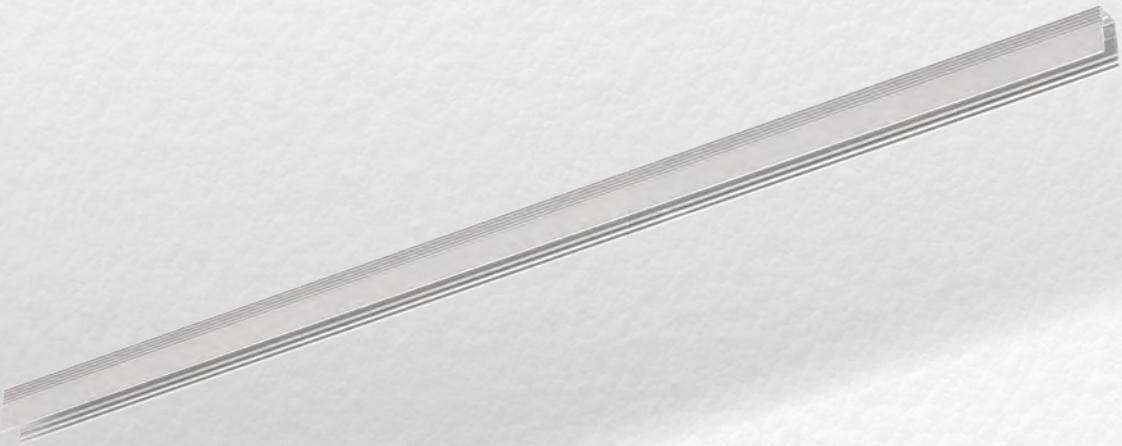

Total lenght	7,8 mm
Strip max clutter	5 mm
Height	12 mm
Profile type	Support
Applicable strip power	14.4 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF045/100
		PRF045/100W
		PRF045/100B
2 m		PRF045/200
		PRF045/200W
		PRF045/200B
3 m		PRF045/300
		PRF045/300W
		PRF045/300B

ACCESSORIES

PRF045

COVERS		Opal Polycarbonate 1m	PRF045PX11
		Opal Polycarbonate 2m	PRF045PX01
		Opal Polycarbonate 3m	PRF045PX31
CAPS		Grey plastic	PRF045TP01
		White plastic	PRF045TP02
		Black plastic	PRF045TP04
BRACKETS		Metal bracket	PRF045ST01

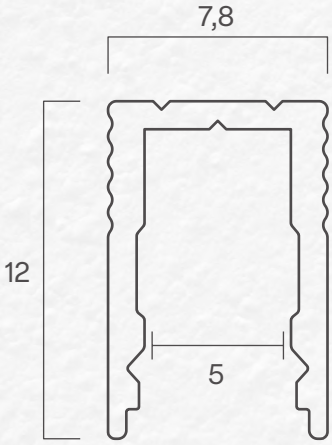

INSTALLATION

WALL - CEILING - BUILT-IN FURNITURE

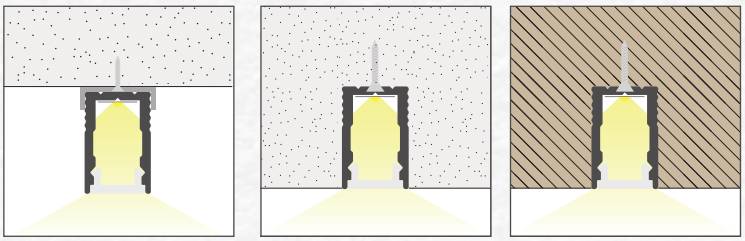

PRF046

Slim recessed anodized aluminum extruded profile with flanges. The small size makes it ideal for recessed installation to create lines of light under cabinets, furniture, display cases and where accent and definition light is needed. The fixing bracket makes application quick and easy. To complete the installation we recommend using our ER1061 StripLed with a maximum size of 5mm and a luminous flux of 1700lm/m for uniform and bright lighting.

Custom Finishing

MAX 5 mm

MAX 14.4 W/m

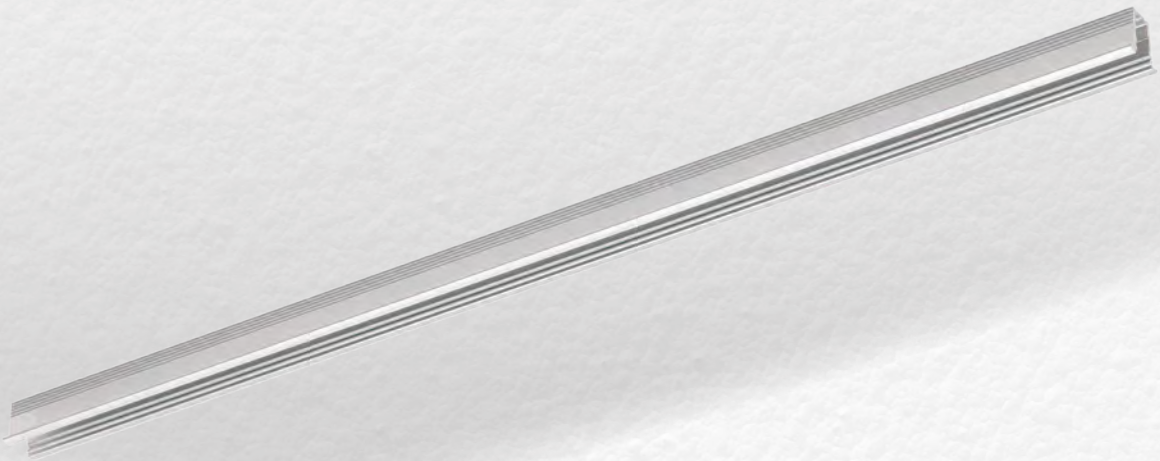

Total lenght	12 mm
Strip max clutter	5 mm
Height	12 mm
Profile type	Recessed
Applicable strip power	14.4 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF046/100
		PRF046/100W
2 m		PRF046/200
		PRF046/200W
3 m		PRF046/300
		PRF046/300W

ACCESSORIES

PRF046

COVERS		Opal Polycarbonate 1m	PRF045PX11
		Opal Polycarbonate 2m	PRF045PX01
		Opal Polycarbonate 3m	PRF045PX31
CAPS		Grey plastic	PRF046TP01
		White plastic	PRF046TP02
		Black plastic	PRF046TP04

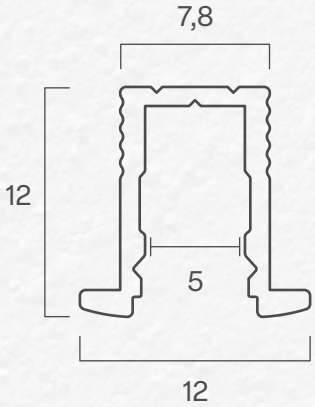

INSTALLATION

RECESSED



PRF049

Rectangular section anodized extruded aluminum profile, ideal for creating continuous lines of light. Can be installed suspended or ceiling mounted, with internal compartment for housing the power driver. The strip can be installed on a special internal shaped element that can be applied and removed from the body of the profile, separately, without having to remove the entire profile from its location, making installation and maintenance of the lamp easier.

Custom Finishing

MAX 15 mm

MAX 23 W/m

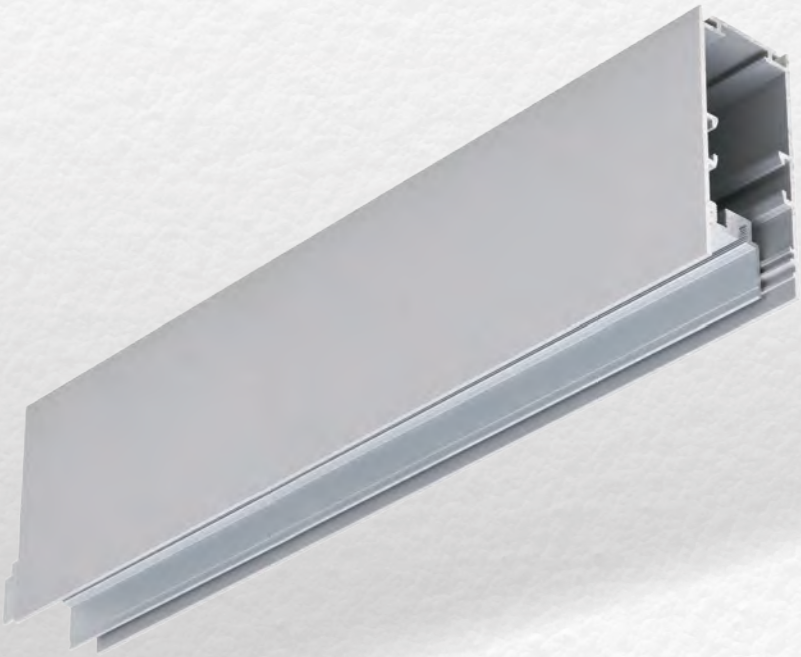

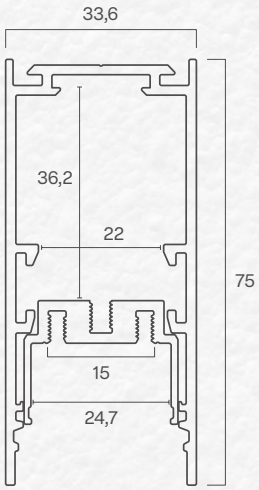

Total lenght	33,6 mm
Strip max clutter	15 mm
Height	75 mm
Profile type	Linear
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2.5 m		PRF049/250G
		PRF049/250W
		PRF049/250B

ACCESSORIES

PRF049

COVERS		Opal Polycarbonate 2,5m	PRF049PX23
CAPS		Grey aluminum closing	PRF049TP01
		White aluminum closing	PRF049TP02
		Black aluminum closing	PRF049TP04
BRACKETS		Ceiling bracket	PRF040ST03
		Cable terminal suspension kit 1,5m	SSP007
		Cable security kit 30cm	SSP010
		Joint linear bracket	SSG004C
		L flat Joint Bracket Set	SSG004CP
		L/L Joint Bracket Set	SSG004CL

INSTALLATION

CEILING - SUSPENSION





PRF050

Rectangular section anodized extruded aluminum profile. Its large dimensions make it highly dissipative, ideal for creating continuous lines of light. Can be installed suspended or ceiling-mounted, with internal compartment for housing the power driver. The strip can be installed on a special internal shaped element that can be applied and removed from the body of the profile, separately, without having to remove the entire profile from its location, making installation and maintenance of the lamp easier. The prismatic diffuser reduces light glare.

Custom Finishing

MAX 18 mm

MAX 23 W/m

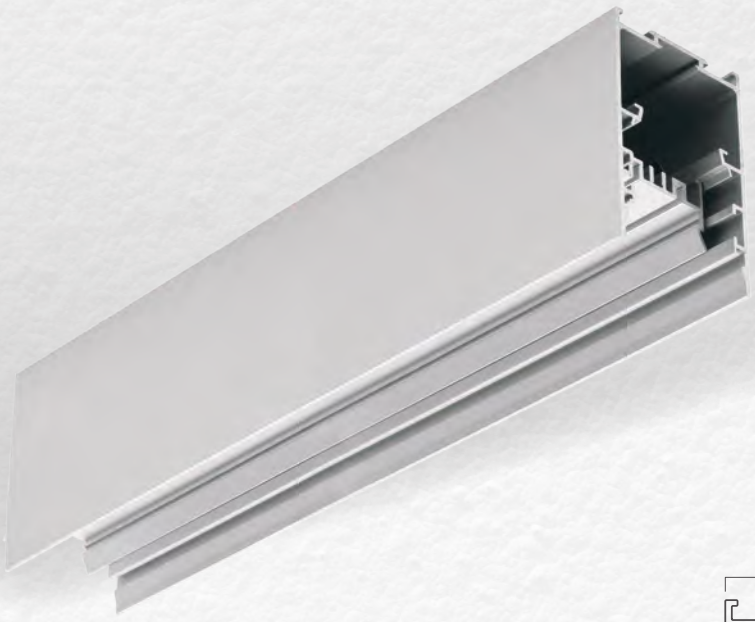

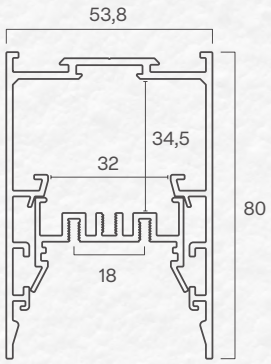

Total lenght	53,8 mm
Strip max clutter	18 mm
Height	80 mm
Profile type	Linear
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2.5 m		PRF050/250W
		PRF050/250B

ACCESSORIES

PRF050

COVERS		Satin 2,5m	PRF050PX23
CAPS		White metal	PRF050TP02
		Black metal	PRF050TP04
BRACKETS		Metal bracket	PRF050ST01
		Cable terminal suspension kit 1,5m	SSP007
		Cable security kit 30cm	SSP010
		Joint linear bracket	SSG004C
		L flat Joint Bracket Set	SSG004CP
		L/L Joint Bracket Set	SSG004CL

INSTALLATION

CEILING - SUSPENSION





PRF054

Rectangular section anodized extruded aluminum profile. Its large dimensions make it highly dissipative, ideal for creating continuous lines of light. Can be installed suspended or ceiling-mounted, with internal compartment for housing the power driver. The strip can be installed on a special internal shaped element that can be applied and removed from the body of the profile, separately, without having to remove the entire profile from its location, making installation and maintenance of the lamp easier. The prismatic diffuser reduces light glare.

Custom Finishing

MAX 13 mm

MAX 23 W/m

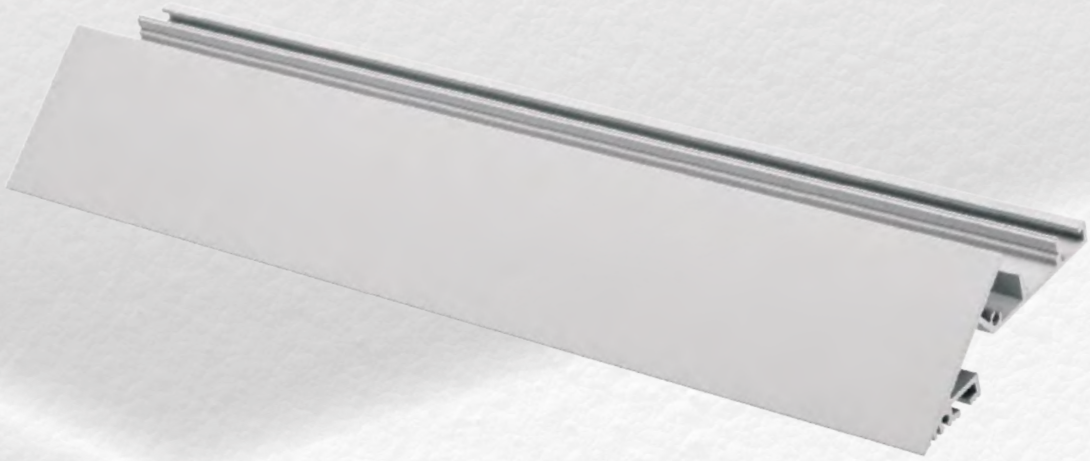

Total lenght	73,2 mm
Strip max clutter	13 mm
Height	30,2 mm
Profile type	Support
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF054/200
		PRF054/200W

ACCESSORIES

PRF054

COVERS		Opal Polycarbonate 2m	PRF054PX01
CAPS		Grey plastic	PRF054TP01
		White plastic	PRF054TP02

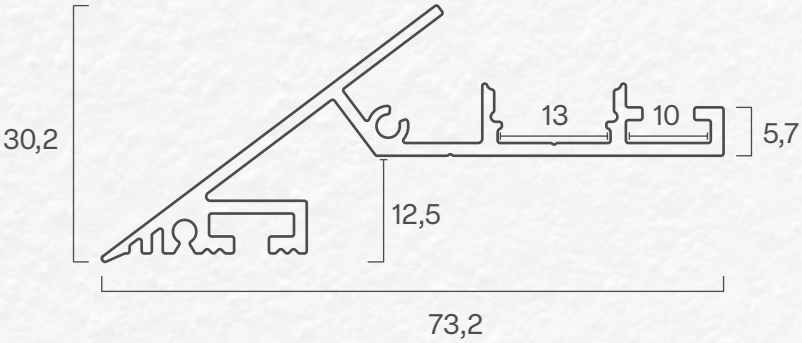

INSTALLATION

CURTAIN



PRF057

Profile in extruded anodized aluminum ultraslim. The minimal dimensions make it ideal for recessed or support installation, for the creation of lines of light under cabinets, furniture, display cases and where an accent and definition light is needed. The fixing bracket makes the application simple and fast. To complete the installation we recommend using our StripLed ER1061 with a maximum size of 5mm and a luminous flux of 1700lm/m for a homogeneous and bright lighting.

MAX
5 mm

MAX
14.4 W/m

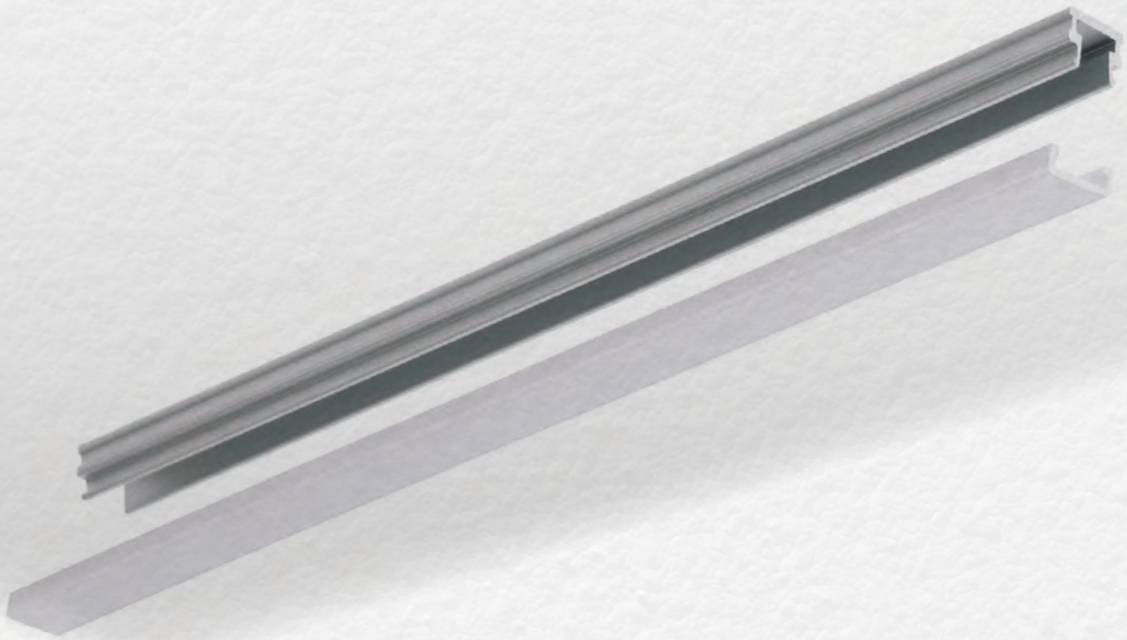

Total lenght	8 mm
Strip max clutter	5 mm
Height	6,5 mm
Profile type	Support
Applicable strip power	14.4 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF057/200

ACCESSORIES

PRF057

COVERS		Opal Polycarbonate 2m	PRF057PX01
CAPS		Grey plastic	PRF057TP01
BRACKETS		Metal bracket	PRF057ST01

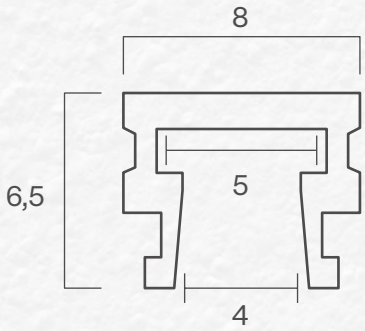

INSTALLATION

WALL - CEILING - RECESSED





PRF059

Profile in extruded anodized aluminum ultraslim. The minimal dimensions make it ideal for recessed or support installation, for the creation of lines of light under cabinets, furniture, display cases and where an accent and definition light is needed. The fixing bracket makes the application simple and fast. To complete the installation we recommend using our StripLed ER1061 with a maximum size of 5mm and a luminous flux of 1700lm/m for a homogeneous and bright lighting.

MAX **19 mm**

MAX **23 W/m**

Total lenght	45,7 mm
Strip max clutter	19 mm
Height	50 mm
Profile type	Recessed
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF059/200
3 m		PRF059/300

ACCESSORIES

PRF059

COVERS		Opal Polycarbonate 2m	PRF059PX01
		Opal Polycarbonate 3m	PRF059PX03
CAPS		Grey metal	PRF059TP01

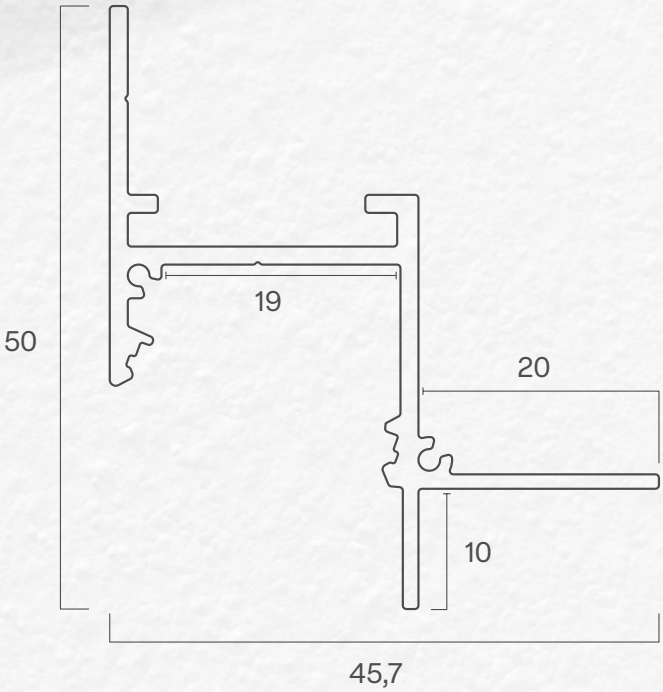

INSTALLATION

WALL - CEILING PLASTERBOARD



PRF060

Large extruded aluminum profile, for the creation of linear lamps with ceiling or suspension installation. To facilitate assembly and maintenance, the profile is composed of two separate parts, an external one for fixing and an internal extractable one, in which the strips and the driver housed inside are installed. The greater width allows for the installation of more parallel strips inside it, thus obtaining a light of great intensity and uniformity, ideal for illuminating offices and commercial spaces.

Custom Finishing

MAX 46 mm

MAX 90 W/m

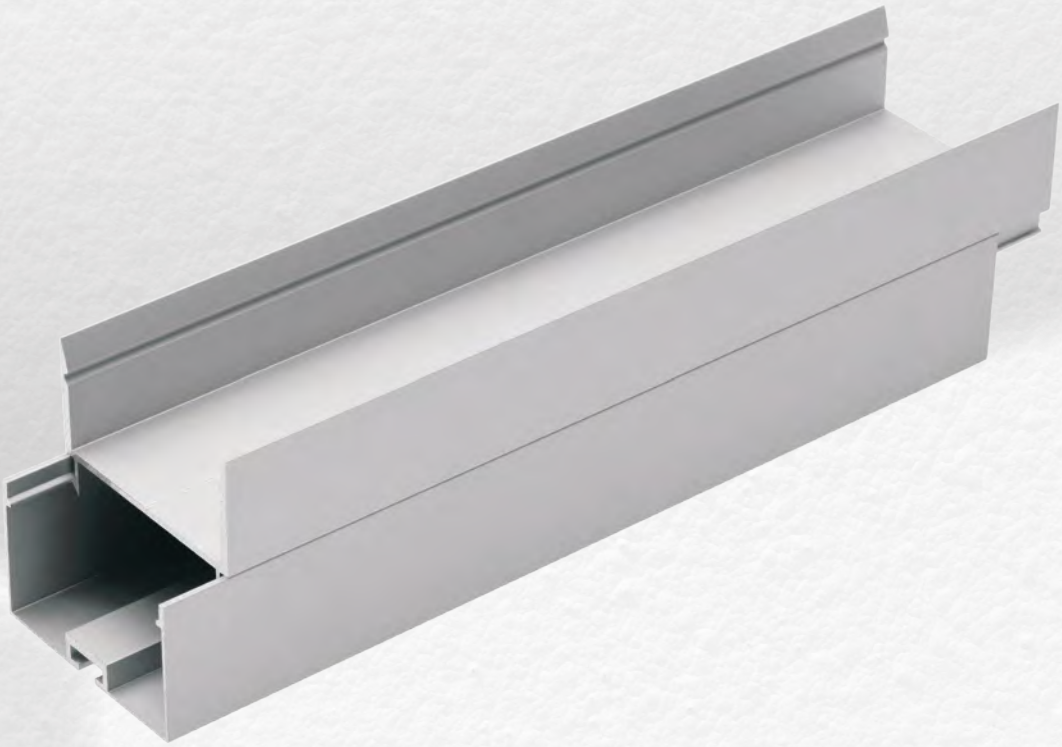

Total lenght	50 mm
Strip max clutter	46 mm
Height	55 mm
Profile type	Linear
Applicable strip power	90 W/m
Bendable	No

Lenght	Finish	Code
2.5 m		PRF060/250
		PRF060/250W

ACCESSORIES

PRF060

COVERS		Prismatic URG<19	PRF060PX19
CAPS		Grey metal	PRF060TP01
		White metal	PRF060TP02
BRACKETS		Suspension kit	SSP008

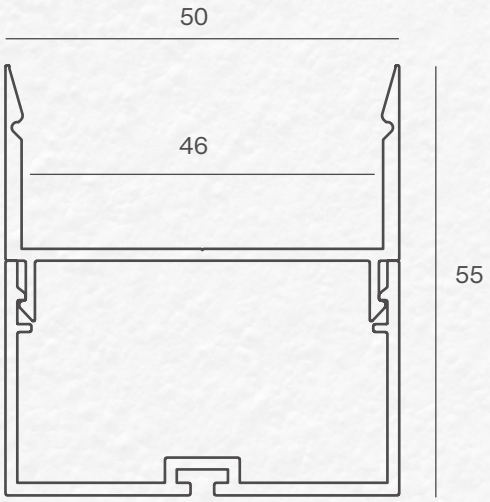

INSTALLATION

CEILING - SUSPENSION

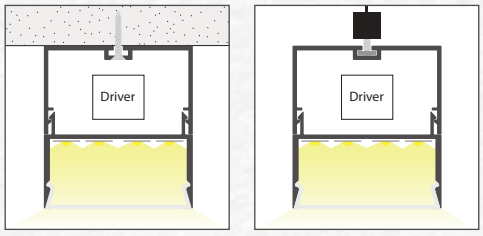

PRF061

Anodized extruded aluminum profile for ceiling installation with recessed opal polycarbonate screen. Ideal for creating more comfortable lighting with continuous and uniform lines of light of great effect.

Custom Finishing

MAX 13 mm

MAX 23 W/m

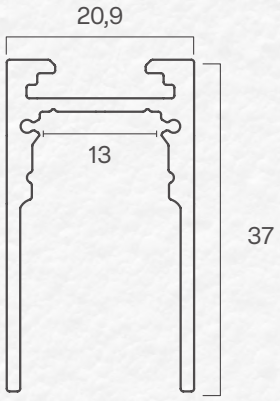

Total lenght	20,9 mm
Strip max clutter	13 mm
Height	37 mm
Profile type	Linear
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF061/200G
		PRF061/200W
		PRF061/200B

ACCESSORIES

PRF061

COVERS		Opal Polycarbonate 2m	PRF061PX01
CAPS		Grey metal	PRF061TP01
		White metal	PRF061TP02
		Black metal	PRF061TP04
BRACKETS		Metal bracket	PRF061ST02
		Suspension terminals kit 1,5m	SSP013
		Joint linear bracket	SSG006C
		L flat Joint Bracket Set	SSG006CP
		L/L Joint Bracket Set	SSG006CL

INSTALLATION

CEILING - SUSPENSION





PRF065

Angular anodized extruded aluminum profile for surface-mounted installation, with concealed fixing brackets and internal cable passage compartment. Ideal for installation on furniture and structures where light diffusion is required at a 45° angle to the fixing plane.

MAX **12 mm**

MAX **23 W/m**

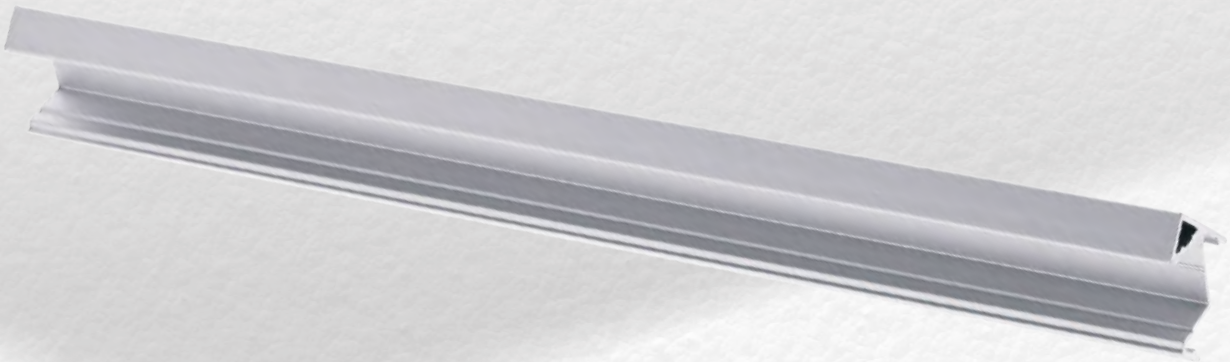

Total lenght	18,5 mm
Strip max clutter	12 mm
Height	18,6 mm
Profile type	Angle
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF065/200
		PRF065/200W
3 m		PRF065/300
		PRF065/300W

ACCESSORIES

PRF065

COVERS		Opal Polycarbonate 2m	PRF065PX01
		Opal Polycarbonate 3m	PRF065PX31
CAPS		Grey metal	PRF065TP01
		White metal	PRF065TP02
BRACKETS		Metal bracket	PRF065ST02

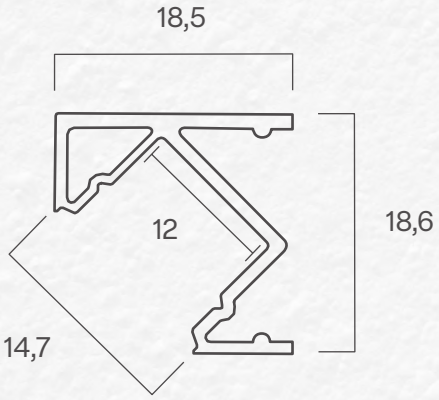

INSTALLATION

WALL - CEILING



PRF068

Anodized aluminum extruded profile flush with plasterboard with external corner. It integrates perfectly into false ceilings. The installation of the internal recessed Led Strip is ideal for creating uniform and diffused 45° lighting of corridors or walls.

MAX
4 mm

MAX
12 W/m

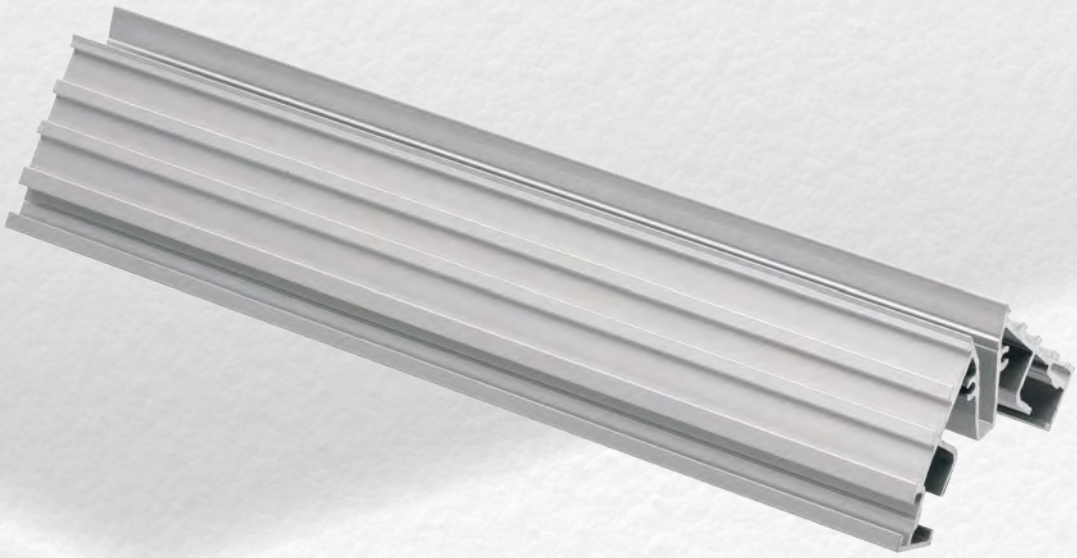

Total lenght	47 mm
Strip max clutter	4 mm
Height	47 mm
Profile type	Angle
Applicable strip power	12 W/m
Bendable	No

Lenght	Finish	Code
3 m		PRF068/300

ACCESSORIES

PRF068

COVERS		Opal Polycarbonate 3m	PRF068PX33
CAPS		Plastic	PRF068TP02
BRACKETS		Joint linear bracket	SSG002C
		L/L Joint Bracket Set	SSG002CL
		L flat Joint Bracket Set	SSG002CP

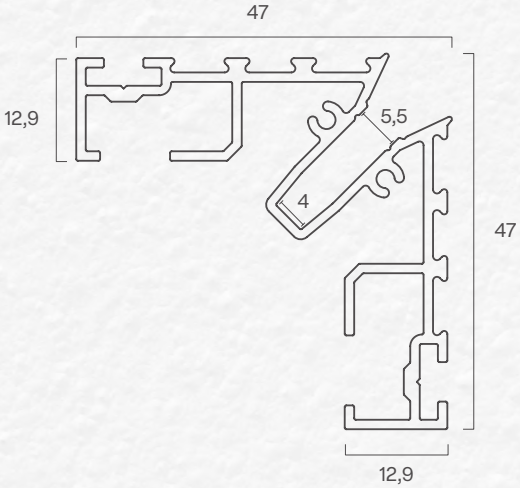

INSTALLATION

WALL - CEILING PLASTERBOARD



Anodized aluminum extruded profile flush with plasterboard with internal corner. It integrates perfectly into false ceilings. The installation of the internal recessed Led Strip is ideal for creating uniform and diffused 45° lighting of corridors or walls.

MAX
4 mm

MAX
12 W/m

Total lenght	44,8 mm
Strip max clutter	4 mm
Height	44,8 mm
Profile type	Angle
Applicable strip power	12 W/m
Bendable	No

Lenght	Finish	Code
3 m		PRF069/300

ACCESSORIES

PRF069

COVERS		Opal Polycarbonate 3m	PRF069PX33
CAPS		White plastic	PRF069TP02
BRACKETS		Joint linear bracket	SSG002C
		L/L Joint Bracket Set	SSG002CL
		L flat Joint Bracket Set	SSG002CP

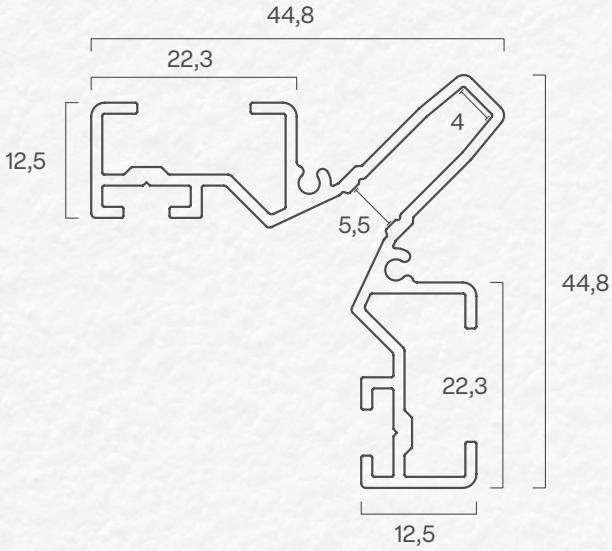

INSTALLATION

WALL - CEILING PLASTERBOARD



ANCIENT ART
NEW YORK
1000 WINES
ALGEBRA
1000 WINES
ALGEBRA
ALGEBRA
PHOTOGRAPHY

1000 MARS
VIVRE AVEC
VIRGINIA
MOSAIQUE

Anodized aluminum extruded profile with external corner for bricks. It integrates perfectly into false ceilings. The installation of the internal recessed Led Strip is ideal for creating uniform and diffused 45° lighting of corridors or walls.

MAX
5 mm

MAX
12 W/m

Total lenght	35 mm
Strip max clutter	5 mm
Height	35 mm
Profile type	Angle
Applicable strip power	12 W/m
Bendable	No

Lenght	Finish	Code
3 m		PRF070/300

ACCESSORIES

PRF070

COVERS		Opal Polycarbonate 3m	PRF070PX33
CAPS		White plastic	PRF070TP02
BRACKETS		Joint linear bracket	SSG005C
		L/L Joint Bracket Set	SSG005CL
		L flat Joint Bracket Set	SSG005CP

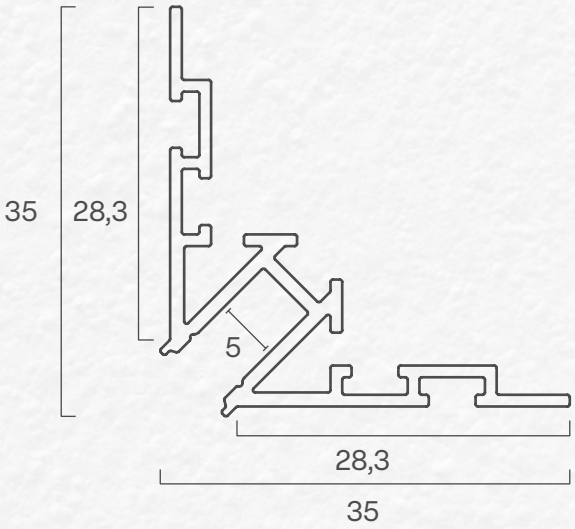

INSTALLATION

WALL - BRICK CEILINGS



PRF071

Angular anodized aluminum extrusion profile with Vela effect; wall installation with indirect light emission. Ideal for creating linear wall lights with uniform lighting that creates continuous lines of light.

Custom Finishing

MAX 12 mm

MAX 23 W/m

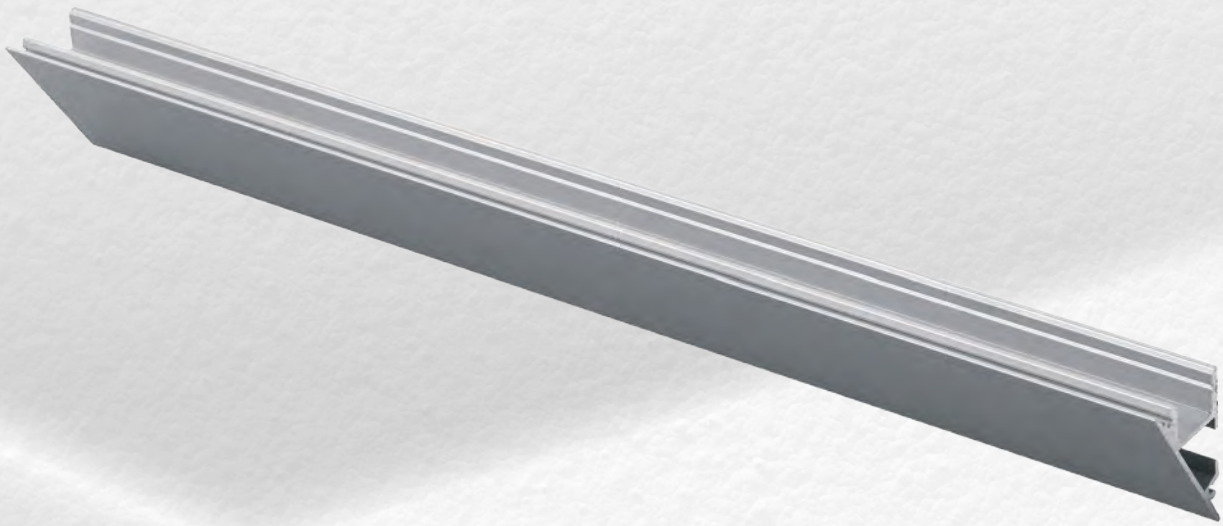

Total lenght	23 mm
Strip max clutter	12 mm
Height	37,4 mm
Profile type	Support
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
3 m		PRF071/300G
		PRF071/300W
		PRF071/300B

ACCESSORIES

PRF071

COVERS		Opal Polycarbonate 3m	PRF071PX31
CAPS		Grey aluminum	PRF071TP01
		White aluminum	PRF071TP02
		Black aluminum	PRF071TP04
BRACKETS		Metal bracket	PRF071ST01

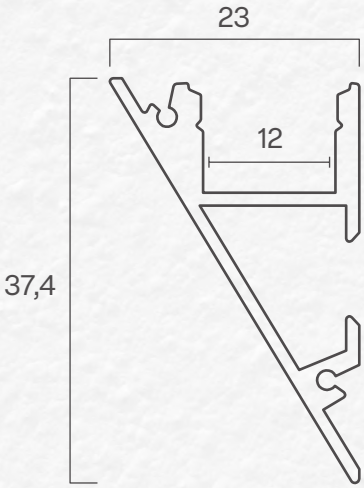

INSTALLATION

WALL



Anodized extruded aluminum profile for plasterboard. Installation recessed ceiling and wall totally disappearing, with fixing fins placed at the base to facilitate installation and smoothing. Ideal for creating continuous lines of light perfectly integrated into the walls.

MAX
12 mm

MAX
23 W/m

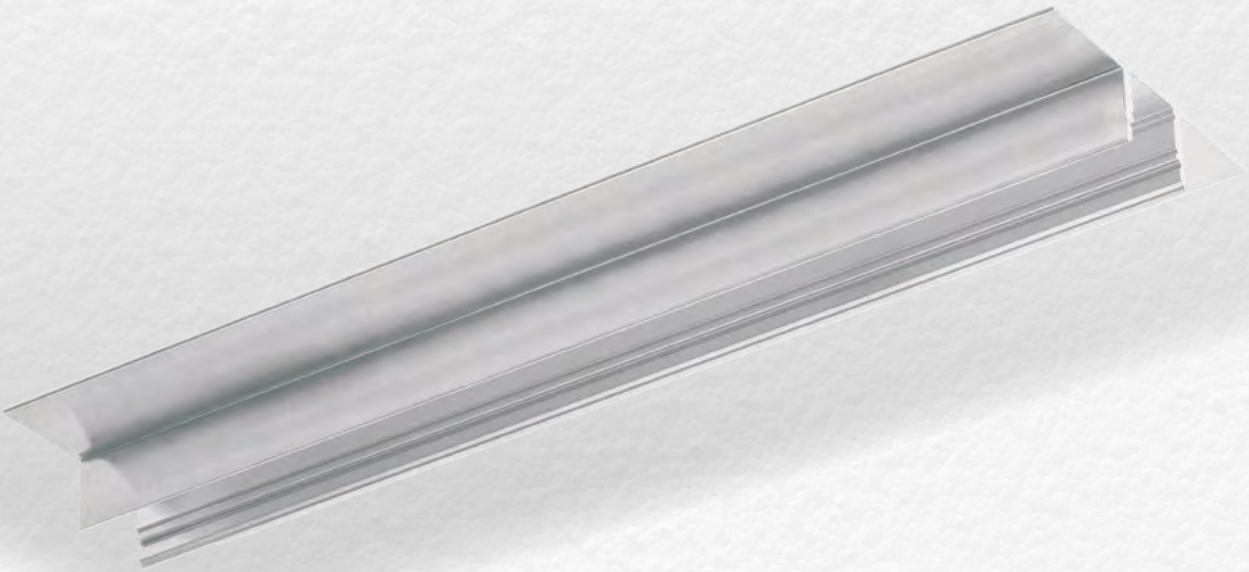

Total lenght	56,9 mm
Strip max clutter	12 mm
Height	14,6 mm
Profile type	Recessed
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF073/200

ACCESSORIES

PRF073

COVERS		Opal Polycarbonate 2m	PRF073PX01
		Silicon opal cover 30m	PRF073PXT1
CAPS		Grey plastic	PRF073TP01

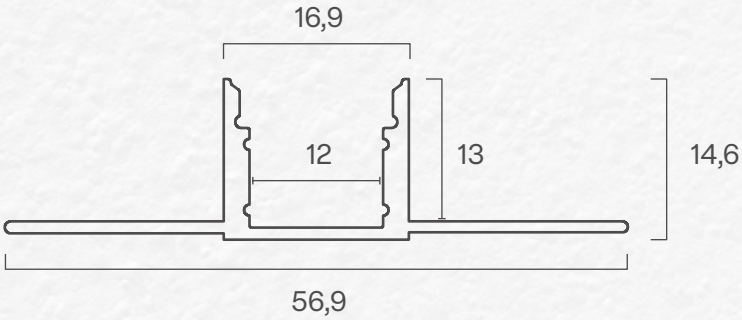

INSTALLATION

WALL - CEILING PLASTERBOARD



Wide anodized aluminum extruded profile for plasterboard. Recessed ceiling and wall installation, completely disappearing, with fixing fins placed at the base to facilitate installation and smoothing. Ideal for creating continuous lines of light perfectly integrated into the walls.

MAX
21 mm

MAX
23 W/m

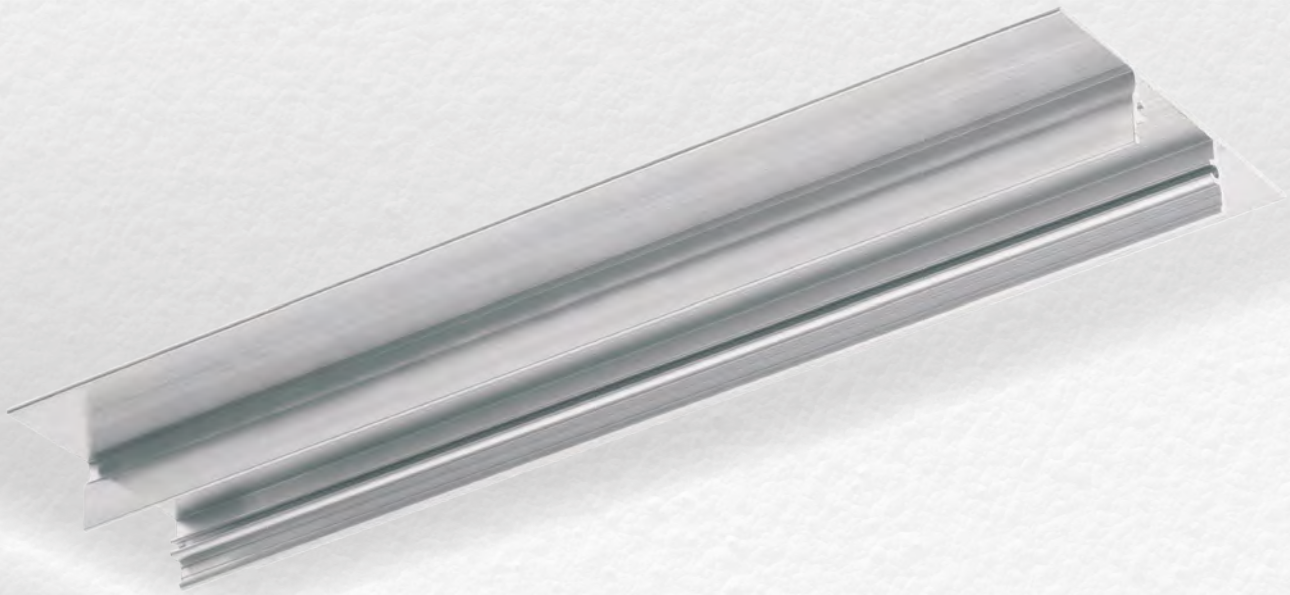

Total lenght	66,7 mm
Strip max clutter	21 mm
Height	14 mm
Profile type	Recessed
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF074/200

ACCESSORIES

PRF074

COVERS		Opal Polycarbonate 2m	PRF074PX01
		Silicon opal cover 30m	PRF074PXT1
CAPS		Grey plastic	PRF074TP01

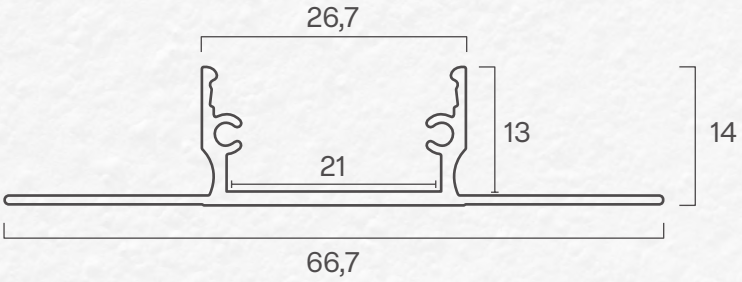

INSTALLATION

WALL - CEILING PLASTERBOARD



PRF079

Extruded aluminum profile for plasterboard mounting on ceilings or walls. Creates a small slot on the upper part of the wall or on the perimeter of the ceiling, from which the indirect light emitted by the LED strip installed inside comes out, with which to define in a discreet and integrated way every type of space and environment.

MAX
10 mm

MAX
28 W/m

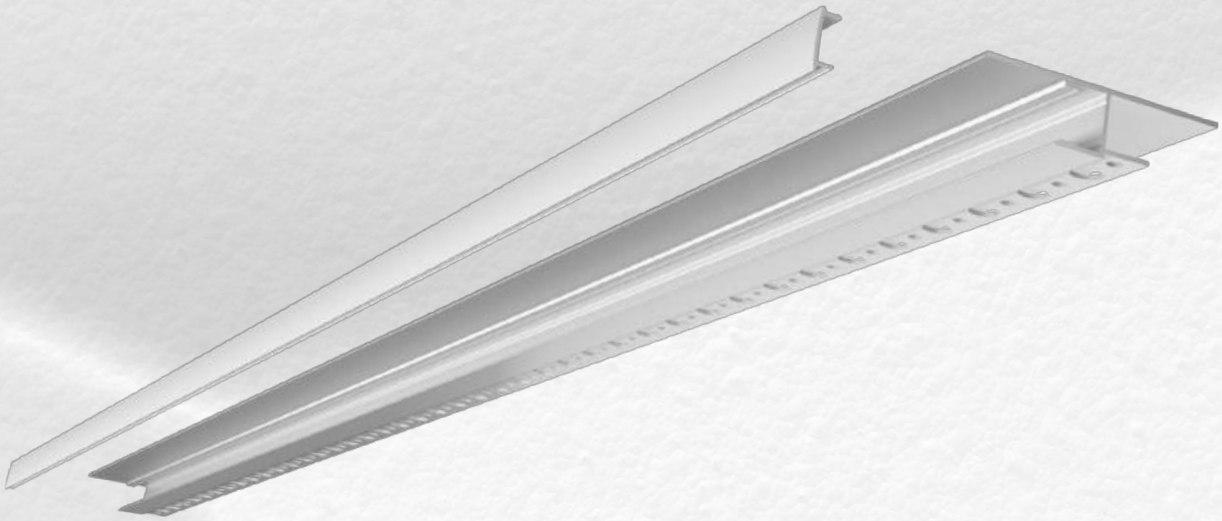

Total lenght	63,2 mm
Strip max clutter	10 mm
Height	16,68 mm
Profile type	Recessed
Applicable strip power	28 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF079/200

ACCESSORIES

PRF079

COVERS		Opal Polycarbonate	PRF079PX01
		Cover opal silicone 20 m	PRF079PXV1
CAPS		Grey plastic	PRF079TP01

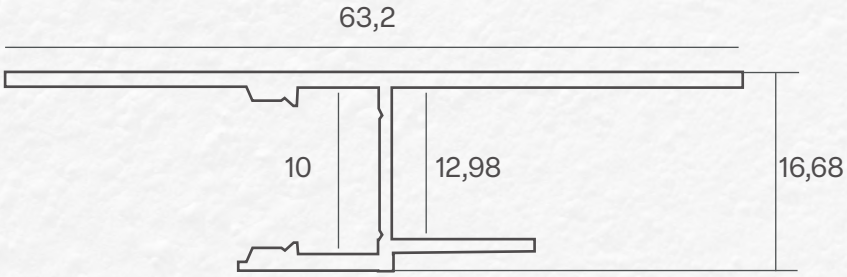

INSTALLATION

WALL - CEILING PLASTERBOARD

PRF084

Extruded aluminum profile, for recessed mounting on plasterboard walls. Ideal for being placed at the base of the wall like a skirting board. Creates a line or cut of light on the wall, with indirect diffusion, with which to define and illuminate private and commercial environments and spaces.

MAX
10 mm

MAX
23 W/m

Total lenght	16 mm
Strip max clutter	10 mm
Height	84 mm
Profile type	Recessed
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF084/200

ACCESSORIES

PRF084

COVERS		Opal Polycarbonate	PRF084PX01
CAPS		Grey metal	PRF084TP01
BRACKETS		Small linear joint	SSG002C
		L flat Joint Bracket Set	SSG002CP

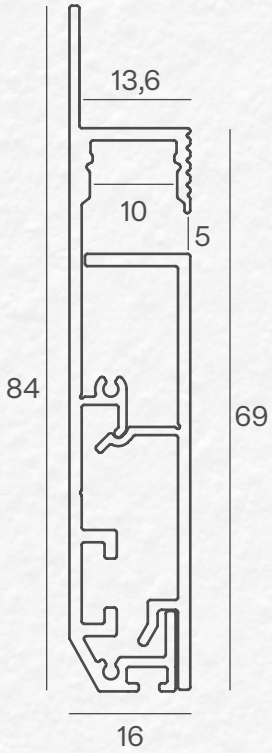

INSTALLATION

WALL



PRF090

Anodized extruded aluminum profile and recessed optics for plasterboard. Recessed ceiling and wall installation, completely disappearing, with fixing fins placed at the base to facilitate installation and smoothing. Ideal for creating continuous lines of light perfectly integrated into the walls.

MAX
13 mm

MAX
23 W/m

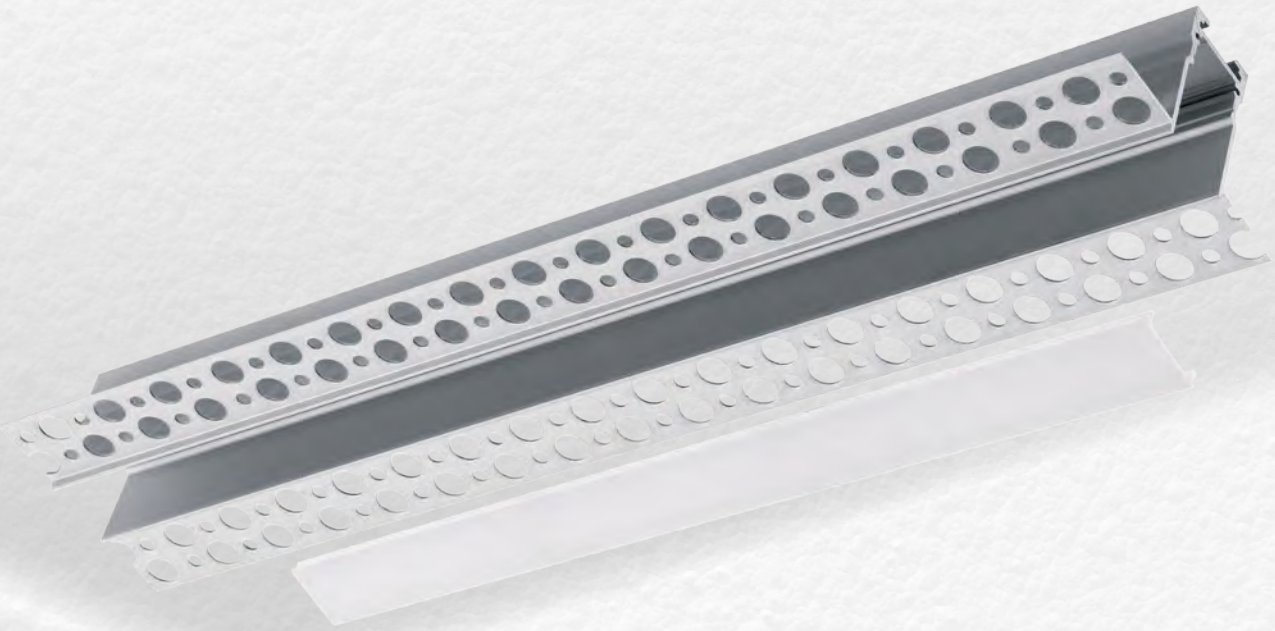

Total lenght	60,9 mm
Strip max clutter	13 mm
Height	37 mm
Profile type	Recessed
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF090/200G

COVERS



Opal Polycarbonate 2m	PRF090PX01
Disposable Shaving cover 2m	PRF090PX07

CAPS

Grey metal	PRF090TP01

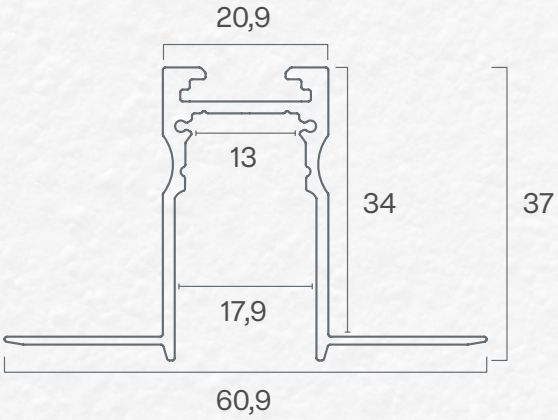

INSTALLATION

WALL - CEILING PLASTERBOARD



PRF094

Slim recessed anodized aluminum extruded profile, flexible and foldable to create curves and arches of light with wide angles, inside walls and ceilings. The particular structure of the profile allows it to be curved and shaped by hand without the use of specific tools or accessories and directly during installation. Integrated with the LED strip inside them and applied the cover, they create an effect of lines and curves of light that highlight the furniture and the surrounding spaces.

Curvabile

MAX 12 mm

MAX 14.4 W/m

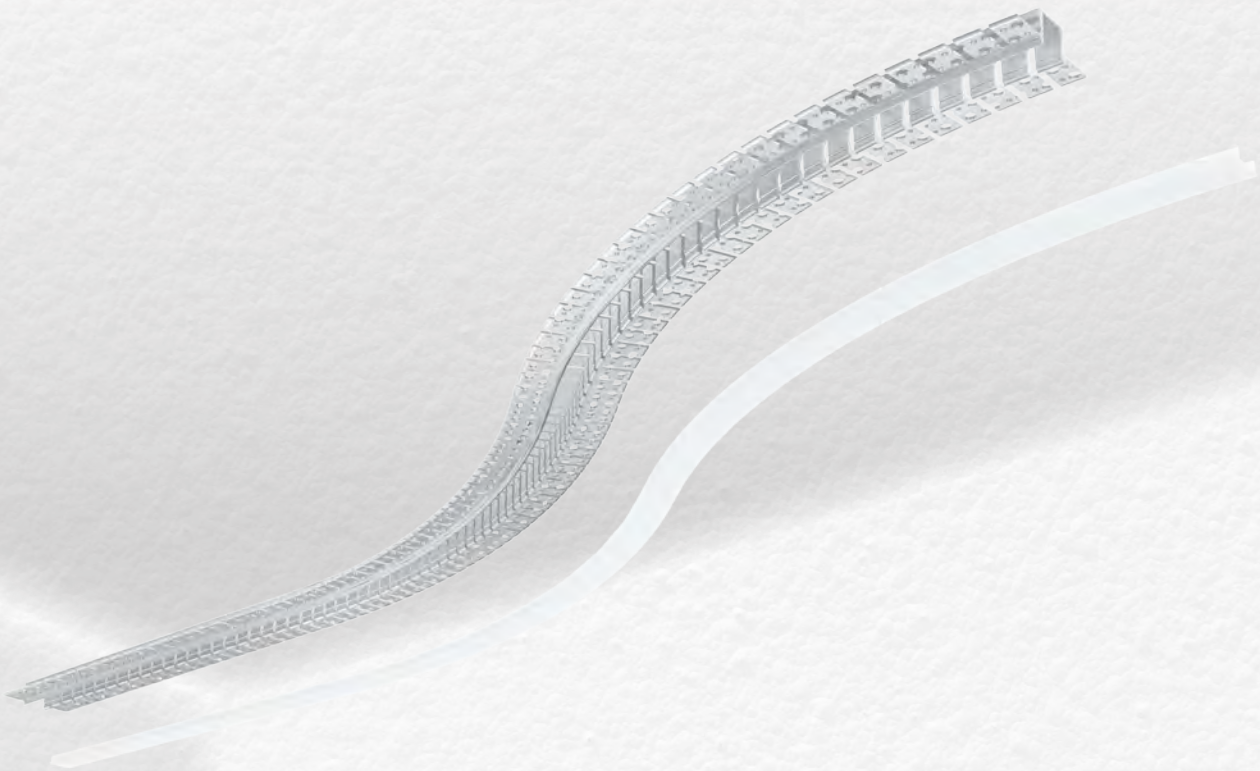

Total lenght	50,1 mm
Strip max clutter	12 mm
Height	14,8 mm
Profile type	Recessed
Applicable strip power	14.4 W/m
Bendable	Yes

Lenght	Finish	Code
1 m		PRF094/100G
2 m		PRF094/200G
3 m		PRF094/300G

COVERS

Opal silicone 1m	PRF094PX11
Opal silicone 2m	PRF094PX21
Opal silicone 3m	PRF094PX31

Black opal silicone 1m	PRF094PX11B
Black opal silicone 2m	PRF094PX21B
Black opal silicone 3m	PRF094PX31B

Opal silicone 20m	PRF094PXV1

CAPS

Grey plastic	PRF094TP01

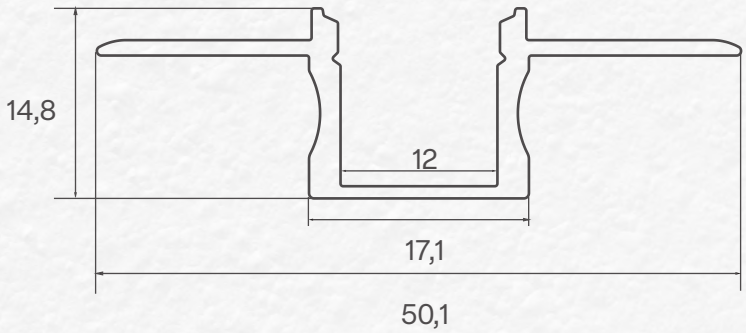

INSTALLATION

WALL - CEILING PLASTERBOARD

Wide recessed anodized aluminum extruded profile, flexible and foldable to create curves and arches of light with wide angles, inside walls and ceilings. The particular structure of the profile allows it to be curved and shaped by hand without the use of specific tools or accessories and directly during installation. Integrated with the LED strip inside them and applied the cover, they create an effect of lines and curves of light that highlight the furniture and the surrounding spaces.

Curvabile

MAX 20 mm

MAX 23 W/m

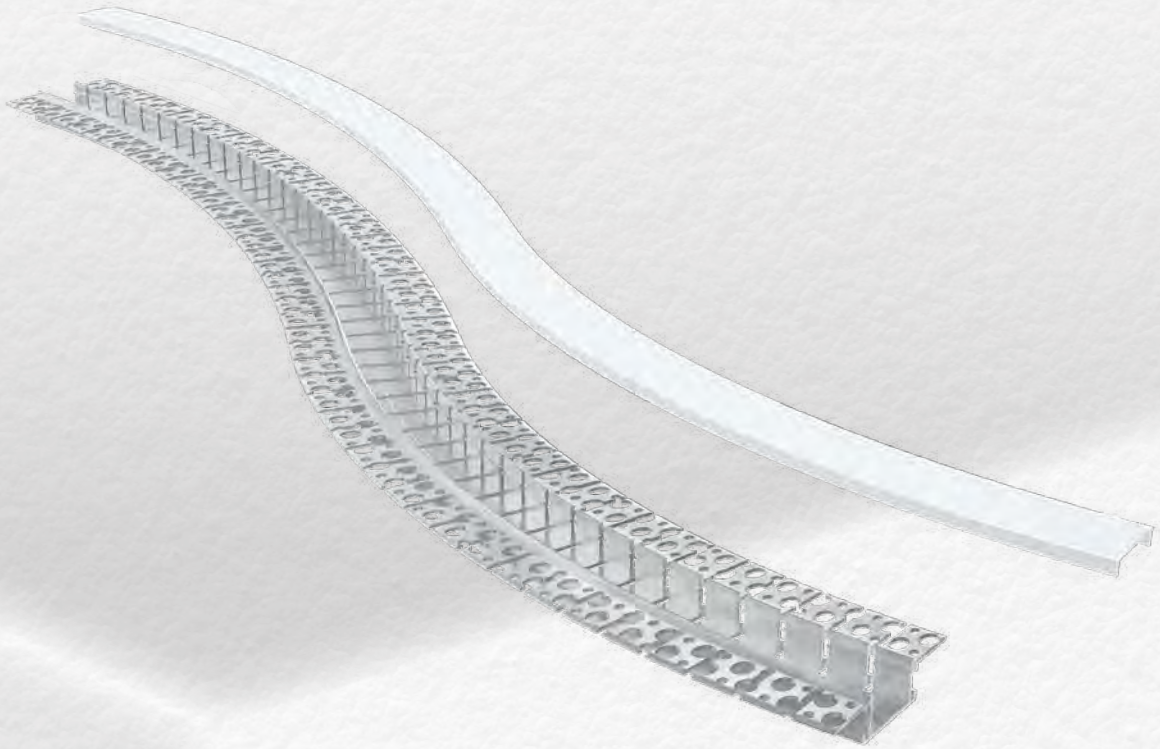

Total lenght	61,5 mm
Strip max clutter	20 mm
Height	14 mm
Profile type	Recessed
Applicable strip power	23 W/m
Bendable	Yes

Lenght	Finish	Code
1 m		PRF095/100
2 m		PRF095/200
3 m		PRF095/300

COVERS

Opal silicone 1m	PRF095PX11
Opal silicone 2m	PRF095PX21
Opal silicone 3m	PRF095PX31

Black opal silicone 1m	PRF095PX11B
Black opal silicone 2m	PRF095PX21B
Black opal silicone 3m	PRF095PX31B

Opal silicone 20m	PRF095PXV1

CAPS

Grey plastic	PRF095TP01

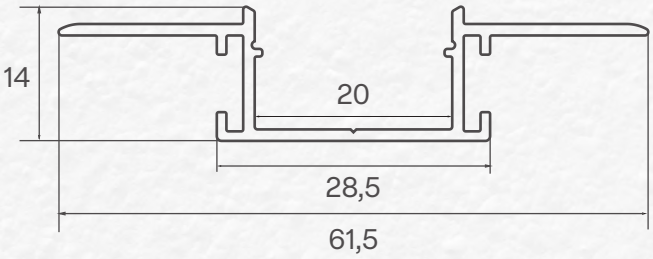

INSTALLATION

WALL - CEILING PLASTERBOARD

Extruded aluminum profile for recessed installation on a single sheet of plasterboard. It allows installation even in situations where the plasterboard has already been laid, in fact thanks to its reduced depth, once the cut has been made, it can be fixed directly to the sheet. The fixing is done with screws on the side fins, then it is plastered and smoothed, thus creating continuous and uniform lines of light.

MAX
40 mm

MAX
23 W/m

Total lenght	94,7 mm
Strip max clutter	40 mm
Height	19 mm
Profile type	Recessed
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRF096/200
3 m		PRF096/300

ACCESSORIES

PRF096

COVERS		Opal Polycarbonate 2m	PRF096PX01
		Opal Polycarbonate 3m	PRF096PX31
CAPS		Grey plastic	PRF096TP01
BRACKETS		Joint linear bracket	SSG001C
		L/L Joint Bracket Set	SSG001CL
		L flat Joint Bracket Set	SSG001CP

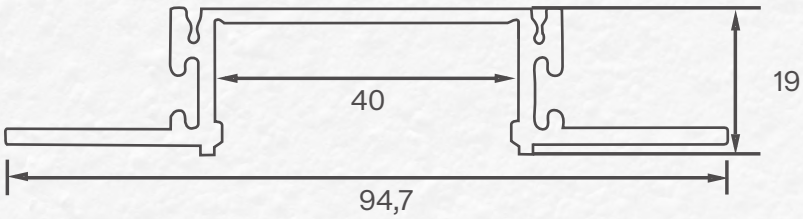

INSTALLATION

WALL - CEILING PLASTERBOARD



Anodized extruded aluminum profile for recessed mounting on walls and plasterboard. Ideal for illuminating with indirect light creating uniform diffusion throughout the room.

MAX **14 mm**

MAX **14.4 W/m**

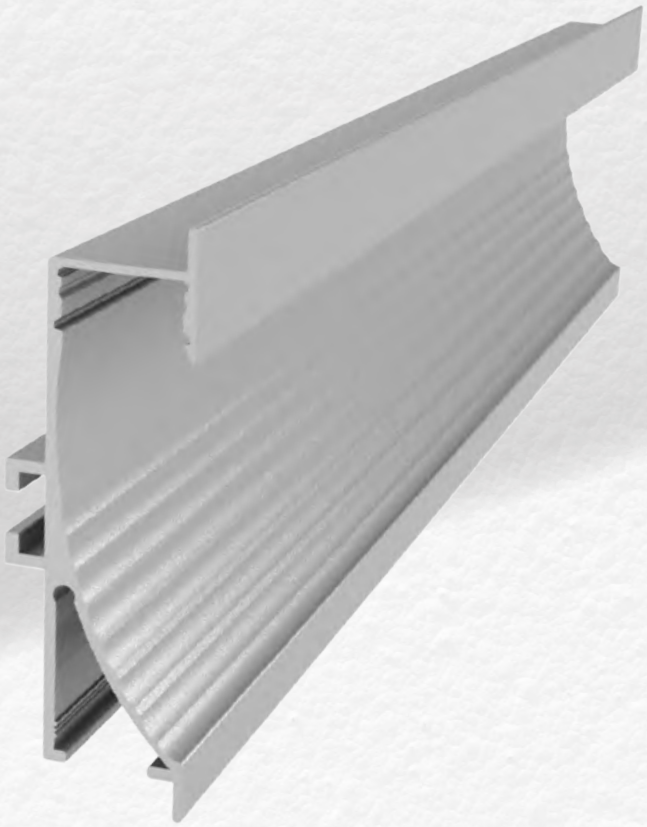

Total lenght	29,2 mm
Strip max clutter	14 mm
Height	70 mm
Profile type	Recessed
Applicable strip power	14.4 W/m
Bendable	No

Lenght	Finish	Code
1 m		PRF098/100
		PRF098/100W
2 m		PRF098/200
		PRF098/200W

ACCESSORIES

PRF098

COVERS		Opal Polycarbonate 1m	PRF098PX11
		Opal Polycarbonate 2m	PRF098PX01
CAPS		Grey plastic	PRF098TP01
		White plastic	PRF098TP02
BRACKETS		Metal spring bracket	PRF098ST01

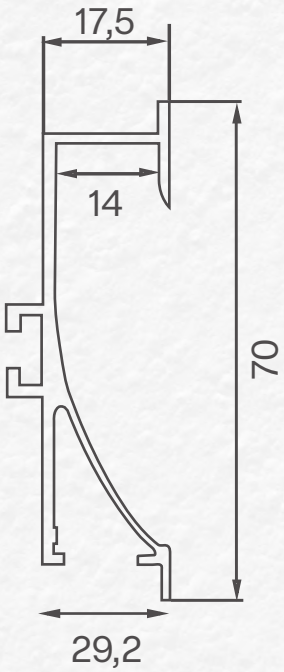

INSTALLATION

WALL RECESSED





Extruded aluminum profile coupled with plasterboard for direct light diffusion, integrated with a single 13mm thick plasterboard sheet, ready for recessed installation. Installed on ceilings and walls, it integrates perfectly with total disappearance, diffusing the light with a particular effect of uniformity and continuity on the wall or ceiling.

MAX **15 mm**

MAX **19.2 W/m**

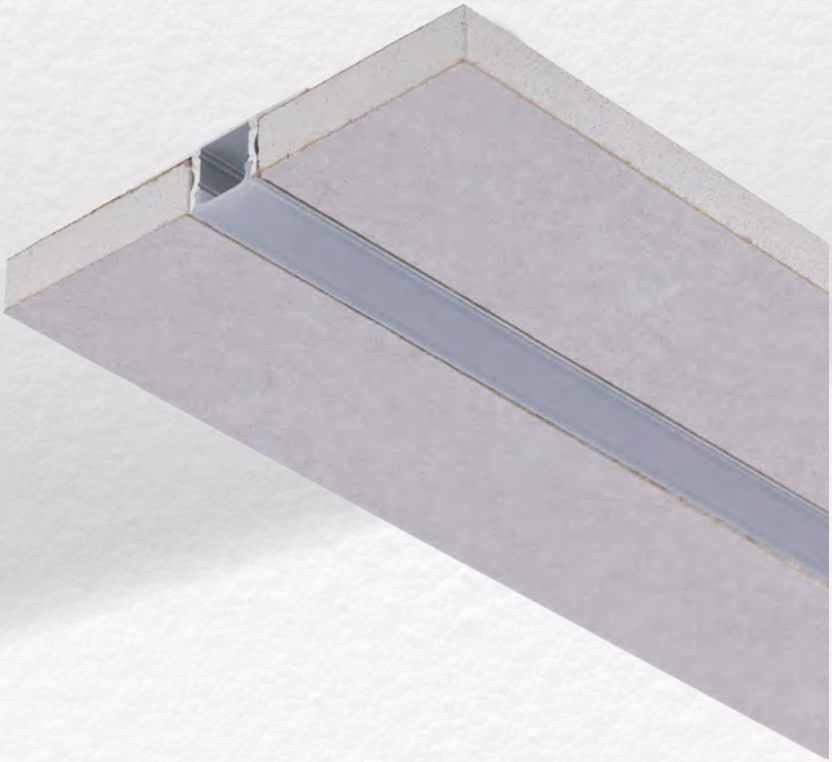

Total lenght	117,1 mm
Strip max clutter	15 mm
Height	12,9 mm
Profile type	Plasterboard coupled
Applicable strip power	19.2 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRC073/200

ACCESSORIES

PRC073

COVERS		Opal Polycarbonate 2m	PRC073PX01
CAPS		Grey plastic	PRC073TP01
CONNETTORI		Paired angle joint	PRF073CP01
		Paired angle joint wall/ceiling	PRF073CL01

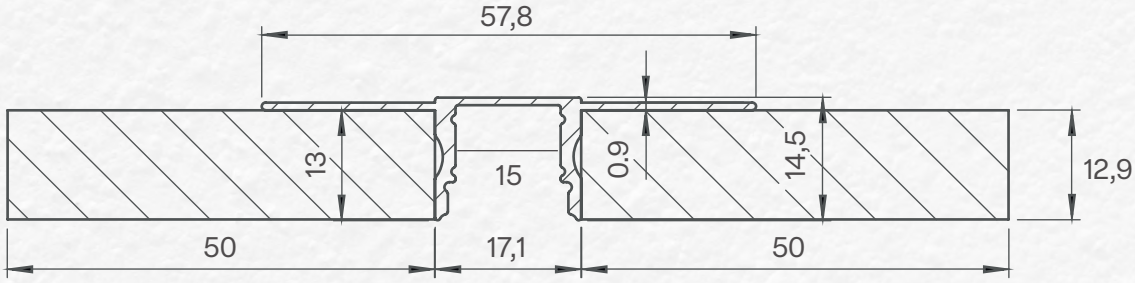

INSTALLATION

WALL - CEILING PLASTERBOARD

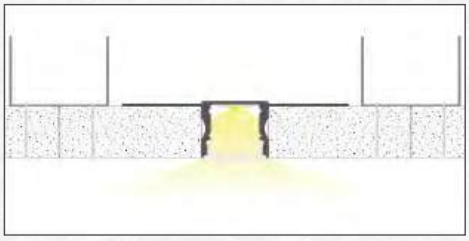

Wide extruded aluminum profile coupled with plasterboard for direct light diffusion, integrated with a single 13mm thick plasterboard sheet, ready for recessed installation. Installed on ceilings and walls, it integrates perfectly with total disappearance, diffusing the light with a particular effect of uniformity and continuity on the wall or ceiling.

MAX
18 mm

MAX
19.2 W/m

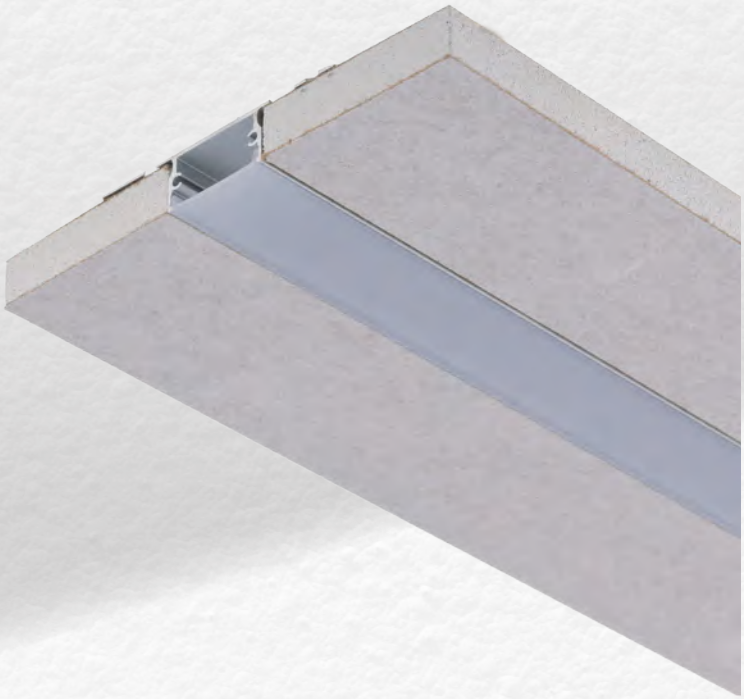

Total lenght	126,7 mm
Strip max clutter	18 mm
Height	12,9 mm
Profile type	Plasterboard coupled
Applicable strip power	19.2 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRC074/200

ACCESSORIES

COVERS		Opal Polycarbonate 2m	PRC074PX01
CAPS		Grey plastic	PRC074TP01
CONNETTORI		Paired angle joint	PRF074CP01
		Paired angle joint wall/ceiling	PRF074CL01

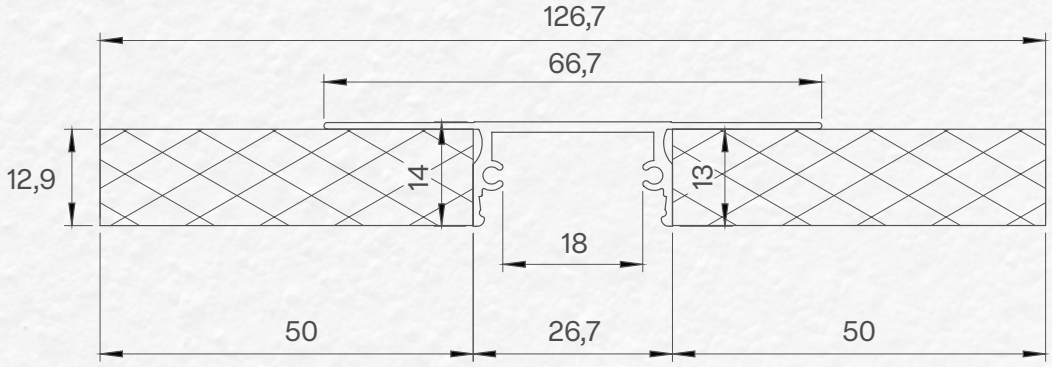

INSTALLATION

WALL - CEILING PLASTERBOARD

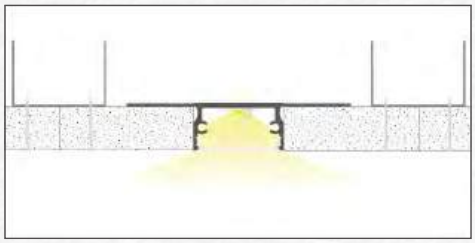

Anodized aluminum extrusion profile coupled with plasterboard for indirect light diffusion, ready for recessed installation. Installed on the perimeter of the areas to be illuminated, it integrates perfectly with total disappearance, diffusing the light indirectly, creating a particular sail or wallwasher effect on the wall.

MAX
19 mm

MAX
23 W/m

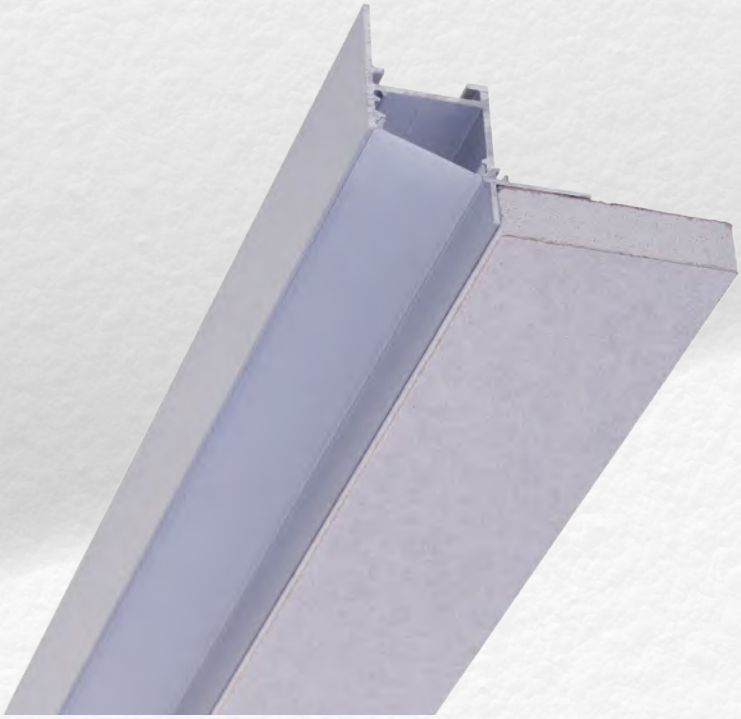

Total lenght	74,4 mm
Strip max clutter	19 mm
Height	52,8 mm
Profile type	Plasterboard coupled
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2 m		PRC099/200

ACCESSORIES

PRC099

COVERS		Opal Polycarbonate 2m	PRF099PX01
CAPS		Grey metal	PRF099TP01
CONNECTOR		Right corner joint coupled to plasterboard	PRC099CD01
		Left corner joint coupled to plasterboard	PRC099CS01

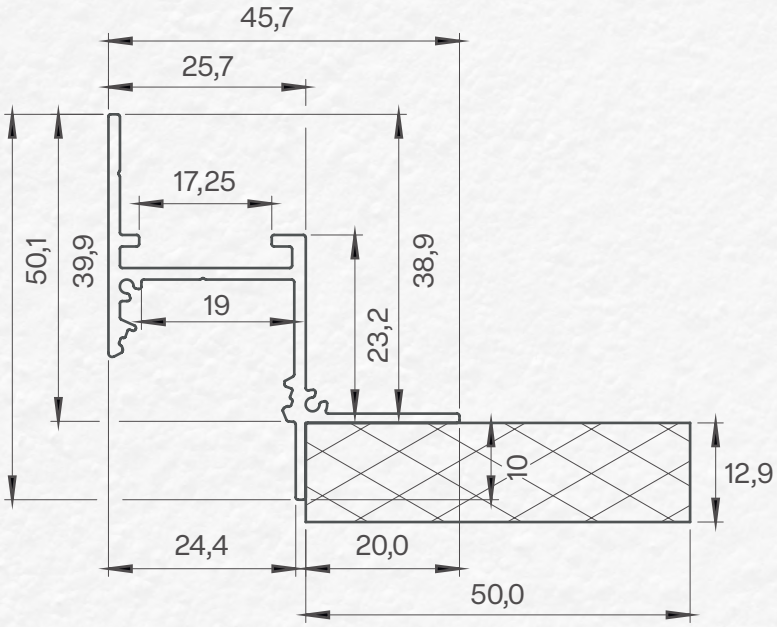

INSTALLATION

WALL - CEILING PLASTERBOARD

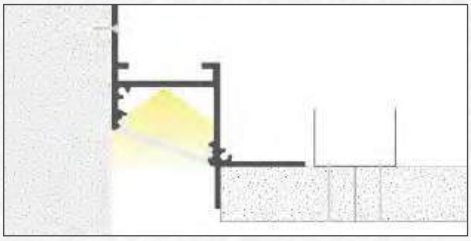

2 meter panel with aluminum profile already integrated in plasterboard sheet. The profile includes opal cover and rubber to protect the profile during plastering and painting. The profile can accommodate a maximum 12mm strip.
Perfect for installation in environments to be illuminated with light cuts in the false ceiling. Implement the installation with additional corner panels.

MAX
12 mm

MAX
14.4 W/m

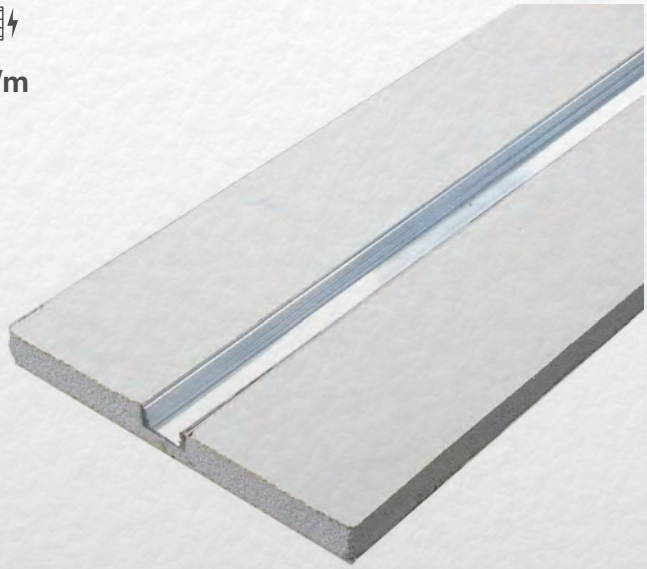

INCLUDED IN THE KIT

RUBBER FOR PLASTERING

+

COVER

Profile type	Plasterboard
Slab dimensions	2000x126x12.5 mm
Profile dimensions	17x7.6 mm
Strip max clutter	12 mm
Applicable strip power	14.4 W/m
Cover	Cover opale + Rubber

Material	Use	Code
Plasterboard	Indoor	PRC2004
Waterproof plasterboard	Outdoor	PRC2004/ID
Fireproof plasterboard	Public places	PRC2004/IG

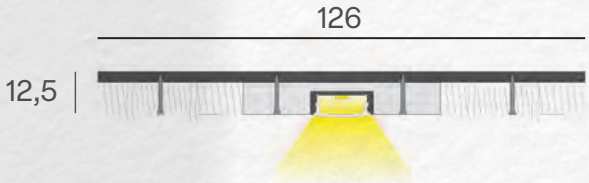



	Material	Use	Code
JOINT "CROCE"	Plasterboard	Indoor	PRC2004C
	Waterproof plasterboard	Outdoor	PRC2004C/ID
	Fireproof plasterboard	Public places	PRC2004C/IG

JOINT "T"	Plasterboard	Indoor	PRC2004T
	Waterproof plasterboard	Outdoor	PRC2004T/ID
	Fireproof plasterboard	Public places	PRC2004T/IG



JOINT "L"	Plasterboard	Indoor	PRC2004L
	Waterproof plasterboard	Outdoor	PRC2004L/ID
	Fireproof plasterboard	Public places	PRC2004L/IG



JOINT "CEILING/ WALL"	Plasterboard	Indoor	PRC2004SP
	Waterproof plasterboard	Outdoor	PRC2004SP/ID
	Fireproof plasterboard	Public places	PRC2004SP/IG

2 meter sail panel with aluminum profile already integrated into plasterboard sheet. The profile includes opal cover and rubber to protect the profile during plastering and painting. The profile can accommodate a strip of maximum 12mm. Perfect for installation in environments to be illuminated with light cuts in the false ceiling.

MAX
12 mm

MAX
14.4 W/m

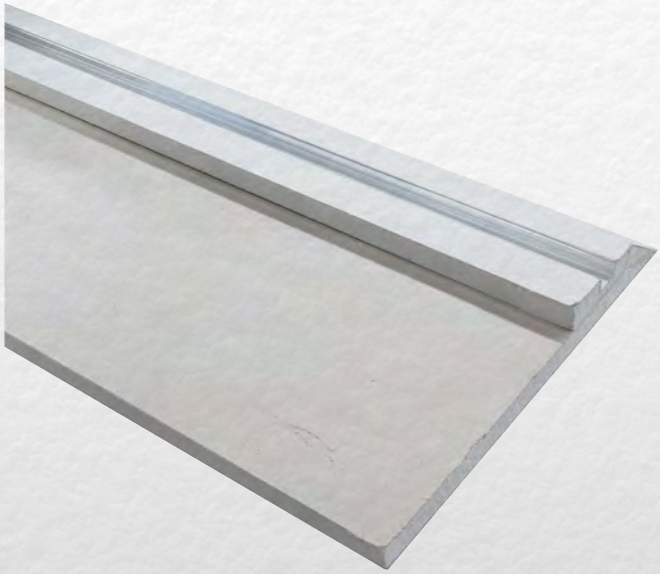

INCLUDED IN THE KIT

RUBBER FOR PLASTERING

+

COVER

Profile type	Plasterboard
Slab dimensions	2000x280x25 mm
Profile dimensions	17x7.6 mm
Strip max clutter	12 mm
Applicable strip power	14.4 W/m
Cover	Cover opale + Rubber

Material	Use	Code
Plasterboard	Indoor	PRC2005
Waterproof plasterboard	Outdoor	PRC2005/ID
Fireproof plasterboard	Public places	PRC2005/IG

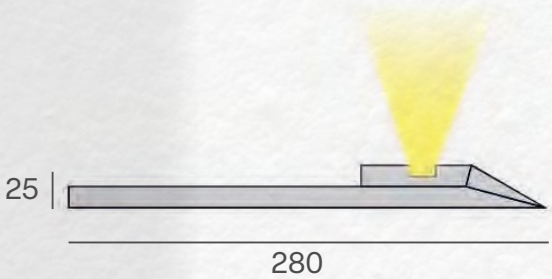

Anodized extruded aluminum profile kit for support. Consisting of 2 meter long bars with relative opal cover, caps and fixing clips, thus allowing easy and fast installation.

MAX **12 mm**

MAX **14.4 W/m**

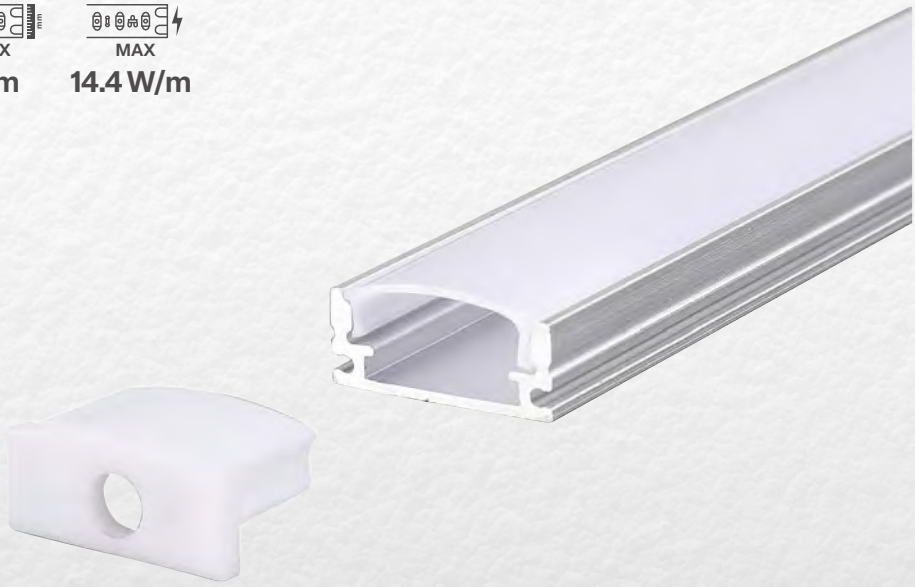

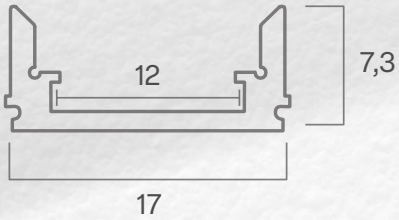

KIT COMPOSITION

Total lenght	17 mm
Strip max clutter	12 mm
Height	7,3 mm
Profile type	Support
Applicable strip power	14.4 W/m
Bendable	No

Lenght	Finish	Code
2 m		AT2004K1
		AT2004K2

INSTALLATION

WALL - CEILING

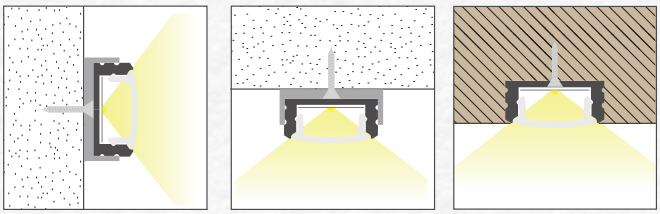

Anodized extruded aluminum profile kit for recessed installation. Consisting of 2 meter long bars with relative opal cover, caps and fixing clips, thus allowing easy and fast installation.

MAX
12 mm

MAX
14.4 W/m

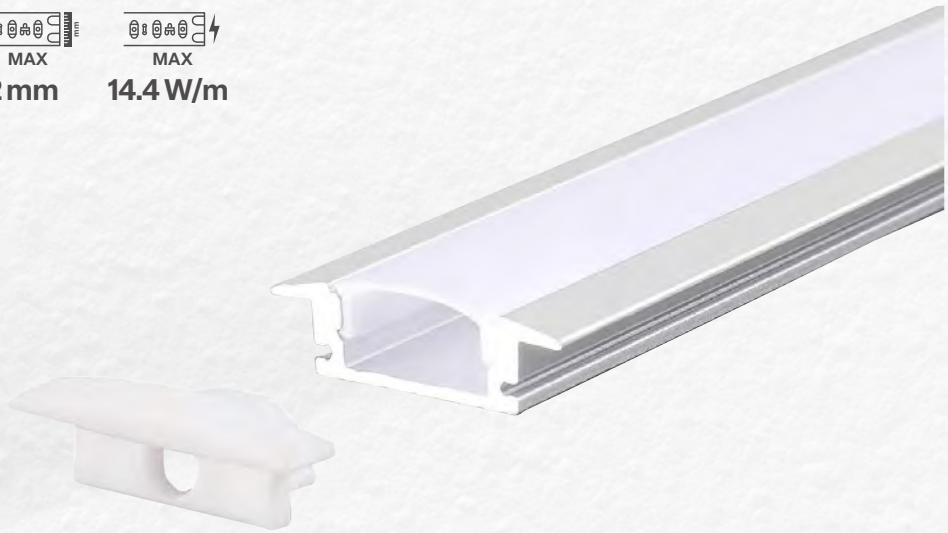

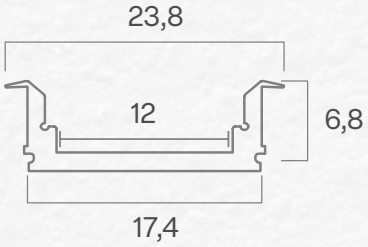

KIT COMPOSITION

Total lenght	23,8 mm
Strip max clutter	12 mm
Height	6,8 mm
Profile type	Recessed
Applicable strip power	14.4 W/m
Bendable	No

Lenght	Finish	Code
2 m		AT2005K1

INSTALLATION

RECESSED - FURNITURE

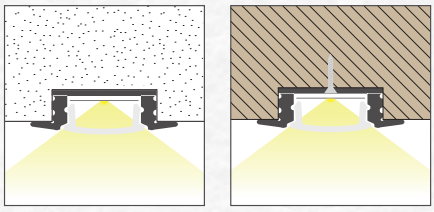

AT2007

Angular anodized extruded aluminum profile kit with concealed structure. Composed of 2 meter long bars with relative curved opal cover, caps and fixing clips, thus allowing easy and fast installation.

MAX
10 mm

MAX
14.4 W/m

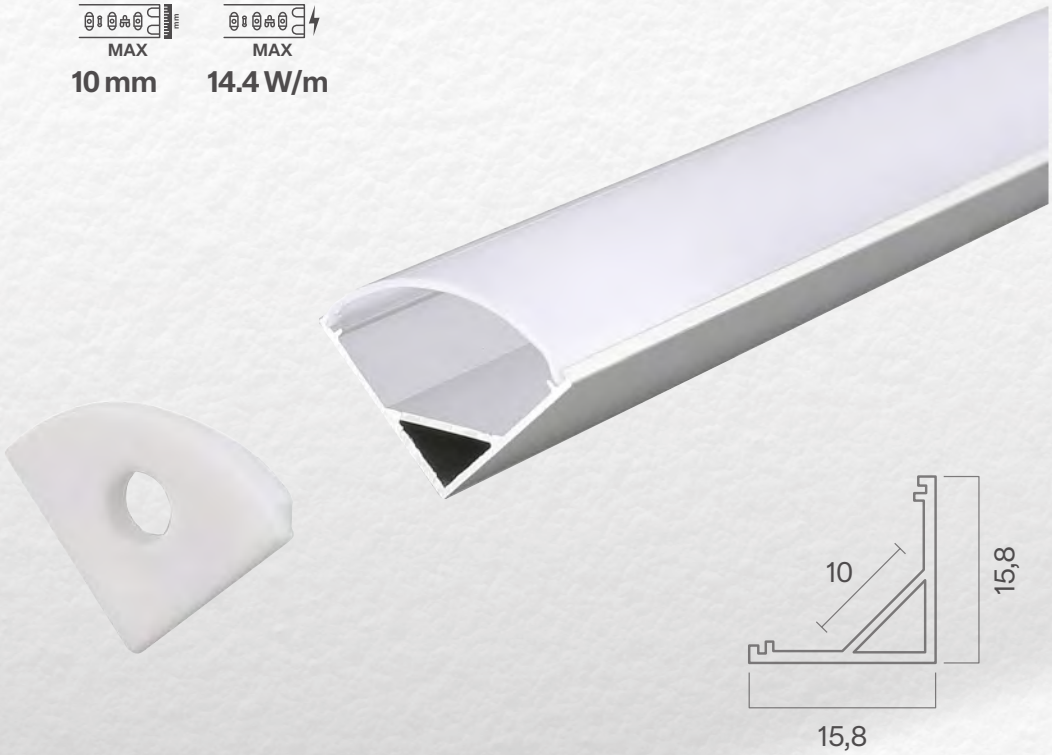

KIT COMPOSITION

Total lenght	15,8 mm
Strip max clutter	10 mm
Height	15,8 mm
Profile type	Angle
Applicable strip power	14.4 W/m
Bendable	No

Lenght	Finish	Code
2 m		AT2007K1

INSTALLATION

WALL - CEILING



Angular anodized extruded aluminum profile kit. Consisting of 2 meter long bars with relative opal cover, caps and fixing clips, thus allowing easy and fast installation.

MAX
12 mm

MAX
19.2 W/m

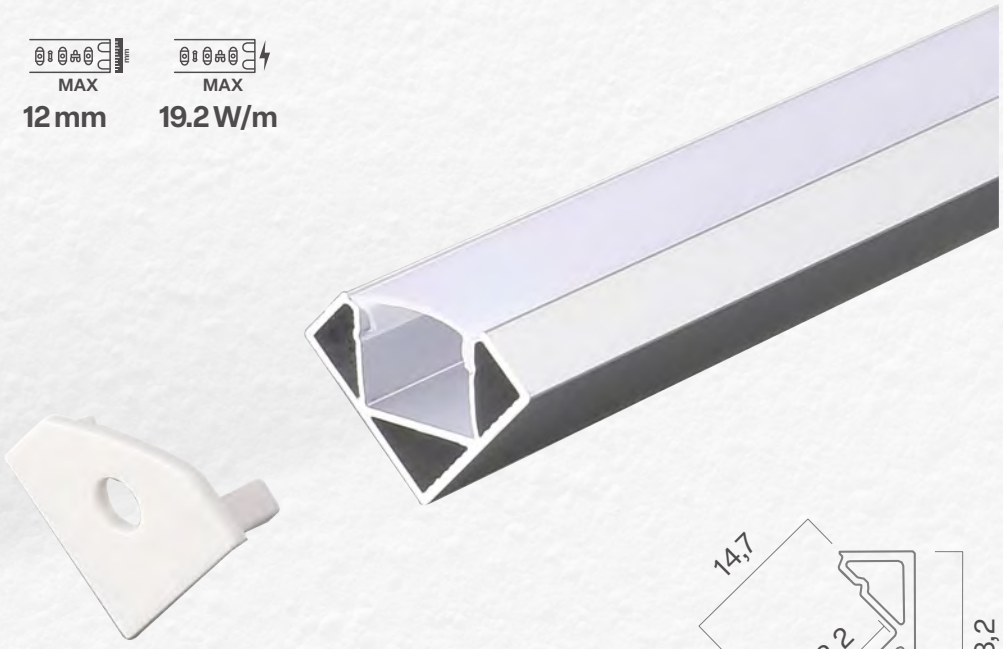



KIT COMPOSITION

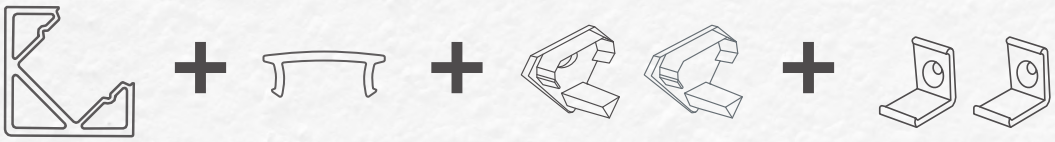

Total lenght	18,2 mm
Strip max clutter	12 mm
Height	18,2 mm
Profile type	Angle
Applicable strip power	19.2 W/m
Bendable	No

Lenght	Finish	Code
2 m		AT2027K1

INSTALLATION

WALL - CEILING



AT2073

Anodized extruded aluminum profile kit for plasterboard recessed installation. Consisting of 2 meter long bars with relative opal cover, caps and fixing clips, thus allowing easy and fast installation.

MAX
12 mm

MAX
19.2 W/m

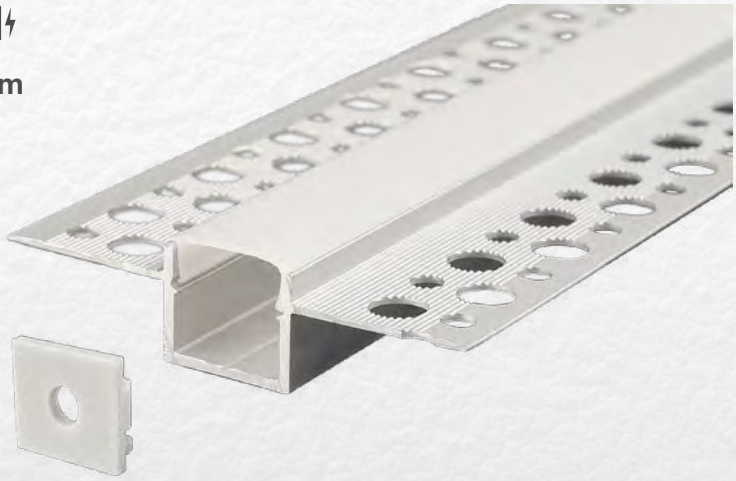

KIT COMPOSITION



Total lenght	55,5 mm
Strip max clutter	12 mm
Height	15 mm
Profile type	Plasterboard
Applicable strip power	19.2 W/m
Bendable	No

Lenght	Finish	Code
2 m		AT2073K1

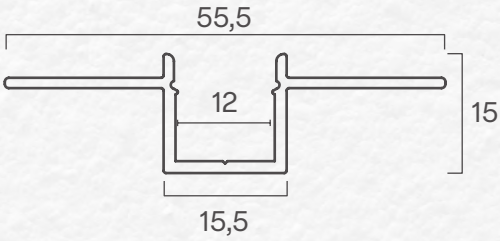

ACCESSORIES

Cover opale silicone 30m	AT2073PX30
Rubber for smoothing	AT2073G

INSTALLATION

WALL - CEILING - PLASTERBOARD



Wide anodized extruded aluminum profile kit for plasterboard recessed installation. Consisting of 2 meter long bars with relative opal cover, caps and fixing clips, thus allowing easy and fast installation.

MAX
20 mm

MAX
23 W/m

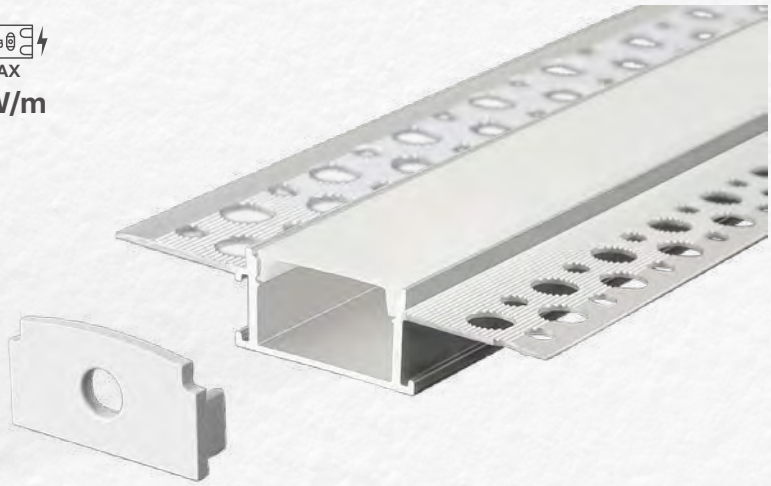

KIT COMPOSITION

Total lenght	61,3 mm
Strip max clutter	20 mm
Height	14,1 mm
Profile type	Plasterboard
Applicable strip power	23 W/m
Bendable	No

Lenght	Finish	Code
2 m		AT2074K1

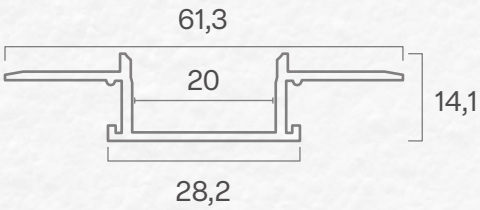

ACCESSORIES

Cover opale silicone 30m	AT2074PX30
Rubber for smoothing	AT2074G

INSTALLATION

WALL - CEILING - PLASTERBOARD



LED STRIPS

VERSATILE AND EFFICIENT

A range of single-colour and multi-colour LED strips, designed to offer high performance and long life. Made with top-quality components, they guarantee uniform and bright lighting of spaces. Our LED strips can be cut to size and adapted for mounting on multiple surfaces. Flexibility and customisation are the strengths of our products, with which to create unique and creative lighting solutions. The versions for outdoor use are made in various levels of sealing from IP65 to IP68, ideal for lighting gardens, terraces and swimming pools, even with chlorine-resistant models. Present in our range, digital LED strips allow you to create different light effects on a single strip, thanks to the intelligent chips integrated into the PCB. Neonflex are ideal for giving new shapes to light; WallWashers also represent the ideal solution for lighting facades and details of buildings, terraces and exteriors. At Dogi LED, distance does not scare us; with 220V LED strips, we are able to illuminate long stretches without sacrificing brightness.

STANDARD PAG 418

HIGH YIELD PAG 426

HIGH EFFICIENCY PAG 430

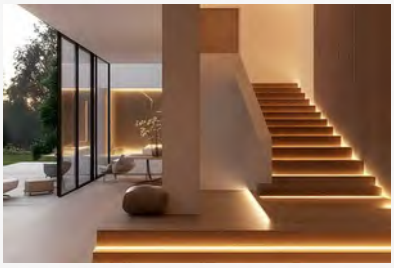

SLIM LED STRIP PAG 434

MINI CUT PAG 438

OUTDOOR STRIP PAG 442

STRIP LED COB PAG 450

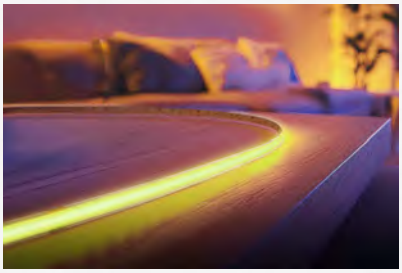

CCT LED STRIP PAG 456

MULTICOLOR PAG 460

DIGITAL STRIP LED PAG 478

STRIPS

WALLWASHER PAG 484

DIM TO WARM PAG 488

FOOD STRIP PAG 490

STRIP LED “S” PAG 492

POOL STRIP PAG 494

NEON LED PAG 496

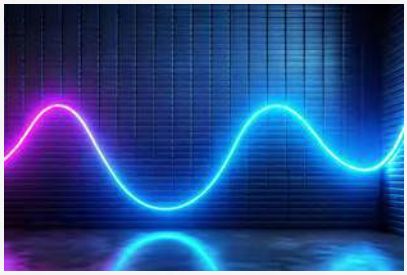

220V AC STRIP LED PAG 512

ER1060

INDOOR

STRIP LED 12V 2835 4,8W/M

CRI >80

IP20

2700K – 480 lm/m	ER1060G01
3000K – 500 lm/m	ER1060C01
4000K – 520 lm/m	ER1060N01
6500K – 550 lm/m	ER1060F01

Supply	12 Vdc
LED number	64 Led/m
Power	4.8 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1062

INDOOR

STRIP LED 12V 2835 9.6W/M

CRI >80

IP20

2700K – 980 lm/m	ER1062G01
3000K – 1000 lm/m	ER1062C01
4000K – 1050 lm/m	ER1062N01
6500K – 1100 lm/m	ER1062F01

Supply	12 Vdc
LED number	128 Led/m
Power	9.6 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1069

INDOOR

STRIP LED 12V 2835 14.4W/M

CRI >80

IP20

2700K 1550 lm/m	ER1069G01
3000K 1560 lm/m	ER1069C01
4000K 1580 lm/m	ER1069N01
6500K 1600 lm/m	ER1069F01

Supply	12 Vdc
LED number	144 Led/m
Power	14.4 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1060

INDOOR

STRIP LED 24V 2835 4,8W/M

CRI >80

IP20

2700K 480 lm/m	ER1060G02
3000K 500 lm/m	ER1060C02
4000K 520 lm/m	ER1060N02
6500K 550 lm/m	ER1060F02

Supply	24 Vdc
LED number	64 Led/m
Power	4.8 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1062

INDOOR

STRIP LED 24V 2835 9.6W/M

CRI >80

IP20

2700K 980 lm/m	ER1062G02
3000K 1000 lm/m	ER1062C02
4000K 1050 lm/m	ER1062N02
6500K 1100 lm/m	ER1062F02

Supply	24 Vdc
LED number	128 Led/m
Power	9.6 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1064

INDOOR

STRIP LED 24V 2835 12W/M

CRI >80

IP20

2700K 1580 lm/m	ER1064G02
3000K 1600 lm/m	ER1064C02
4000K 1650 lm/m	ER1064N02
6500K 1700 lm/m	ER1064F02

Supply	24 Vdc
LED number	128 Led/m
Power	12 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1069

INDOOR

STRIP LED 24V 2835 14.4W/M

CRI >80

IP20

2700K 1550 lm/m	ER1069G02
3000K 1560 lm/m	ER1069C02
4000K 1580 lm/m	ER1069N02
6500K 1600 lm/m	ER1069F02

Supply	24 Vdc
LED number	144 Led/m
Power	14.4 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1071

INDOOR

STRIP LED 24V 2835 19.2W/M

CRI >80

IP20

2700K – 2680 lm/m	ER1071G02
3000K – 2700 lm/m	ER1071C02
4000K – 2750 lm/m	ER1071N02
6500K – 2780 lm/m	ER1071F02

Supply	24 Vdc
LED number	240 Led/m
Power	19.2 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

HIGH YIELD

ER1063

INDOOR

STRIP LED 24V 2835 CRI90 9.6W/M

CRI >90

IP20

2700K – 980 lm/m	ER1063G02
3000K – 1000 lm/m	ER1063C02
4000K – 1050 lm/m	ER1063N02
6500K – 1100 lm/m	ER1063F02

Supply	24 Vdc
LED number	120 Led/m
Power	9.6 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1065

INDOOR

STRIP LED 24V 2835 CRI90 14.4W/M

CRI >90

IP20

2700K 1700 lm/m	ER1065G02
3000K 1730 lm/m	ER1065C02
4000K 1750 lm/m	ER1065N02
6500K 1800 lm/m	ER1065F02

Supply	24 Vdc
LED number	168 Led/m
Power	14.4 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1067

INDOOR

STRIP LED 24V 2835 CRI90 19.2W/M

CRI >90

IP20

2700K – 2280 lm/m	ER1067G02
3000K – 2300 lm/m	ER1067C02
4000K – 2350 lm/m	ER1067N02
6500K – 2400 lm/m	ER1067F02

Supply	24 Vdc
LED number	240 Led/m
Power	19.2 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

HIGH EFFICIENCY

PS5630K

SPECIAL

STRIP LED HIGH EFFICIENCY 19,2W/M

CRI >90

IP20

2700K 3250 lm/m	PS5630K220G
3000K 3500 lm/m	PS5630K220C
4000K 3550 lm/m	PS5630K220N
6500K 3600 lm/m	PS5630K220F



Supply	24 Vdc
LED number	180 Led/m
Power	19.2 W/m
Protection Degree	IP20
LED type	5630
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

PS2835WM

SPECIAL

STRIP LED HIGH EFFICIENCY 2835 23W/M

CRI >90

IP20

2700K 3000 lm/m	PS2835WM220G
3000K 3050 lm/m	PS2835WM220C
4000K 3100 lm/m	PS2835WM220N
6500K 3150 lm/m	PS2835WM220F

Supply	24 Vdc
LED number	240 Led/m
Power	23 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

SLIM LED STRIP

ER1059

STRIP LED SLIM 2835 9.6W/M

CRI >80

IP20

2700K – 980 lm/m	ER1059G02
3000K – 1000 lm/m	ER1059C02
4000K – 1050 lm/m	ER1059N02
6500K – 1100 lm/m	ER1059F02

Supply	24 Vdc
LED number	128 Led/m
Power	9.6 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1061

SPECIAL

STRIP LED SLIM 2110 14.4W/M

CRI >80

IP20

2700K 1670 lm/m	ER1061G02
3000K 1680 lm/m	ER1061C02
4000K 1690 lm/m	ER1061N02
6500K 1710 lm/m	ER1061F02

Supply	24 Vdc
LED number	240 Led/m
Power	14.4 W/m
Protection Degree	IP20
LED type	2110
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

MINI CUT

PS2835WK

STRIP LED MINICUT 2835 19,2W/M

CRI >90

IP20

2700K 2500 lm/m	PS2835WK220G
3000K 2550 lm/m	PS2835WK220C
4000K 2600 lm/m	PS2835WK220N
6500K 2650 lm/m	PS2835WK220F

Supply	24 Vdc
LED number	180 Led/m
Power	19.2 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

PS2835SM

SPECIAL

STRIP LED SINGLECUT 2835 23W/M

CRI >90

IP20

2700K 3000 lm/m	PS2835SM220G
3000K 3100 lm/m	PS2835SM220C
4000K 3150 lm/m	PS2835SM220N
6500K 3200 lm/m	PS2835SM220F

Supply	24 Vdc
LED number	240 Led/m
Power	23 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

OUTDOOR STRIP

ER1064

OUTDOOR

STRIP LED 12V 2835 12W/M

CRI >80

IP65

2700K – 1580 lm/m	ER1064G41
3000K – 1600 lm/m	ER1064C41
4000K – 1650 lm/m	ER1064N41
6500K – 1700 lm/m	ER1064F41

Supply	12 Vdc
LED number	128 Led/m
Power	12 W/m
Protection Degree	IP65
LED type	2835
(CRI)	>80
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1069

OUTDOOR

STRIP LED 12V 2835 14.4W/M

CRI >80

IP65

2700K 1550 lm/m	ER1069G41
3000K 1560 lm/m	ER1069C41
4000K 1580 lm/m	ER1069N41
6500K 1600 lm/m	ER1069F41

Supply	12 Vdc
LED number	144 Led/m
Power	14.4 W/m
Protection Degree	IP65
LED type	2835
(CRI)	>80
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1060

OUTDOOR

STRIP LED 24V 2835 4,8W/M

CRI >80

IP65

2700K – 480 lm/m	ER1060G42
3000K – 500 lm/m	ER1060C42
4000K – 520 lm/m	ER1060N42
6500K – 550 lm/m	ER1060F42

Supply	24 Vdc
LED number	64 Led/m
Power	4.8 W/m
Protection Degree	IP65
LED type	2835
(CRI)	>80
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1064

OUTDOOR

STRIP LED 24V 2835 12W/M

CRI >80

IP65

2700K 1580 lm/m	ER1064G42
3000K 1600 lm/m	ER1064C42
4000K 1650 lm/m	ER1064N42
6500K 1700 lm/m	ER1064F42

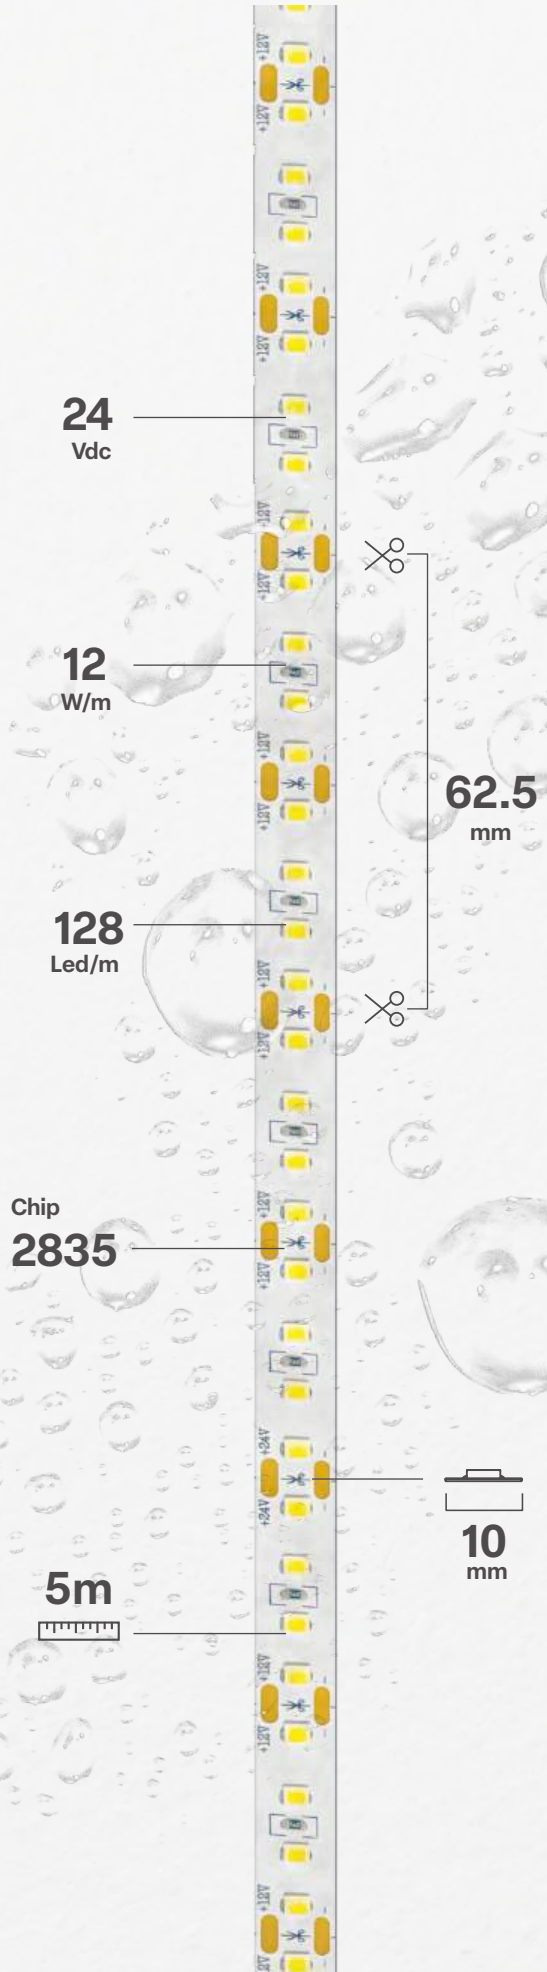

Supply	24 Vdc
LED number	128 Led/m
Power	12 W/m
Protection Degree	IP65
LED type	2835
(CRI)	>80
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1069

OUTDOOR

STRIP LED 24V 2835 14.4W/M

CRI >80

IP65

2700K 1550 lm/m	ER1069G42
3000K 1560 lm/m	ER1069C42
4000K 1580 lm/m	ER1069N42
6500K 1600 lm/m	ER1069F42

Supply	24 Vdc
LED number	144 Led/m
Power	14.4 W/m
Protection Degree	IP65
LED type	2835
(CRI)	>80
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1071

OUTDOOR

STRIP LED 24V 2835 19.2W/M

CRI >80

IP65

2700K 2680 lm/m	ER1071G42
3000K 2700 lm/m	ER1071C42
4000K 2750 lm/m	ER1071N42
6500K 2780 lm/m	ER1071F42

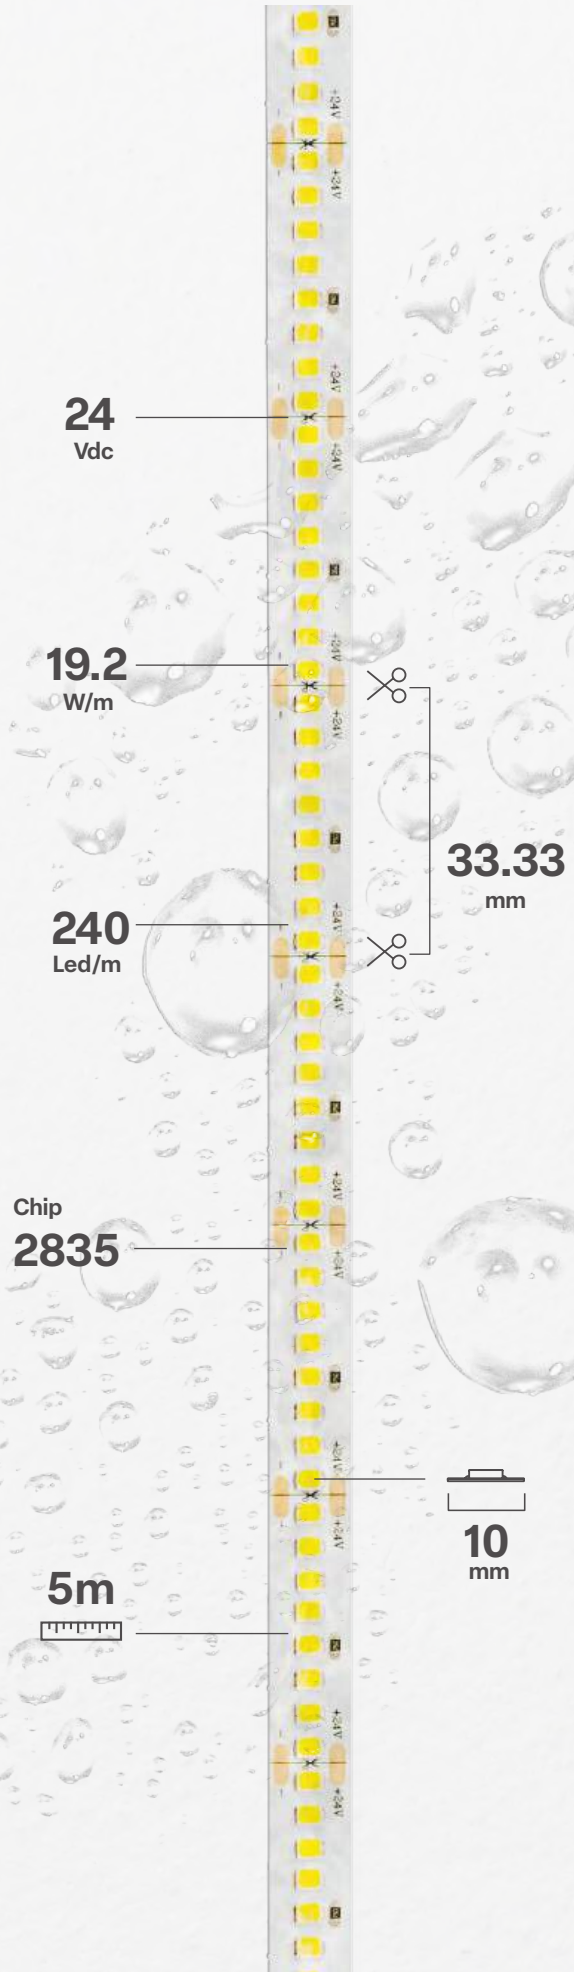

Supply	24 Vdc
LED number	240 Led/m
Power	19.2 W/m
Protection Degree	IP65
LED type	2835
(CRI)	>80
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

STRIP LED COB

NEW
TECHNOLOGY

NO DOT
EFFECTS

HIGH
LUMINOSITY

IP20

IP65

ER2528

INDOOR

STRIP LED COB 14W/M

CRI >90

IP20

24 Vdc

45.45 mm

14 W/m

528 Led/m

Chip **COB**

10 mm

5m

2700K – 1460 lm/m	ER2528G02
3000K – 1480 lm/m	ER2528C02
4000K – 1500 lm/m	ER2528N02
6500K – 1550 lm/m	ER2528F02

Supply	24 Vdc
LED number	528 Led/m
Power	14 W/m
Protection Degree	IP20
LED type	COB
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

STRIP LED COB 15W/M

CRI >90

IP20

2700K 1350 lm/m	PSCOBU220G
3000K 1400 lm/m	PSCOBU220C
4000K 1500 lm/m	PSCOBU220N
6500K 1550 lm/m	PSCOBU220F

Supply	24 Vdc
LED number	480 Led/m
Power	15 W/m
Protection Degree	IP20
LED type	COB
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

STRIP LED FREECUT COB 10W/M

CRI >90

IP20

2700K 800 lm/m	PSCOBCU220G
3000K 850 lm/m	PSCOBCU220C
4000K 880 lm/m	PSCOBCU220N
6500K 900 lm/m	PSCOBCU220F

Supply	24 Vdc
LED number	480 Led/m
Power	10 W/m
Protection Degree	IP20
LED type	COB
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

ER2528

OUTDOOR

STRIP LED COB 14W/M

CRI >80

IP65

2700K 1460 lm/m	ER2528G42
3000K 1480 lm/m	ER2528C42
4000K 1500 lm/m	ER2528N42
6500K 1550 lm/m	ER2528F42

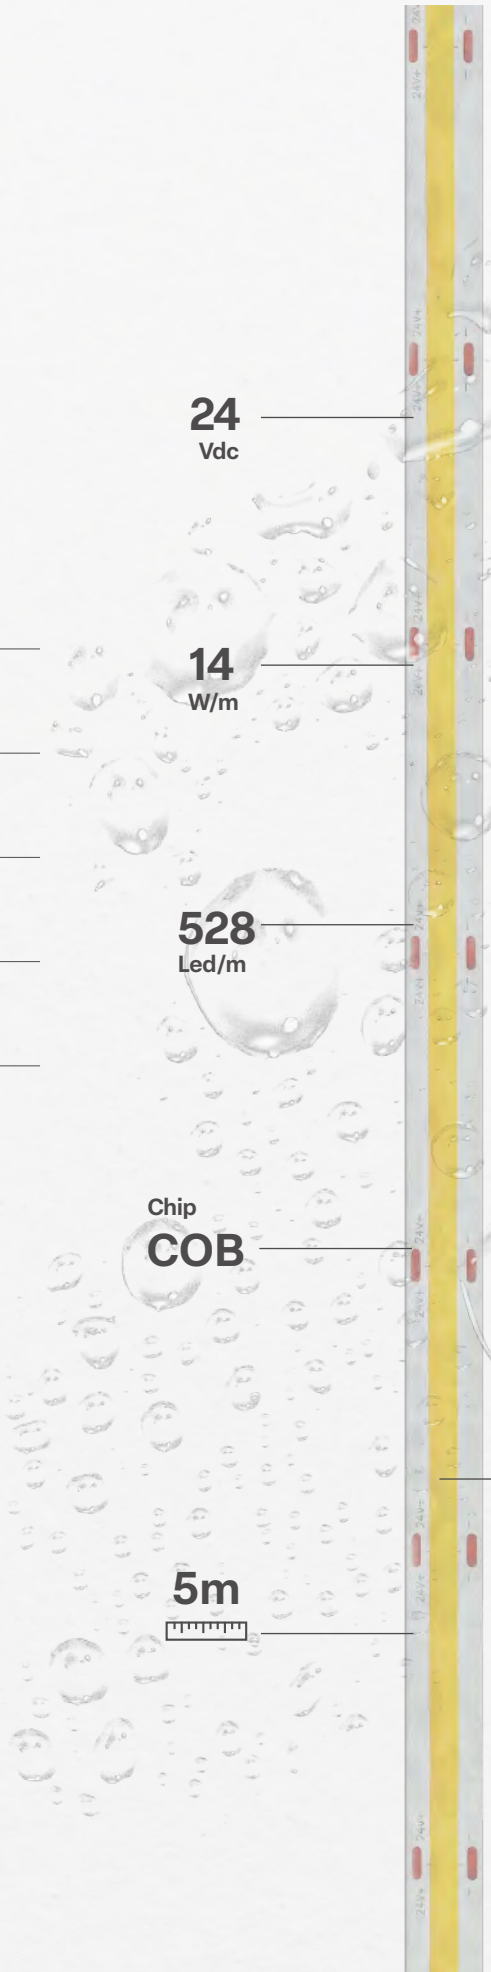

Supply	24 Vdc
LED number	528 Led/m
Power	14 W/m
Protection Degree	IP65
LED type	COB
(CRI)	>80
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

STRIP LED COB 15W/M

CRI >90

IP67

2700K 1350 lm/m	PSCOBU267G
3000K 1400 lm/m	PSCOBU267C
4000K 1500 lm/m	PSCOBU267N
6500K 1550 lm/m	PSCOBU267F

24 Vdc

15 W/m

480 Led/m

Chip COB

5m

50 mm

12 mm

Supply	24 Vdc
LED number	480 Led/m
Power	15 W/m
Protection Degree	IP67
LED type	COB
(CRI)	>90
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

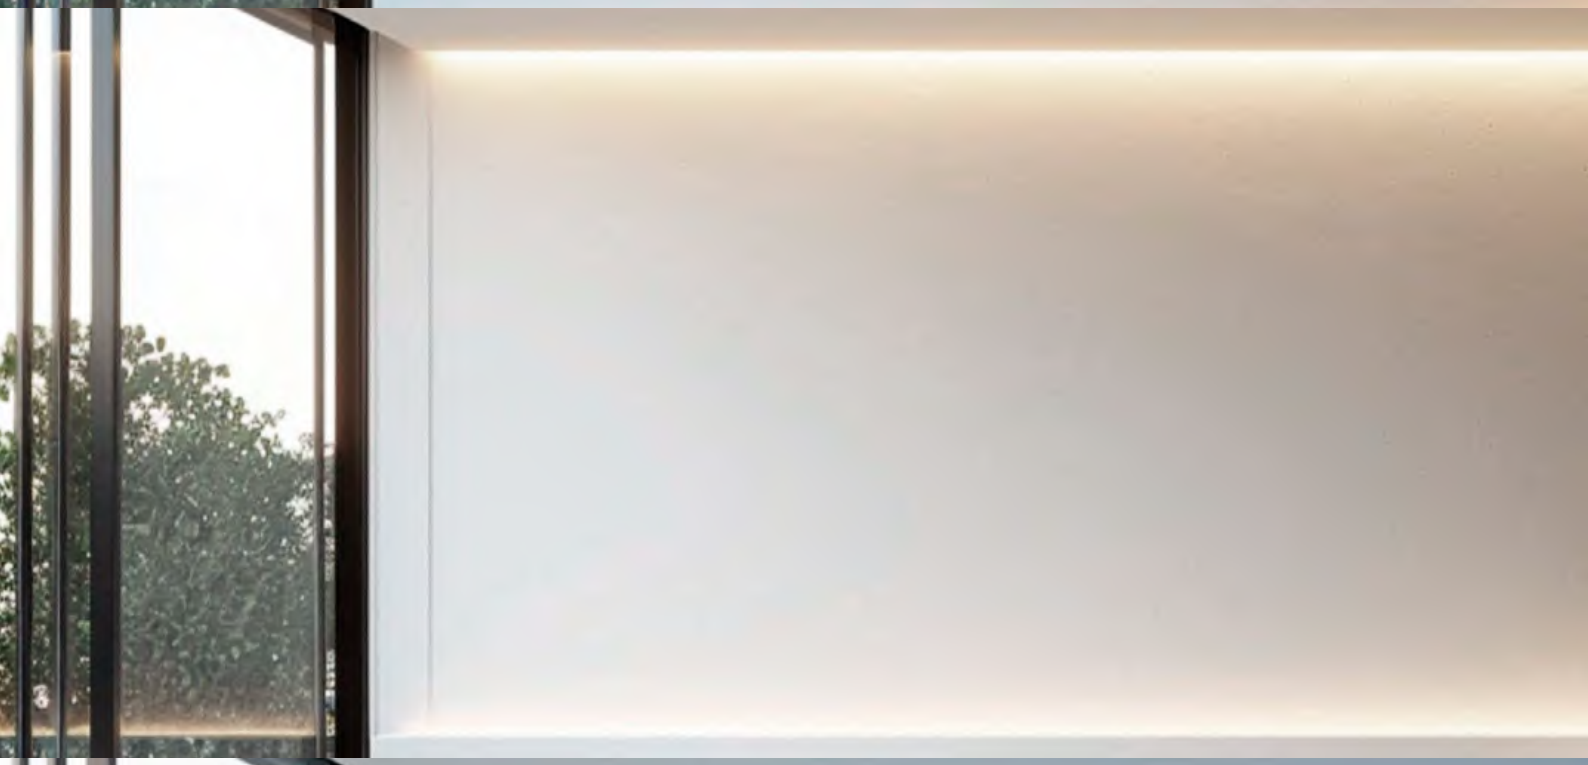

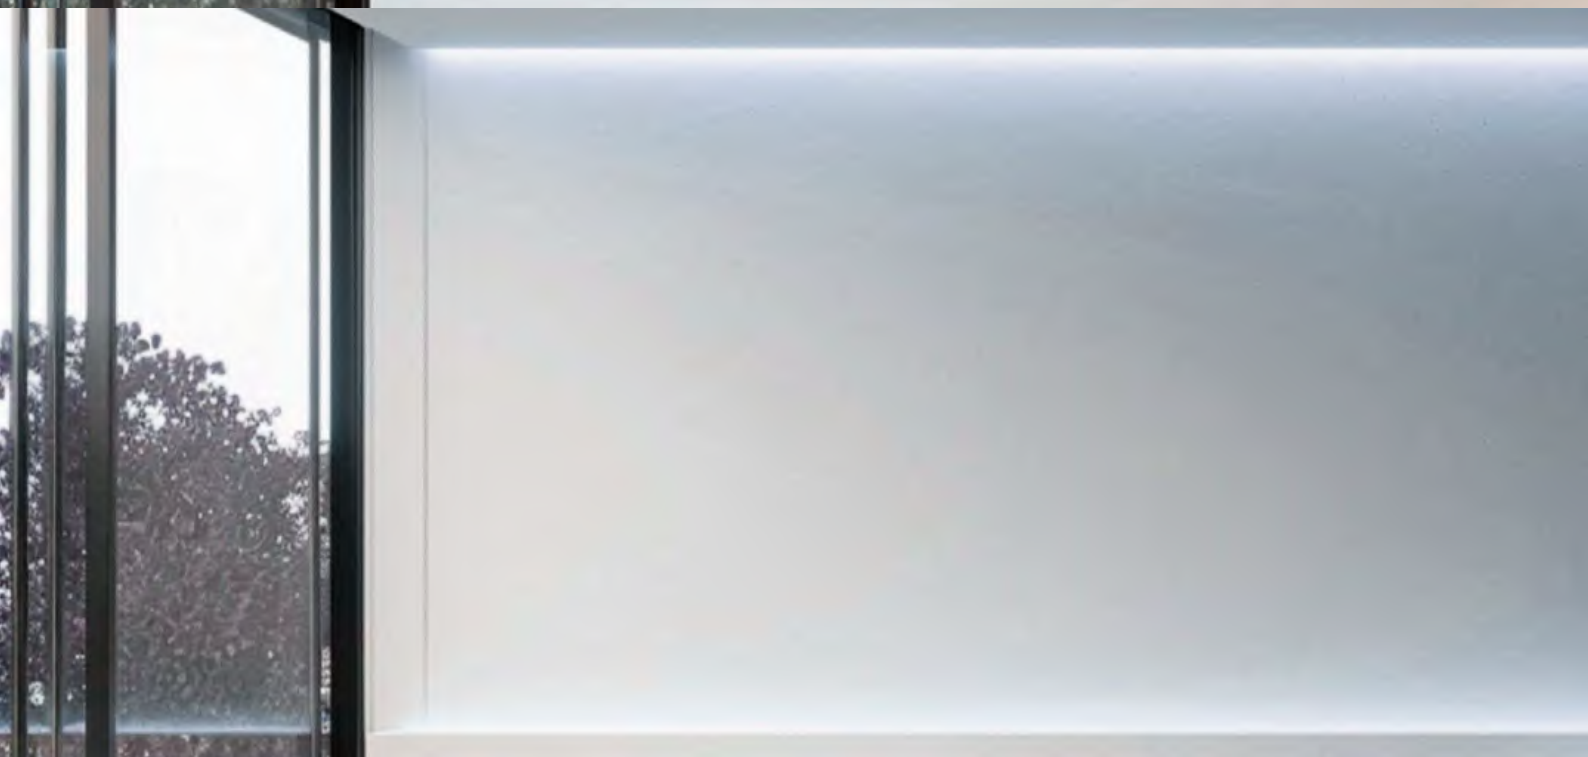

CCT LED STRIP

2700K

4000K

6500K

PS2835M

INDOOR

STRIP LED WHITE CCT 19,2W/M

CRI >94

IP20

CCT		
2700K	2000 lm/m	
4000K	2100 lm/m	PS2835M220K
6500K	2200 lm/m	

Supply	24 Vdc
LED number	240 Led/m
Power	19.2 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>94
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

PS2835M

OUTDOOR

STRIP LED WHITE CCT 19,2W/M

CRI >94

IP65

CCT		
2700K	2000 lm/m	
4000K	2100 lm/m	PS2835M265K
6500K	2200 lm/m	

Supply	24 Vdc
LED number	240 Led/m
Power	19.2 W/m
Protection Degree	IP65
LED type	2835
(CRI)	>94
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

MULTICOLOR

ER1030

INDOOR

STRIP LED 12V MULTICOLOR 14.4W/M

IP20

RGB

ER1030X01

Supply	12 Vdc
LED number	72 Led/m
Power	14.4 W/m
Protection Degree	IP20
LED type	5050
(CRI)	-
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

STRIP LED 24V MULTICOLOR 14.4W/M

IP20

RGB

ER1030X02

24 Vdc

14.4 W/m

72 Led/m

Chip 5050

5m

83,33 mm

10 mm

Supply	24 Vdc
LED number	72 Led/m
Power	14.4 W/m
Protection Degree	IP20
LED type	5050
(CRI)	-
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1030

INDOOR

STRIP LED 12V MULTICOLOR & WHITE 19.2W/M

CRI >80

IP20

RGBW

3000K, 880 lm/m	ER1030W01
4000K, 900 lm/m	ER1030L01

Supply	12 Vdc
LED number	72 Led/m
Power	19.2 W/m
Protection Degree	IP20
LED type	5050
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1030

INDOOR

STRIP LED 24V MULTICOLOR & WHITE 19.2W/M

CRI >80

IP20

RGBW

3000K, 880 lm/m	ER1030W02
4000K, 900 lm/m	ER1030L02



24 Vdc

19.2 W/m

72 Led/m

Chip 5050

5m

41,66 mm

12 mm

Supply	24 Vdc
LED number	72 Led/m
Power	19.2 W/m
Protection Degree	IP20
LED type	5050
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

PS5050D

INDOOR

STRIP LED MULTICOLOR & WHITE 23W/M

CRI >90

IP20

RGBW

3000K	1100 lm/m	PS5050D220W
4000K	1200 lm/m	PS5050D220L

Supply	24 Vdc
LED number	96 Led/m
Power	23 W/m
Protection Degree	IP20
LED type	5050
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

ER2769

INDOOR

STRIP LED COB MULTICOLOR 14W/M

IP20

RGB

ER2769X02

24 Vdc

14 W/m

768 Led/m

31.25 mm

Chip **COB**

10 mm

5m

Supply	24 Vdc
LED number	768 Led/m
Power	14 W/m
Protection Degree	IP20
LED type	COB
(CRI)	-
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

ER2784

INDOOR

STRIP LED COB MULTICOLOR & WHITE 18W/M

CRI >90

IP20

RGBW 3000K

450 lm/m

ER2784W02

Supply	24 Vdc
LED number	784 Led/m
Power	18 W/m
Protection Degree	IP20
LED type	COB
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

ER2840

INDOOR

STRIP LED COB MULTICOLOR & WHITE CCT 21W/M

CRI >90

IP20

RGBW

CCT		
3000K	350 lm/m	
4000K	680 lm/m	ER2840XK02
6500K	370 lm/m	

Supply	24 Vdc
LED number	840 Led/m
Power	21 W/m
Protection Degree	IP20
LED type	COB
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

ER1030

OUTDOOR

STRIP LED 12V MULTICOLOR 14.4W/M

IP65

RGB

ER1030X41

Supply	12 Vdc
LED number	60 Led/m
Power	14.4 W/m
Protection Degree	IP65
LED type	5050
(CRI)	-
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1030

OUTDOOR

STRIP LED 24V MULTICOLOR 14.4W/M

IP65

RGB

ER1030X42

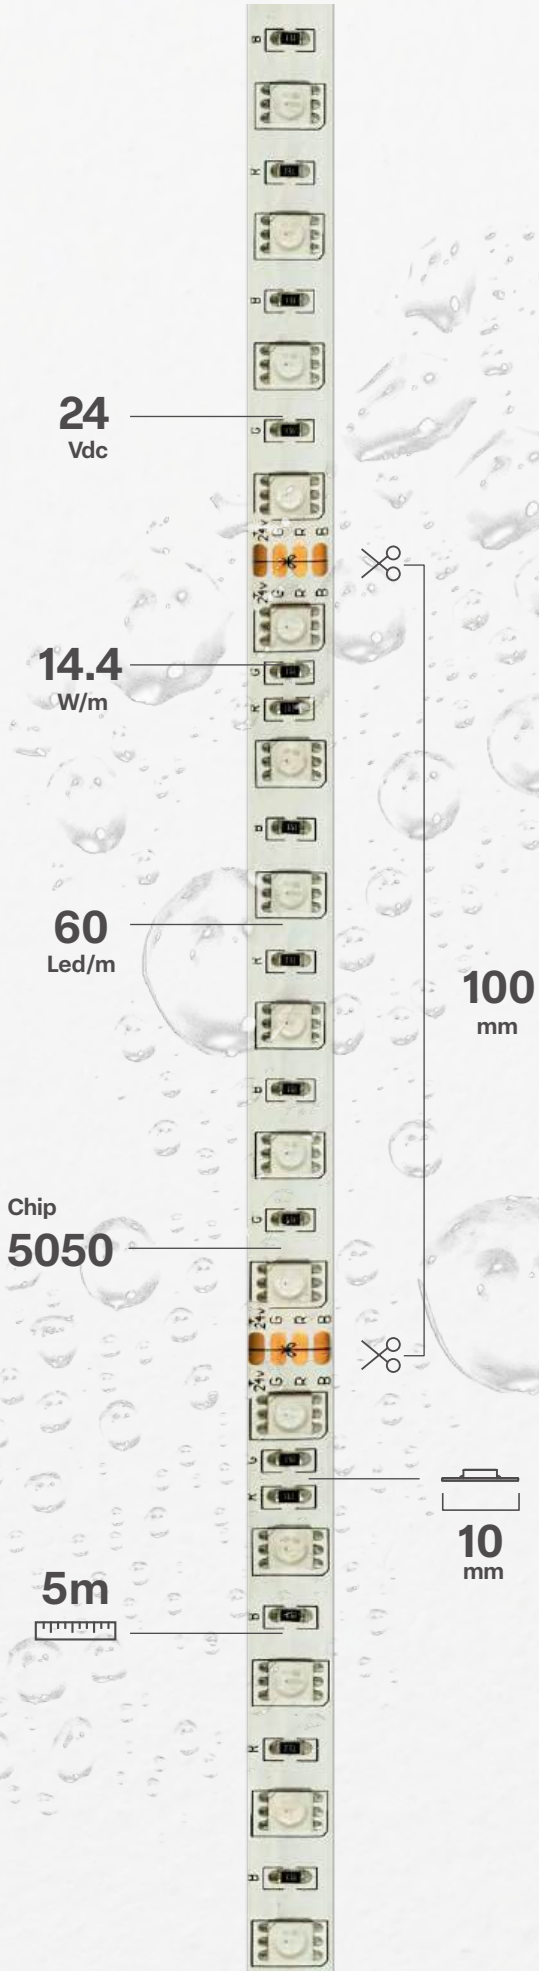

Supply	24 Vdc
LED number	60 Led/m
Power	14.4 W/m
Protection Degree	IP65
LED type	5050
(CRI)	-
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

STRIP LED 12V MULTICOLOR & WHITE 19.2W/M

CRI >80

IP65

RGBW	3000K 880 lm/m	ER1030W41
	4000K 900 lm/m	ER1030L41

Supply	12 Vdc
LED number	60 Led/m
Power	19.2 W/m
Protection Degree	IP65
LED type	5050
(CRI)	>80
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

ER1030

OUTDOOR

STRIP LED 24V MULTICOLOR & WHITE 19.2W/M

CRI >80

IP65

RGBW	3000K 880 lm/m	ER1030W42
	4000K 900 lm/m	ER1030L42

Supply	24 Vdc
LED number	60 Led/m
Power	19.2 W/m
Protection Degree	IP65
LED type	5050
(CRI)	>80
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	5 m

PS5050D

OUTDOOR

STRIP LED MULTICOLOR & WHITE 19.2W/M

CRI >90

IP67

RGBW	3000K 1100 lm/m	PS5050D267W
	4000K 1200 lm/m	PS5050D267L

Supply	24 Vdc
LED number	96 Led/m
Power	19.2 W/m
Protection Degree	IP67
LED type	5050
(CRI)	>90
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

ER2769

OUTDOOR

STRIP LED COB MULTICOLOR 14W/M

IP68

RGB

ER2769X42

24 Vdc

14 W/m

31.25 mm

768 Led/m

Chip **COB**

12 mm

5m

Supply	24 Vdc
LED number	768 Led/m
Power	14 W/m
Protection Degree	IP68
LED type	COB
(CRI)	-
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

ER2784

OUTDOOR

STRIP LED COB MULTICOLOR & WHITE 18W/M

CRI >90

IP68

RGBW 3000K

450 lm/m

ER2784W42

24 Vdc

18 W/m

784 Led/m

71.42 mm

Chip **COB**

14 mm

5m

Supply	24 Vdc
LED number	784 Led/m
Power	18 W/m
Protection Degree	IP68
LED type	COB
(CRI)	>90
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

ER2840

OUTDOOR

STRIP LED COB MULTICOLOR & WHITE CCT 21W/M

CRI >90

IP68

RGBW

CCT		
3000K	350 lm/m	
4000K	680 lm/m	
6500K	370 lm/m	

ER2840XK42

Supply	24 Vdc
LED number	840 Led/m
Power	21 W/m
Protection Degree	IP68
LED type	COB
(CRI)	>90
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

RUNNING
DYNAMIC SCENE
ADDRESS MODE

DIGITAL STRIP LED

ER2720

STRIP LED DIGITAL COB MULTICOLOR 21W/M

IP20

DIGITAL

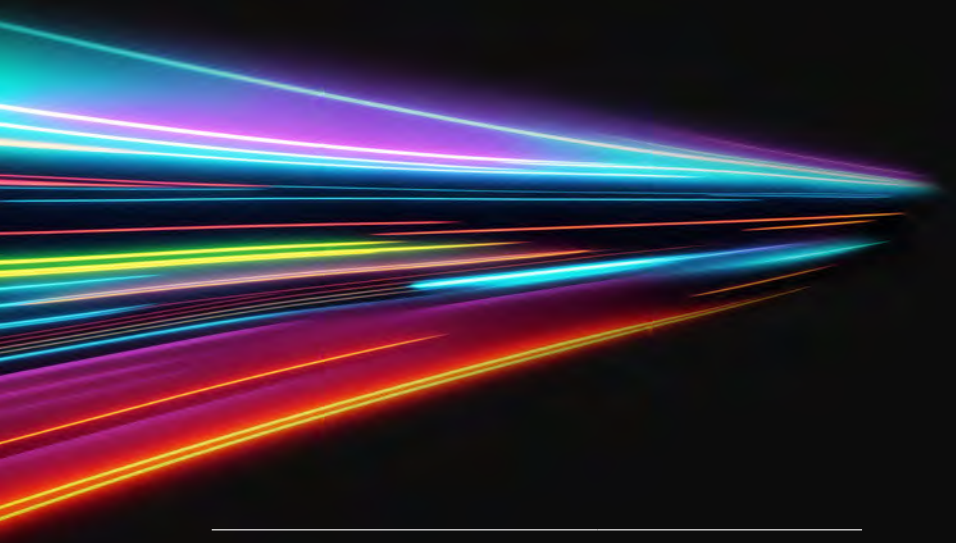

RGB

ER2720XZ02

24 Vdc

21 W/m

720 Led/m

Chip COB

5m

50 mm

36 IC/m

12 mm

Supply	24 Vdc
LED number	720 Led/m
Power	21 W/m
Protection Degree	IP20
LED type	COB
(CRI)	-
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m
Chip IC	2811F (36 IC/m)

ER2784

INDOOR

STRIP LED DIGITAL COB MULTICOLOR & WHITE 18W/M

CRI >90

IP20

DIGITAL

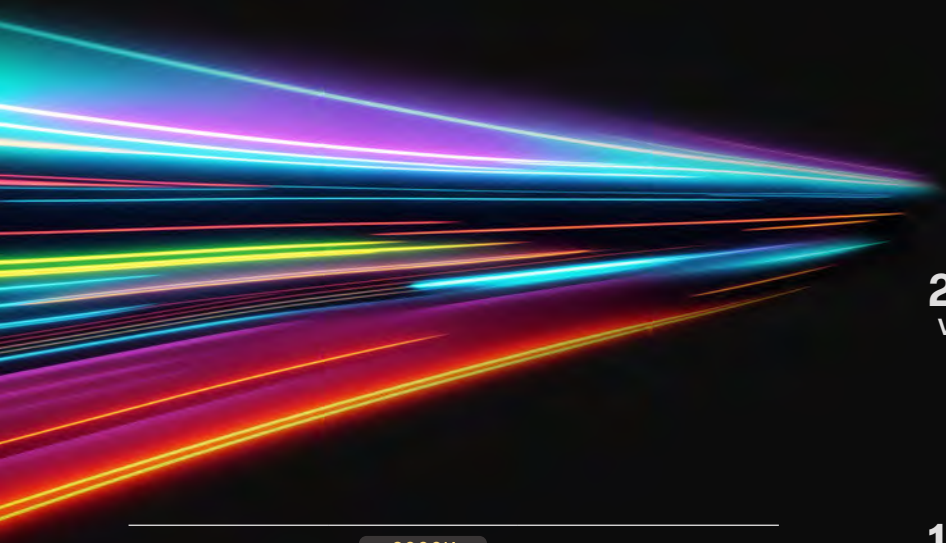

RGBW	3000K, 450 lm/m	ER2784WZ02
	4000K, 470 lm/m	ER2784WL02

24 Vdc

18 W/m

784 Led/m

Chip COB

5m

71.42 mm

49 IC/m

10 mm

Supply	24 Vdc
LED number	784 Led/m
Power	18 W/m
Protection Degree	IP20
LED type	COB
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m
Chip IC	WS2814 (49 IC/m)

ER2720

OUTDOOR

STRIP LED DIGITAL COB MULTICOLOR 21W/M

IP67 DIGITAL

RGB

ER2720XZ42

Supply	24 Vdc
LED number	720 Led/m
Power	21 W/m
Protection Degree	IP67
LED type	COB
(CRI)	-
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m
Chip IC	2811F (36 IC/m)

ER2784

OUTDOOR

STRIP LED DIGITAL COB MULTICOLOR & WHITE 18W/M

CRI >90

IP67

DIGITAL

RGBW	3000K 450 lm/m	ER2784WZ42
	4000K 470 lm/m	ER2784WL42

Supply	24 Vdc
LED number	784 Led/m
Power	18 W/m
Protection Degree	IP67
LED type	COB
(CRI)	>90
Cover	Silicone
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m
Chip IC	WS2814 (49 IC/m)

WALLWASHER

STRIP LED WALLWASHER WHITE CCT

CRI >90

IP67

CCT		
2700K	1700 lm/m	PS2835HA267K
4000K	1750 lm/m	
6500K	1800 lm/m	

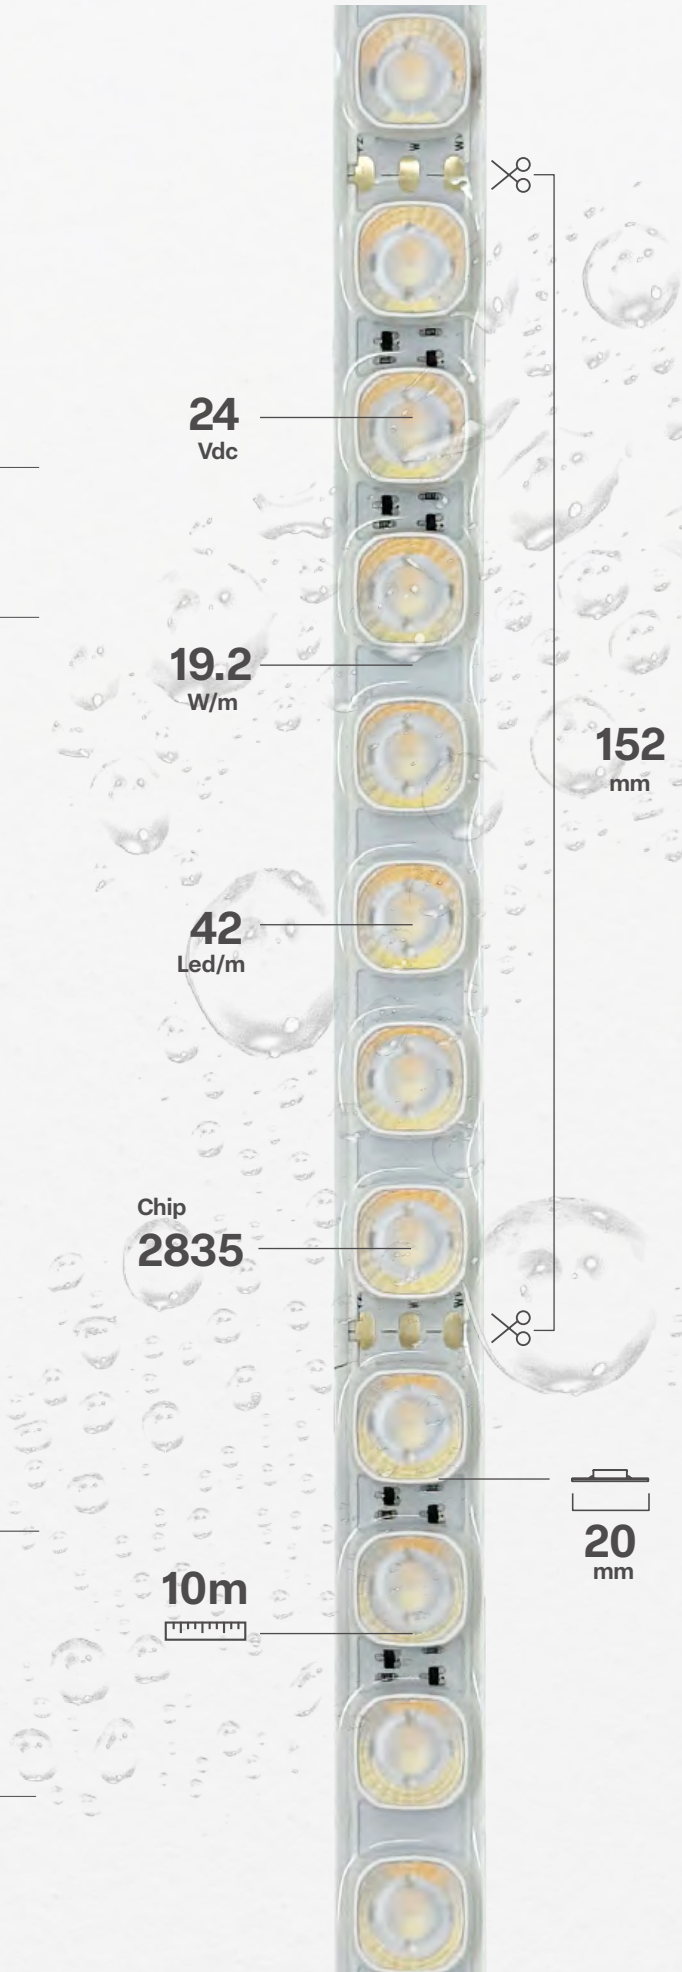

Supply	24 Vdc
LED number	42 Led/m
Power	19.2 W/m
Protection Degree	IP67
LED type	2835
(CRI)	>90
Cover	Flex Silicone
Light angle	35 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

ACCESSORIES

IP67 CABLE FOR WWASH CCT HEAD + FREE WIRES CONNECTION	PS2835ACC01
IP67 CABLE FOR WWASH CCT JUMPER WITH CONNECTION CABLE	PS2835ACC02
IP67 CLIP FOR WWASH CCT FIXING IN METAL SCREW HOLE	PS2835ACLIP

PS3535

SPECIAL

STRIP LED WALLWASHER MULTICOLOR & WHITE

CRI >90

IP67

RGBW	3000K 1000 lm/m	PS3535HA267W
	4000K 1100 lm/m	PS3535HA267L
	6000K 1050 lm/m	PS3535HA267J

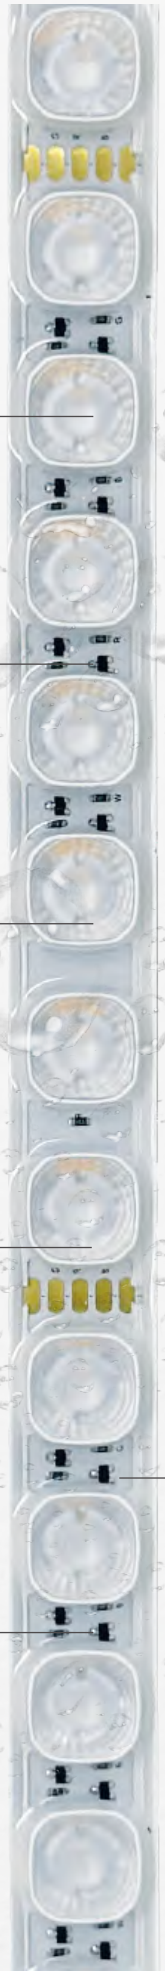

Supply	24 Vdc
LED number	42 Led/m
Power	19.2 W/m
Protection Degree	IP67
LED type	3535
(CRI)	>90
Cover	Flex Silicone
Light angle	35 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

ACCESSORIES

IP67 CABLE FOR WWASH RGBW HEAD + FREE WIRES CONNECTION	PS3535ACC01
IP67 CABLE FOR WWASH RGBW JUMPER WITH CONNECTION CABLE	PS3535ACC02
IP67 CLIP FOR FIXING WWASH RGBW IN METAL SCREW HOLE	PS3535ACLIP

2200K
DIM TO WARM
3000K

STRIP LED DIM TO WARM 10W/M

CRI >90

IP20

CCT		
2200K	820 lm/m	
2700K	840 lm/m	PSCOBD220I
3000K	860 lm/m	

Supply	24 Vdc
LED number	480 Led/m
Power	10 W/m
Protection Degree	IP20
LED type	COB
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

FOOD STRIP

PS2535FE

SPECIAL

STRIP LED FOOD

CRI >90

IP20

2500K 1596 lm/m		PS2535FE220Q
2900K 1646 lm/m		PS2535FE220M
3000K 1646 lm/m		PS2535FE220H
5000K 1764 lm/m		PS2535FE220V
7500K 1680 lm/m		PS2535FE220P

Supply	24 Vdc
LED number	112 Led/m
Power	16.8 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>90
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

BANK

PS2835BG

SPECIAL

STRIP LED “S”

CRI >80

IP20

3000K 1200 lm/m	PS2835BG220C
4000K 1270 lm/m	PS2835BG220N
6500K 1300 lm/m	PS2835BG220F

Supply	24 Vdc
LED number	120 Led/m
Power	12 W/m
Protection Degree	IP20
LED type	2835
(CRI)	>80
Cover	No
Light angle	120 °
Connection	Free wires
Fixing	Adhesive 3M
Dimmable	Via controller
Max length in cascade	10 m

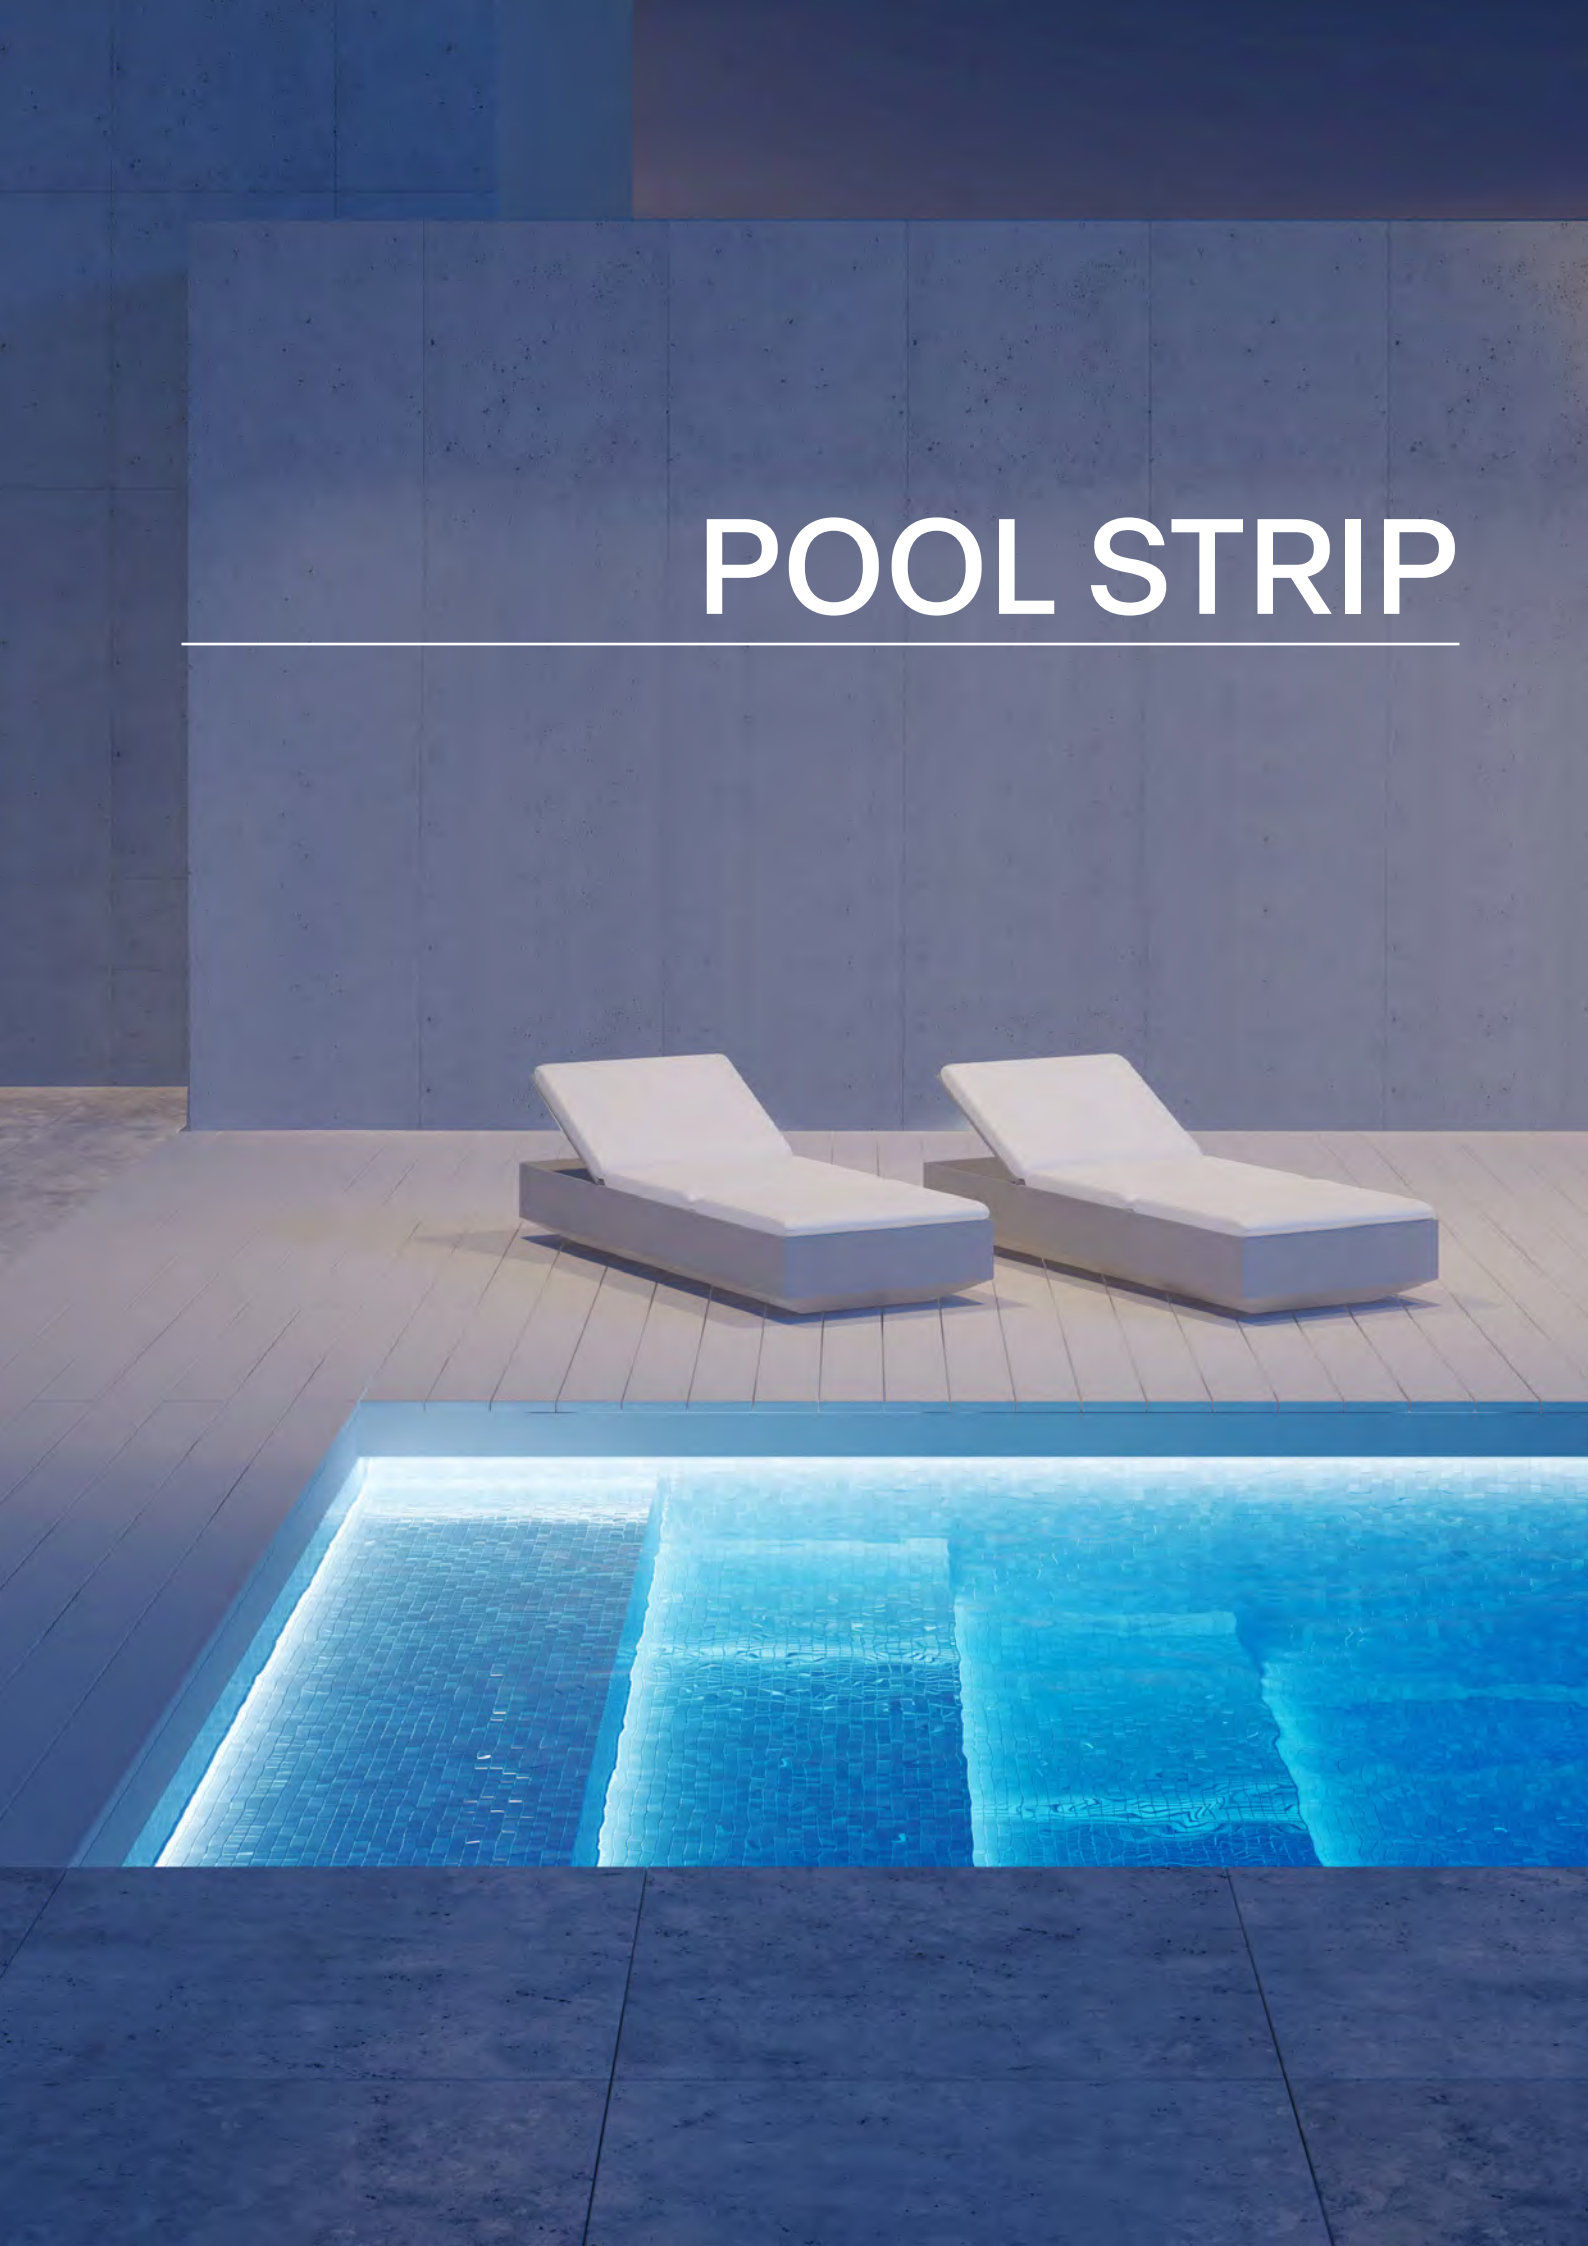

POOL STRIP

N2216T

POOL TOP LIGHT

Supply	24 Vdc
LED number	240 Led/m
Power	9.6 W/m
Lumen Source	1000 lm/m
Protection Degree	IP68
LED type	2835
(CRI)	>80
Cover	Flex Silicone
Light angle	120 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	20 m

2700K	10 m	N2216T268G10
850 lm/m	20 m	N2216T268G20
3000K	10 m	N2216T268C10
880 lm/m	20 m	N2216T268C20
4000K	10 m	N2216T268N10
900 lm/m	20 m	N2216T268N20

ACCESSORIES

IP68 CLIP FOR FIXING NEON TOP POOL IN PLASTIC SCREW HOLE	N2216ACC01

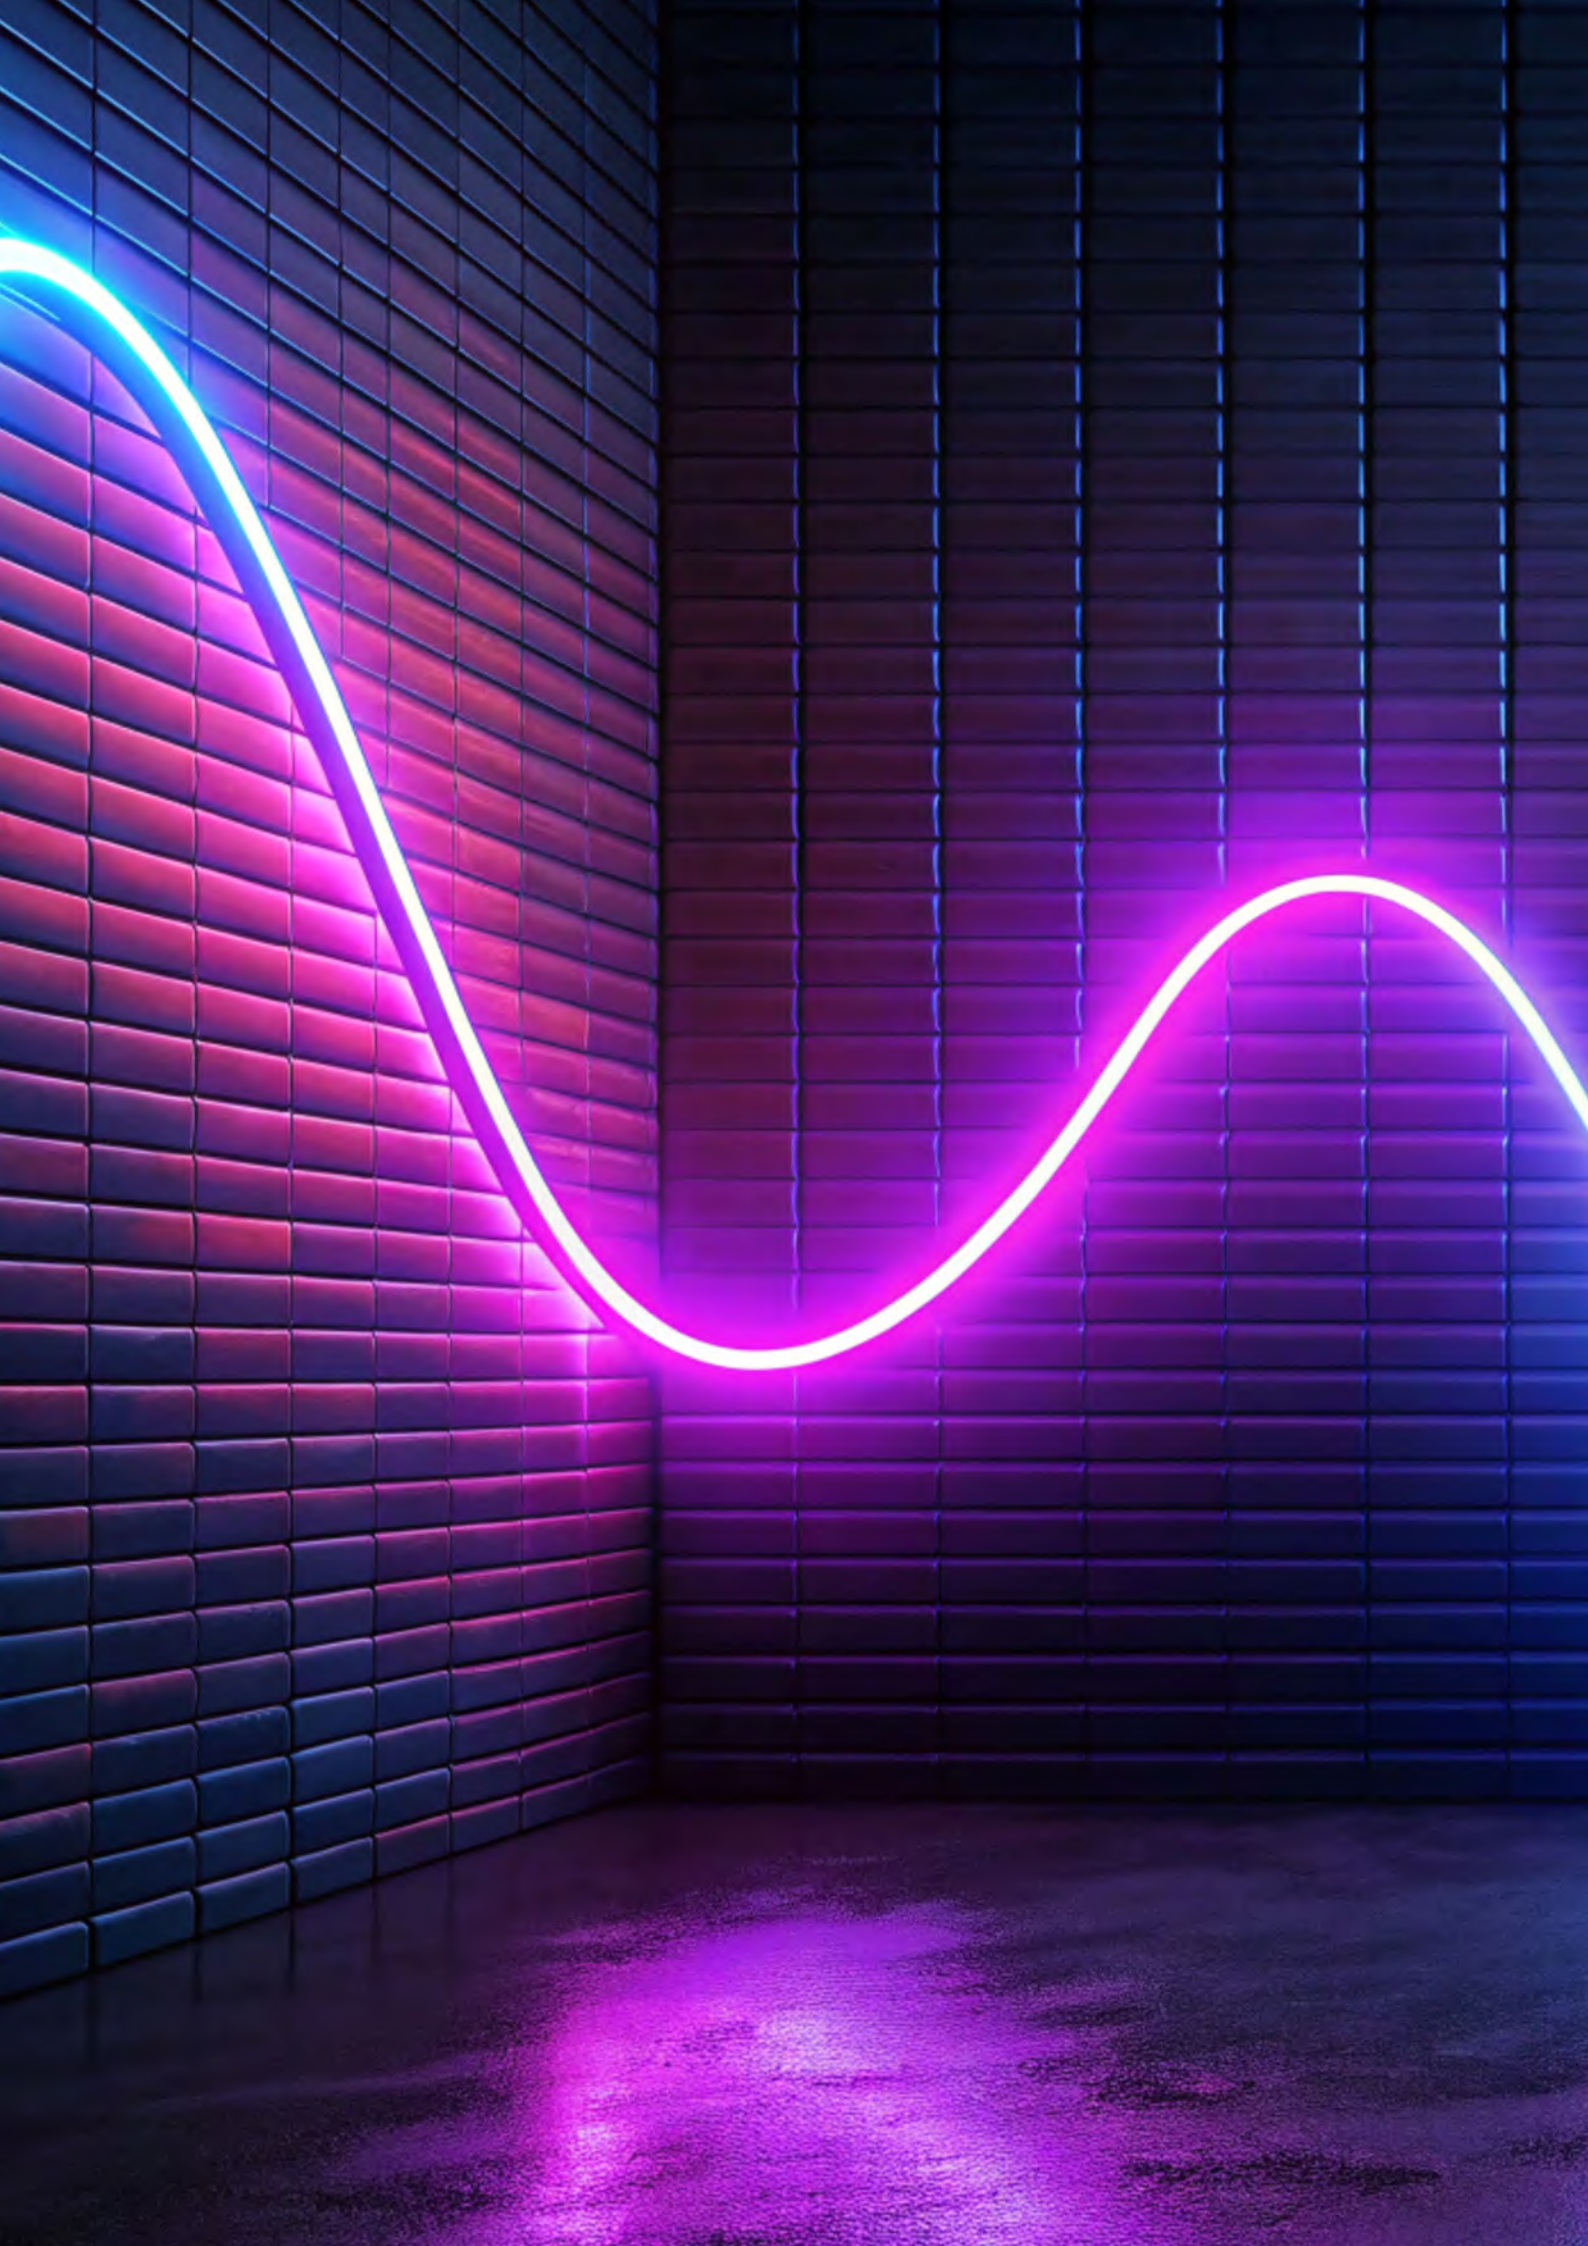

NEON LED

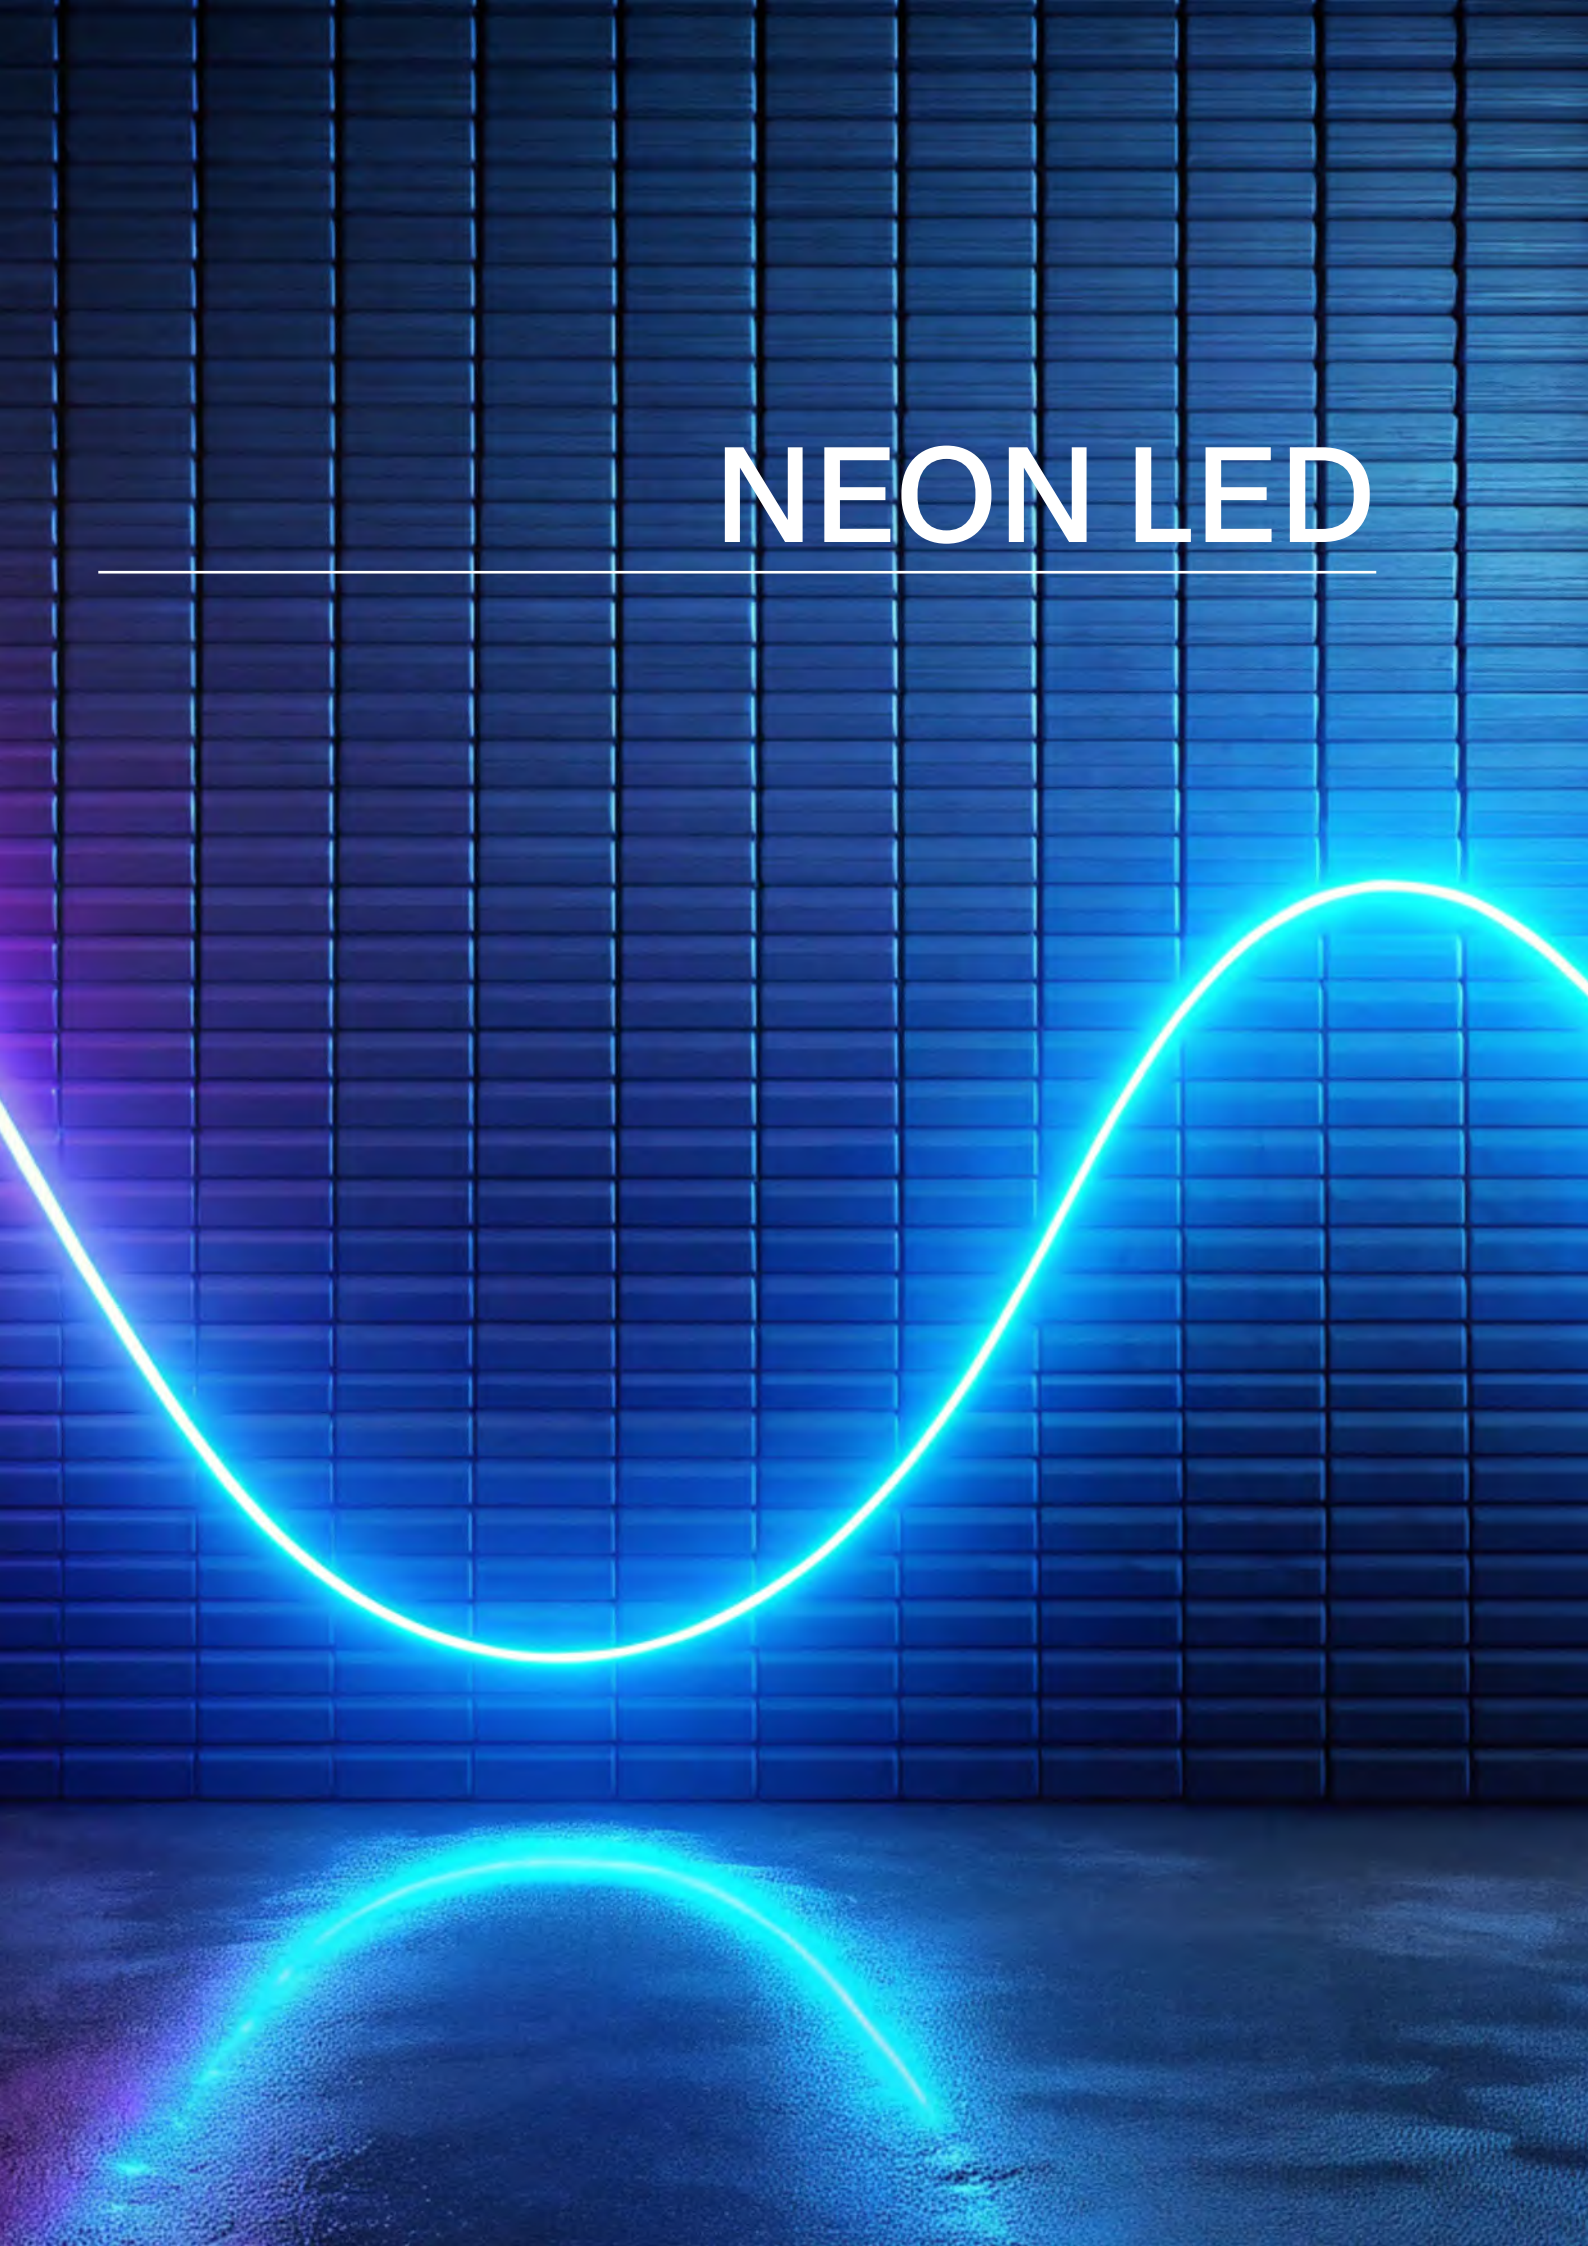

PSD25C

NEON LED

ROUND LIGHT FREE CUT

CRI >90 | IP67 | ROUND | FREE CUT

25 mm

2700K / 900 lm/m	5 m	PSD25CI267G
3000K / 975 lm/m	5 m	PSD25CI267C
4000K / 1050 lm/m	5 m	PSD25CI267N

Supply	24 Vdc
LED number	160 Led/m
Power	15 W/m
Lumen Source	1500 lm/m
Protection Degree	IP67
LED type	2835
(CRI)	>90
Cover	Flex Silicone
Light angle	360 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	5 m

ACCESSORIES

CLIP AND CLOSING CAP FOR ROUND VIEW - Ø 25	PSD25ACC001

D16

ROUND LIGHT

CRI >80 | IP67 | ROUND | NO CUT

16 mm

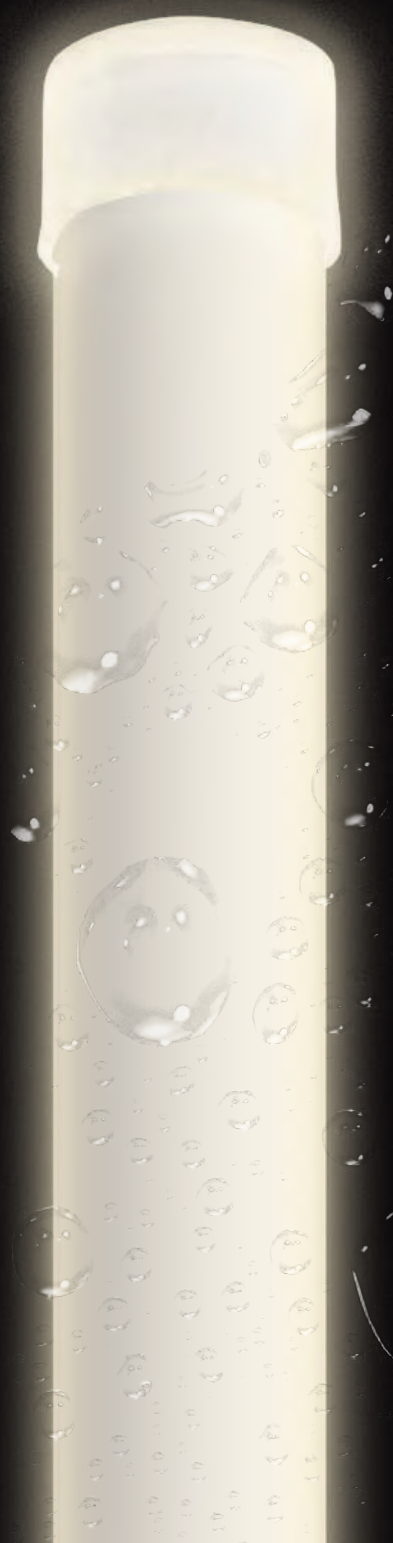

3000K, 1200 lm/m	5 m	D16C05
	10 m	D16C10
	20 m	D16C20
4000K, 1240 lm/m	5 m	D16N05
	10 m	D16N10
	20 m	D16N20
6000K, 1260 lm/m	5 m	D16F05
	10 m	D16F10
	20 m	D16F20

Supply	24 Vdc
LED number	240 Led/m
Power	22 W/m
Lumen Source	2200 lm/m
Protection Degree	IP67
LED type	2835
(CRI)	>80
Cover	Flex Silicone
Light angle	360 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	20 m

ACCESSORIES

CLIP AND CLOSING CAP FOR ROUND VIEW - Ø 16	D16ACC001

D18

ROUND LIGHT

NEON LED

CRI >80 | IP67 | ROUND | NO CUT

18 mm

3000K – 1200 lm/m	5 m	D18C05
	10 m	D18C10
	20 m	D18C20
4000K – 1240 lm/m	5 m	D18N05
	10 m	D18N10
	20 m	D18N20
6000K – 1260 lm/m	5 m	D18F05
	10 m	D18F10
	20 m	D18F20

Supply	24 Vdc
LED number	240 Led/m
Power	20 W/m
Lumen Source	2200 lm/m
Protection Degree	IP67
LED type	2835
(CRI)	>80
Cover	Flex Silicone
Light angle	360 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	20 m

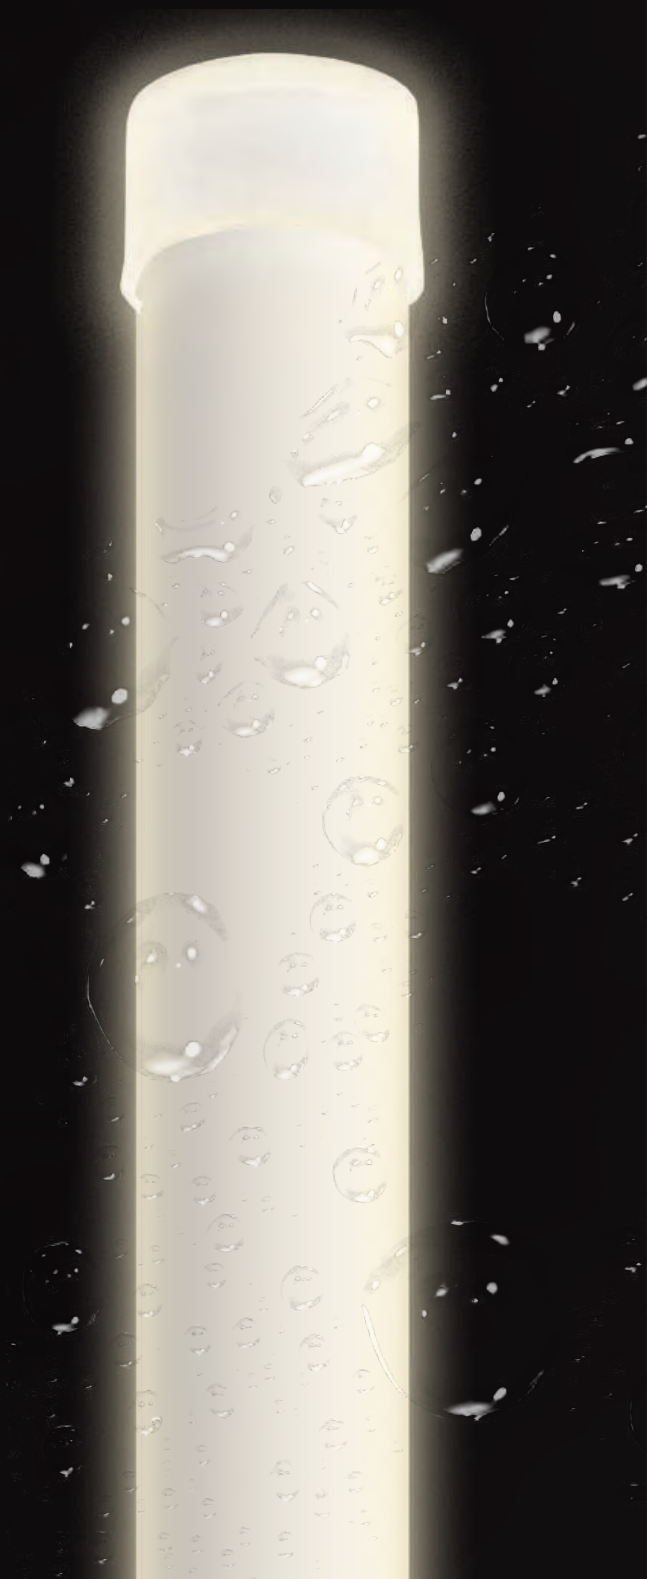

ACCESSORIES

CLIP AND CLOSING CAP FOR ROUND VIEW - Ø 16	D18ACC001

D25

NEON LED

ROUND LIGHT

CRI >80 | IP67 | ROUND | NO CUT

25 mm

3000K – 1000 lm/m	5 m	D25C05
	10 m	D25C10
	20 m	D25C20
4000K – 1040 lm/m	5 m	D25N05
	10 m	D25N10
	20 m	D25N20
6000K – 1060 lm/m	5 m	D25F05
	10 m	D25F10
	20 m	D25F20

Supply	24 Vdc
LED number	240 Led/m
Power	20 W/m
Lumen Source	2200 lm/m
Protection Degree	IP67
LED type	2835
(CRI)	>80
Cover	Flex Silicone
Light angle	360 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	20 m

ACCESSORIES

CLIP AND CLOSING CAP FOR ROUND VIEW - Ø 25	D25ACC001

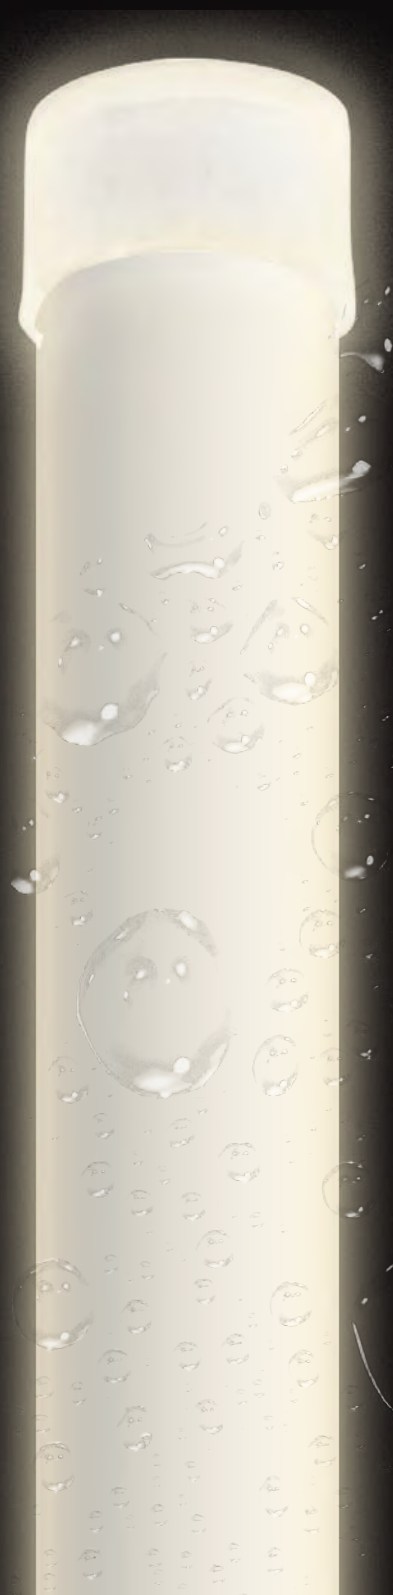

D30

ROUND LIGHT

CRI >80 | IP67 | ROUND | NO CUT

30 mm

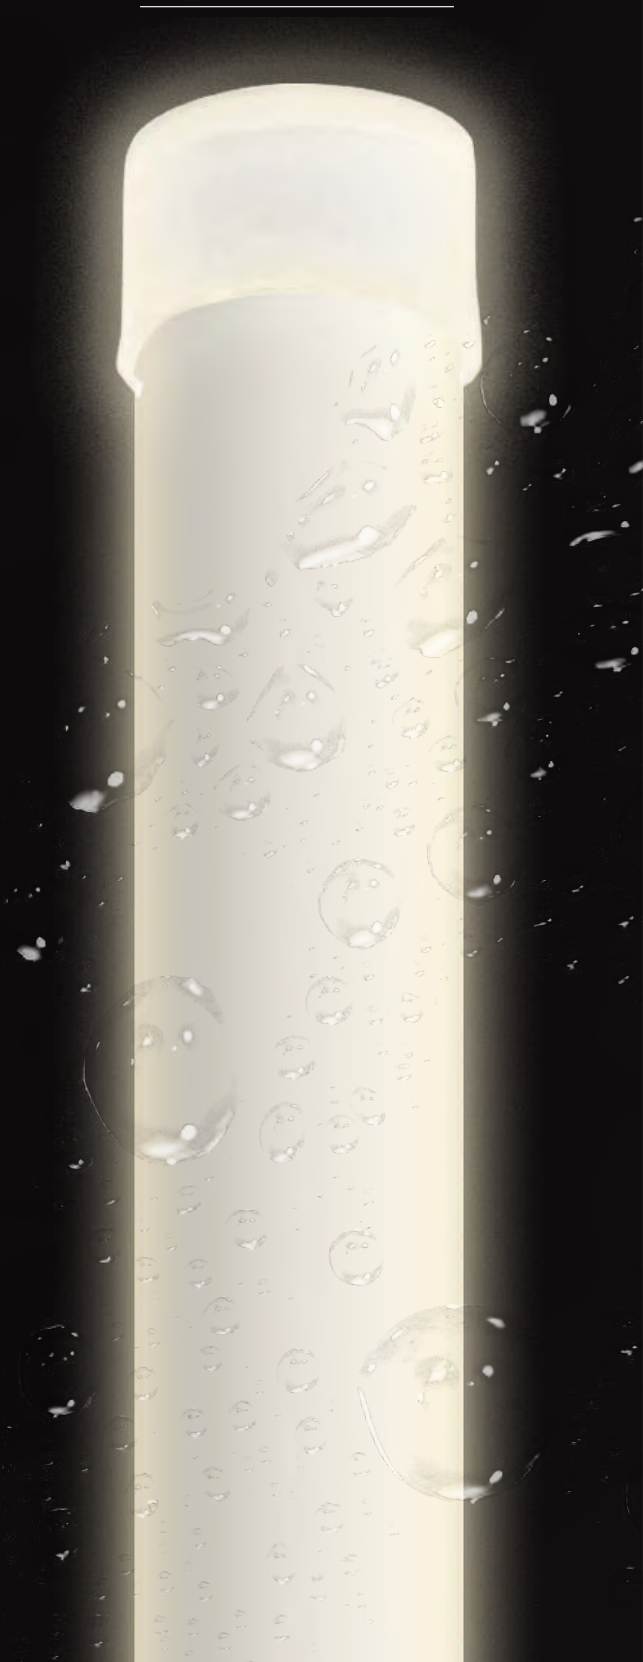

3000K – 1000 lm/m	5 m	D30C05
	10 m	D30C10
	20 m	D30C20
4000K – 1040 lm/m	5 m	D30N05
	10 m	D30N10
	20 m	D30N20
6000K – 1060 lm/m	5 m	D30F05
	10 m	D30F10
	20 m	D30F20

Supply	24 Vdc
LED number	240 Led/m
Power	20 W/m
Lumen Source	2200 lm/m
Protection Degree	IP67
LED type	2835
(CRI)	>80
Cover	Flex Silicone
Light angle	360 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	20 m

ACCESSORIES

CLIP AND CLOSING CAP FOR ROUND VIEW - Ø 30	D30ACC001

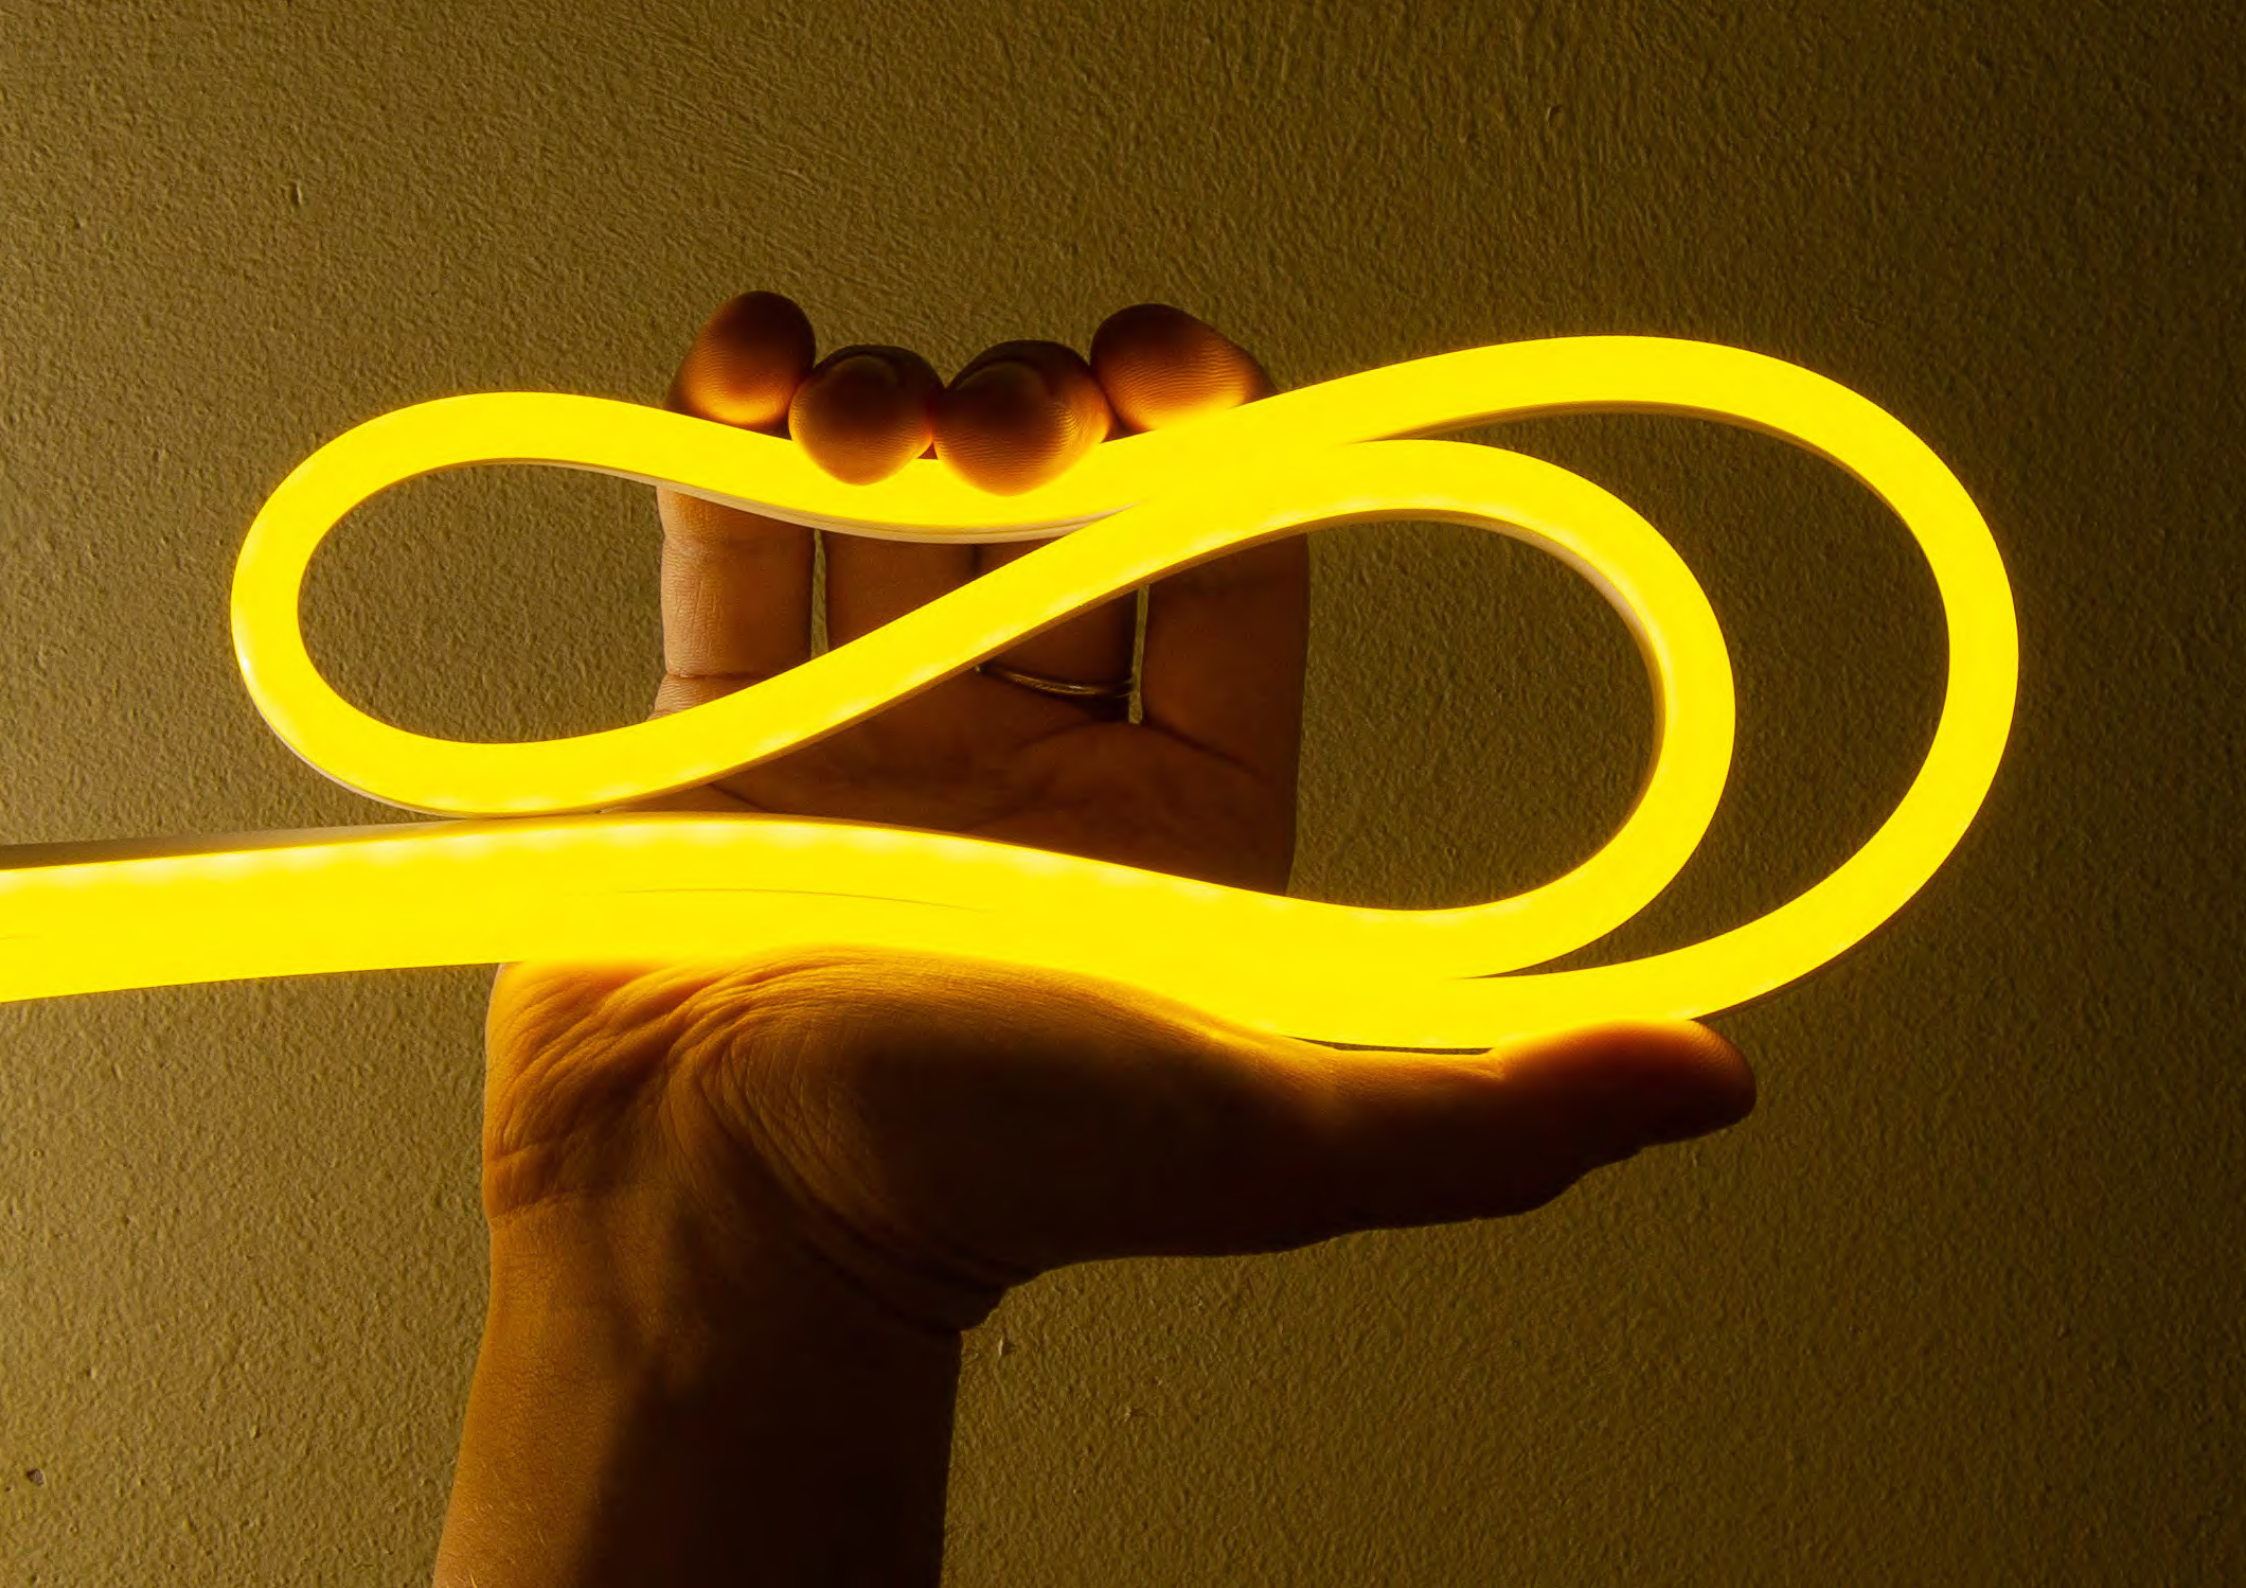

T0410SL

SIDE LIGHT

CRI >80

IP67

SIDE

3000K 200 lm/m	5 m	T0410SLC05
	10 m	T0410SLC10
	20 m	T0410SLC20
	50 m	T0410SLC50
4000K 220 lm/m	5 m	T0410SLN05
	10 m	T0410SLN10
	20 m	T0410SLN20
	50 m	T0410SLN50
6000K 240 lm/m	5 m	T0410SLF05
	10 m	T0410SLF10
	20 m	T0410SLF20
	50 m	T0410SLF50

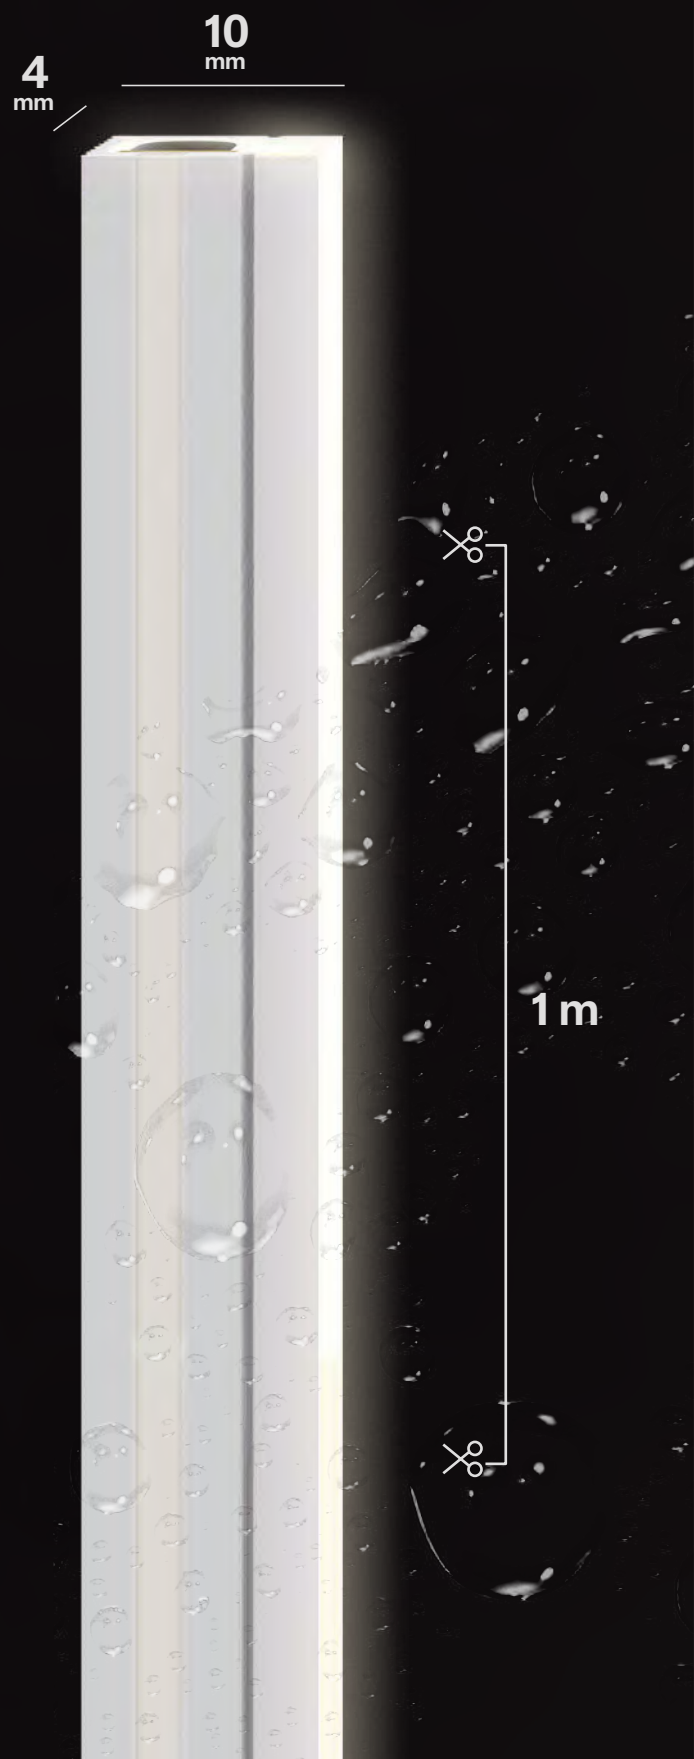

Supply	24 Vdc
LED number	120 Led/m
Power	9.6 W/m
Lumen Source	1000 lm/m
Protection Degree	IP67
LED type	2835
(CRI)	>80
Cover	Flex Silicone
Light angle	120 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	50 m

ACCESSORIES

CLIP AND CLOSING CAP FOR SIDE VIEW - 4x10	T0410SLACC01

T0612SL

SIDE LIGHT

CRI >80

IP67

SIDE

3000K 230 lm/m	5 m	T0612SLC05
	10 m	T0612SLC10
	20 m	T0612SLC20
	50 m	T0612SLC50
4000K 250 lm/m	5 m	T0612SLN05
	10 m	T0612SLN10
	20 m	T0612SLN20
	50 m	T0612SLN50
6000K 270 lm/m	5 m	T0612SLF05
	10 m	T0612SLF10
	20 m	T0612SLF20
	50 m	T0612SLF50

Supply	24 Vdc
LED number	120 Led/m
Power	12 W/m
Lumen Source	1000 lm/m
Protection Degree	IP67
LED type	2835
(CRI)	>80
Cover	Flex Silicone
Light angle	120 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	50 m

ACCESSORIES

CLIP AND CLOSING CAP FOR SIDE VIEW - 4x10	T0612SLACC01

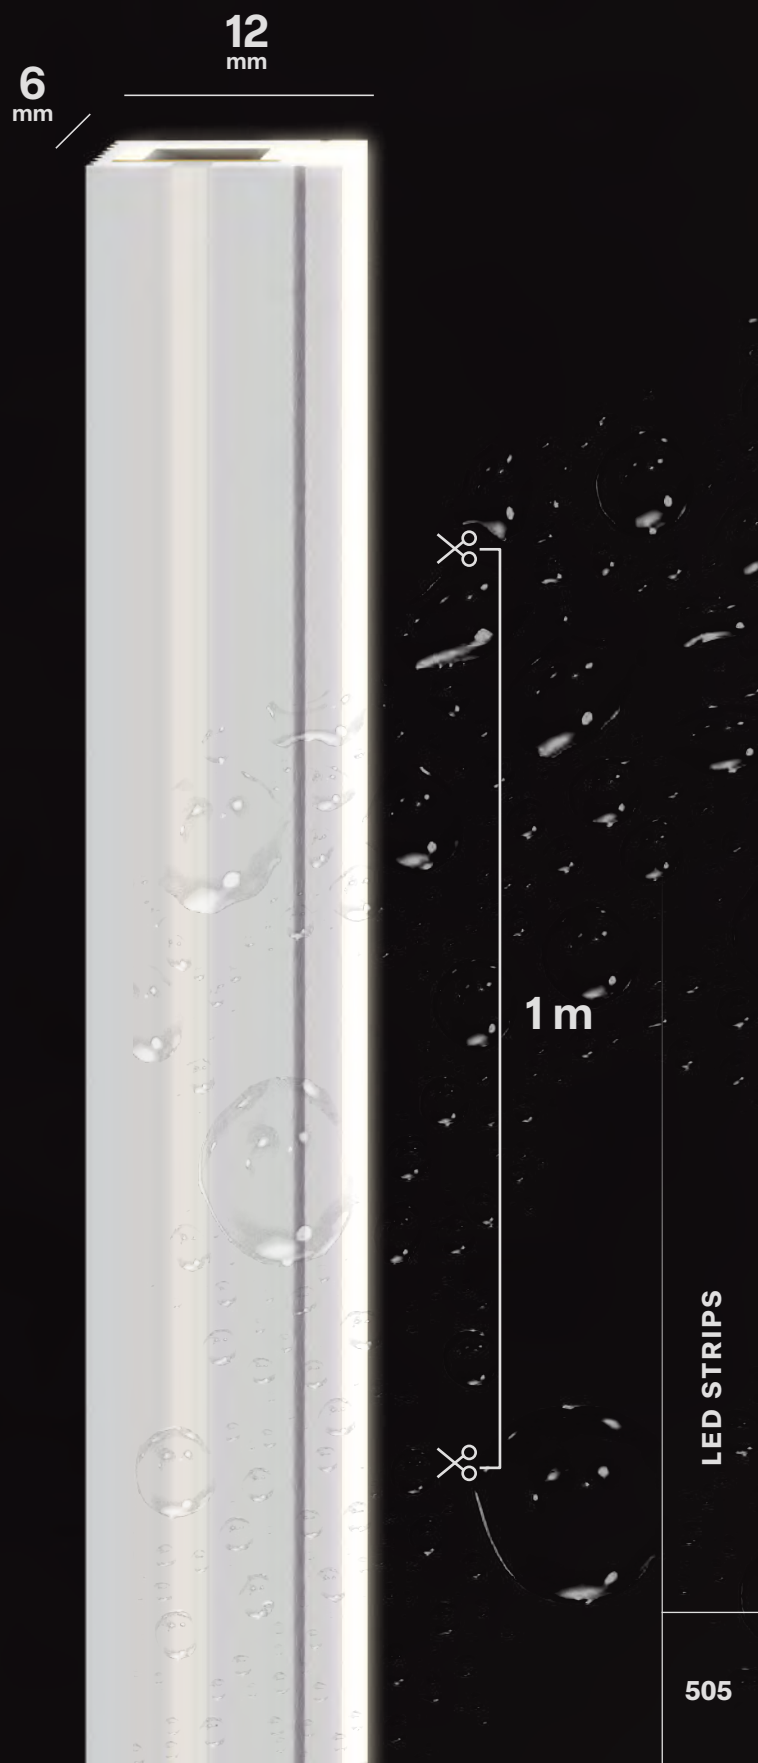

T0613SL

NEON LED

SIDE LIGHT

CRI >80

IP67

SIDE

3000K 250 lm/m	5 m	T0613SLC05
	10 m	T0613SLC10
	20 m	T0613SLC20
	50 m	T0613SLC50
4000K 270 lm/m	5 m	T0613SLN05
	10 m	T0613SLN10
	20 m	T0613SLN20
	50 m	T0613SLN50
6000K 290 lm/m	5 m	T0613SLF05
	10 m	T0613SLF10
	20 m	T0613SLF20
	50 m	T0613SLF50

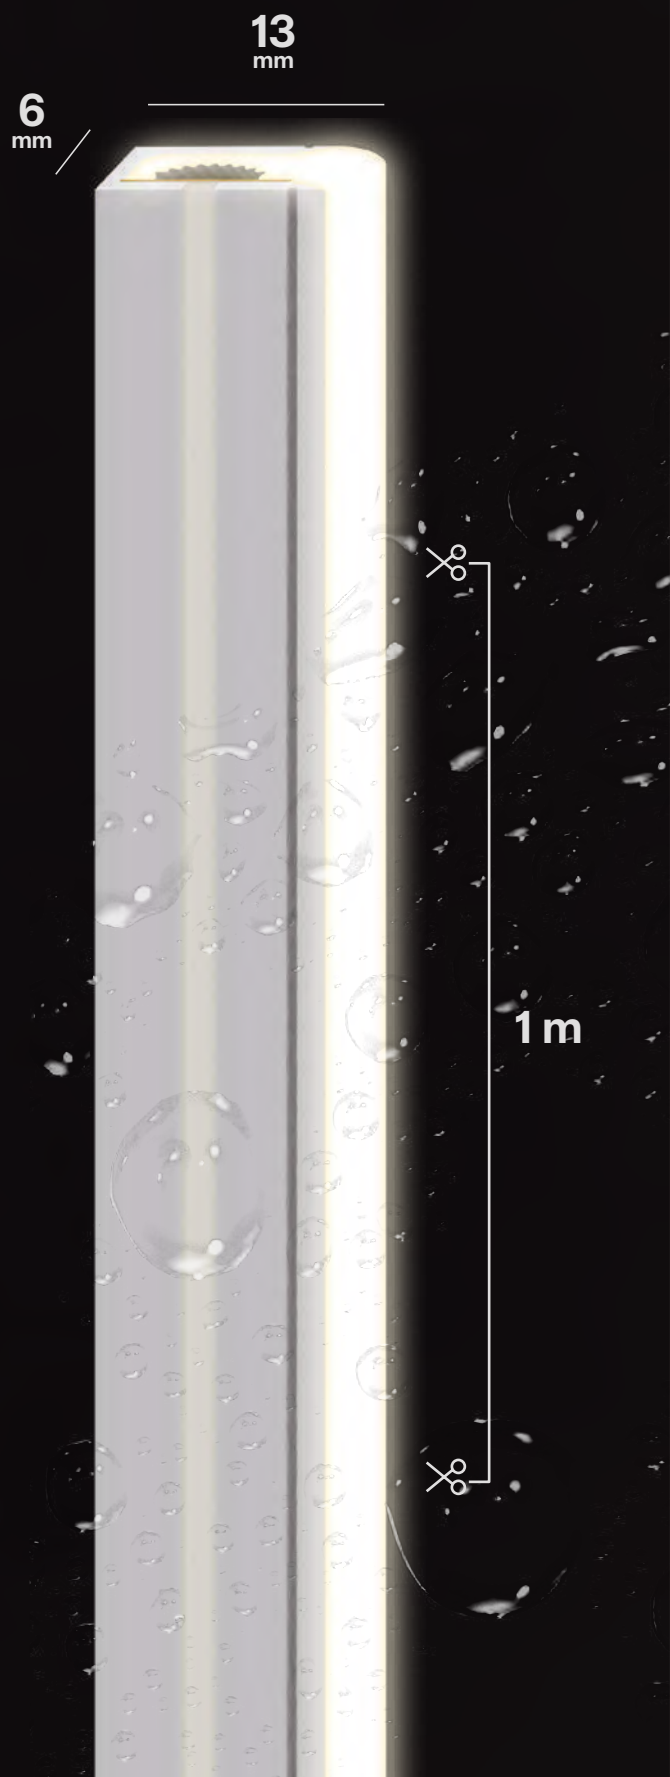

Supply	24 Vdc
LED number	120 Led/m
Power	12 W/m
Lumen Source	1000 lm/m
Protection Degree	IP67
LED type	2835
(CRI)	>80
Cover	Flex Silicone
Light angle	120 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	50 m

ACCESSORIES

CLIP AND CLOSING CAP FOR SIDE VIEW - 6x13	T0613SLACC001

T1212SL

SIDE LIGHT

CRI >80

IP67

SIDE

3000K 300 lm/m	5 m	T1212SLC05
	10 m	T1212SLC10
	20 m	T1212SLC20
	50 m	T1212SLC50
4000K 320 lm/m	5 m	T1212SLN05
	10 m	T1212SLN10
	20 m	T1212SLN20
	50 m	T1212SLN50
6000K 340 lm/m	5 m	T1212SLF05
	10 m	T1212SLF10
	20 m	T1212SLF20
	50 m	T1212SLF50

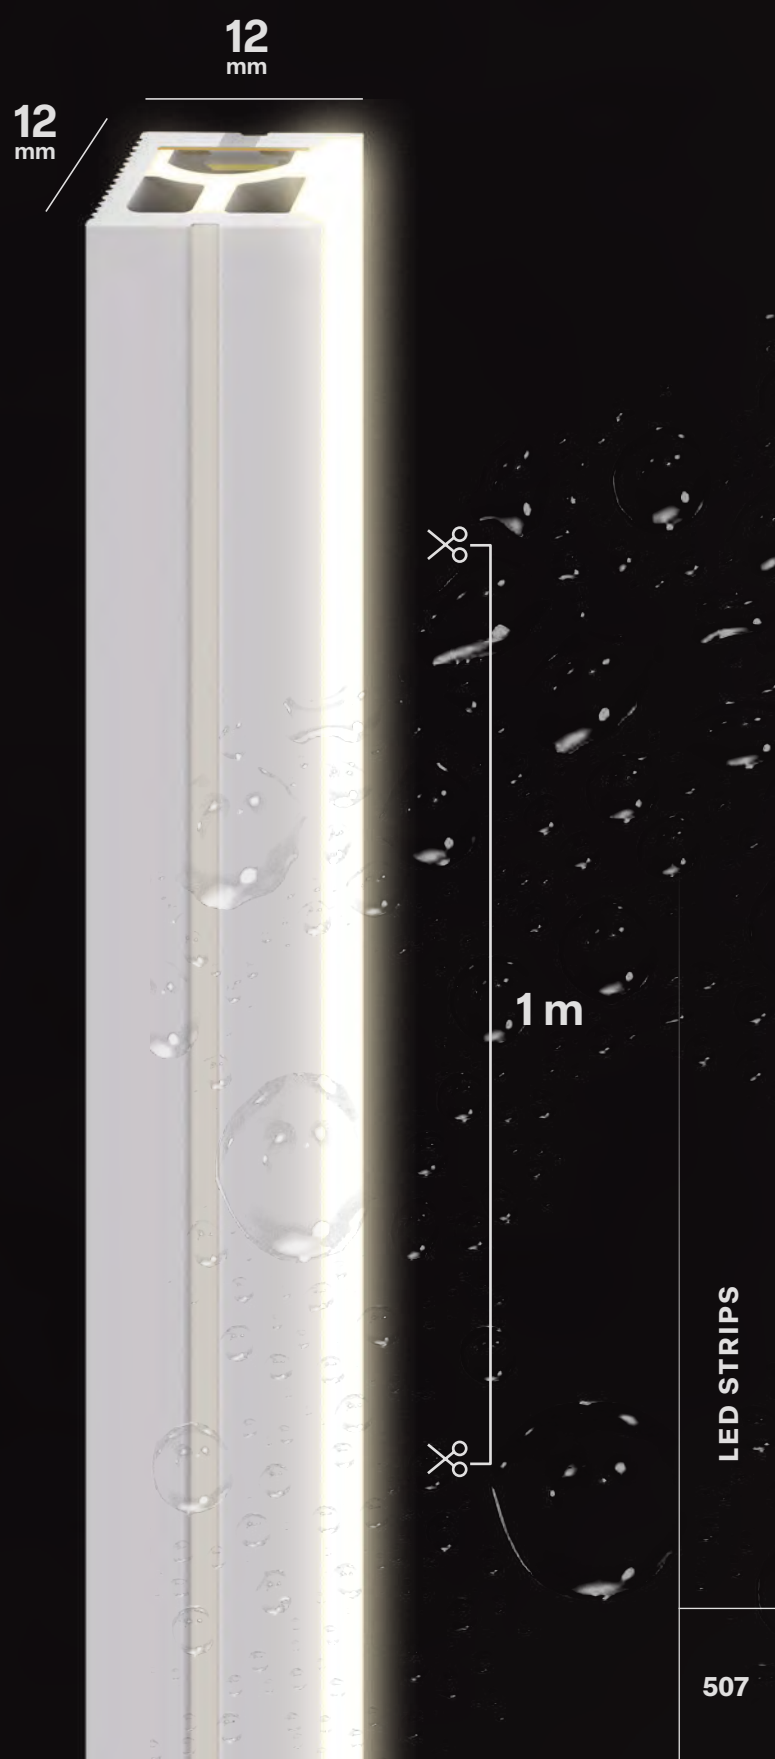

Supply	24 Vdc
LED number	120 Led/m
Power	9.6 W/m
Lumen Source	1000 lm/m
Protection Degree	IP67
LED type	2835
(CRI)	>80
Cover	Flex Silicone
Light angle	120 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	50 m

ACCESSORIES

CLIP AND CLOSING CAP FOR SIDE VIEW - 12x12 -	T1212SLACC01

T0513X

DIGITAL TOP LIGHT MULTICOLOR

IP67 TOP DIGITAL

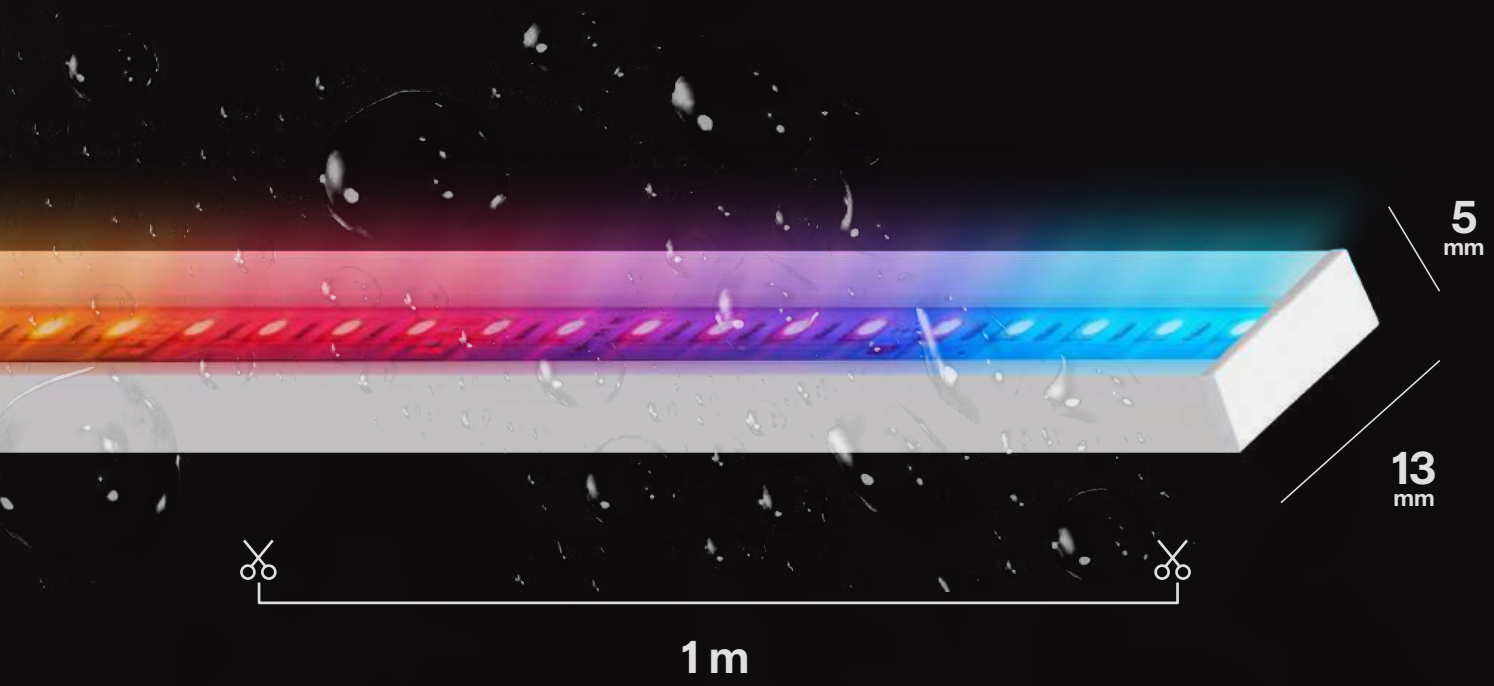

Supply	24 Vdc
LED number	60 Led/m
Power	14 W/m
Protection Degree	IP67
LED type	2835
(CRI)	-
Cover	Flex Silicone
Light angle	120 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	50 m

RGB	5 m	T0513X05
	10 m	T0513X10
	20 m	T0513X20
	50 m	T0513X50

ACCESSORIES

CLIP AND CLOSING CAP FOR SIDE VIEW - 5x13	T0513ACC001

T1212

TOP LIGHT

CRI >80

IP67

TOP

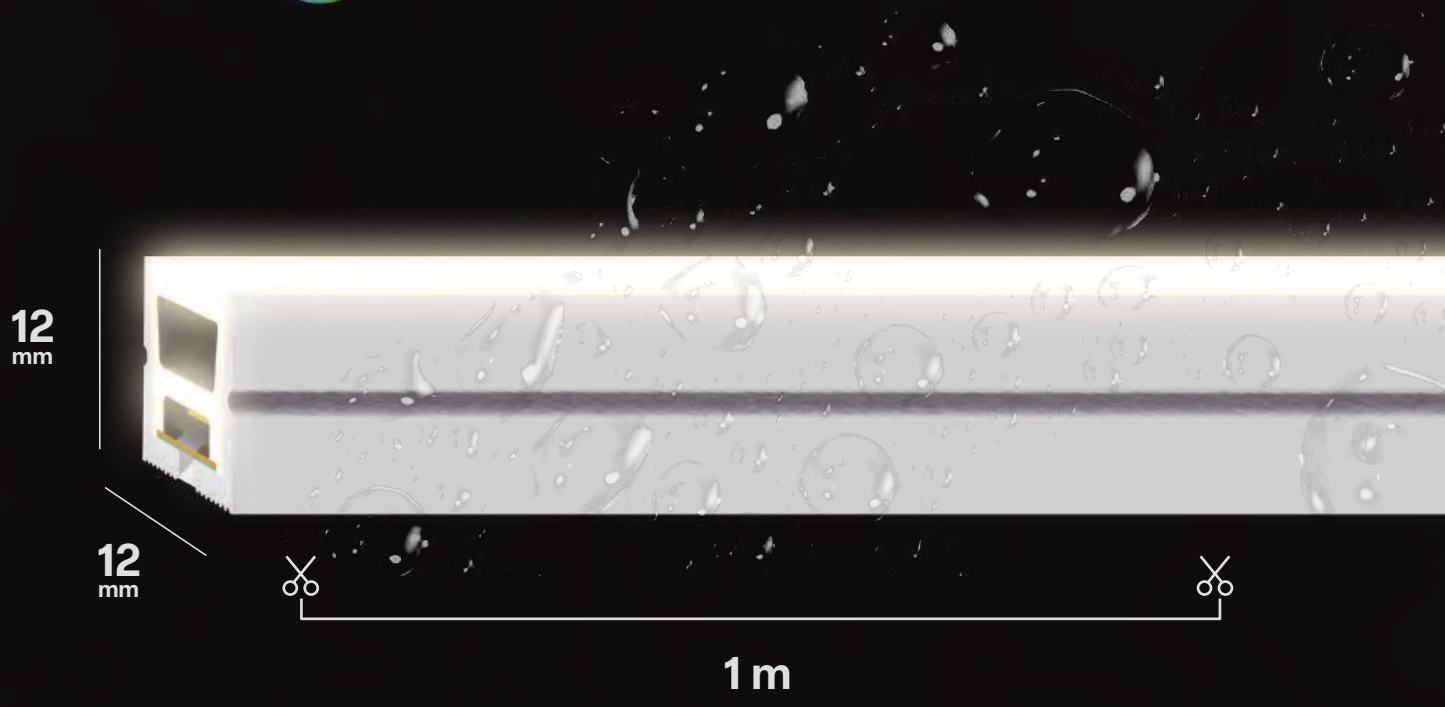

Supply	24 Vdc
LED number	120 Led/m
Power	9.6 W/m
Lumen Source	1000 lm/m
Protection Degree	IP67
LED type	2835
(CRI)	>80
Cover	Flex Silicone
Light angle	120 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	50 m

3000K, 450 lm/m	5 m	T1212C05
	10 m	T1212C10
	20 m	T1212C20
	50 m	T1212C50
4000K, 470 lm/m	5 m	T1212N05
	10 m	T1212N10
	20 m	T1212N20
	50 m	T1212N50
6000K, 490 lm/m	5 m	T1212F05
	10 m	T1212F10
	20 m	T1212F20
	50 m	T1212F50

ACCESSORIES

CLIP AND CLOSING CAP FOR TOP VIEW - 12x12	T1212ACC001

T1616

TOP LIGHT

CRI >80

IP67

TOP

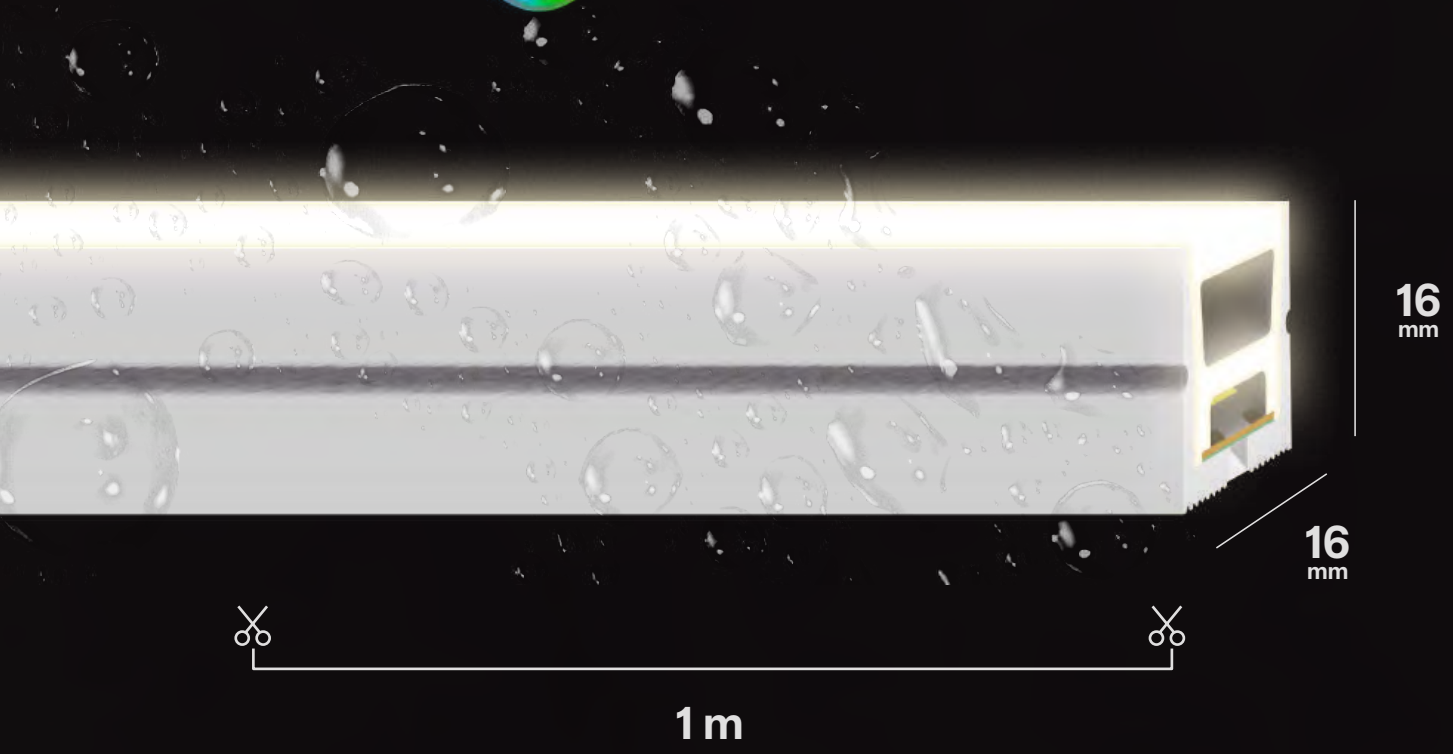

Supply	24 Vdc
LED number	120 Led/m
Power	12 W/m
Lumen Source	1000 lm/m
Protection Degree	IP67
LED type	2835
(CRI)	>80
Cover	Flex Silicone
Light angle	120 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	50 m

3000K, 450 lm/m	5 m	T1616C05
	10 m	T1616C10
	20 m	T1616C20
	50 m	T1616C50
4000K, 470 lm/m	5 m	T1616N05
	10 m	T1616N10
	20 m	T1616N20
	50 m	T1616N50
6000K, 490 lm/m	5 m	T1616F05
	10 m	T1616F10
	20 m	T1616F20
	50 m	T1616F50

ACCESSORIES

CLIP AND CLOSING CAP FOR TOP VIEW - 16x16	T1616ACC001

T1616X

TOP LIGHT MULTICOLOR

IP67 TOP

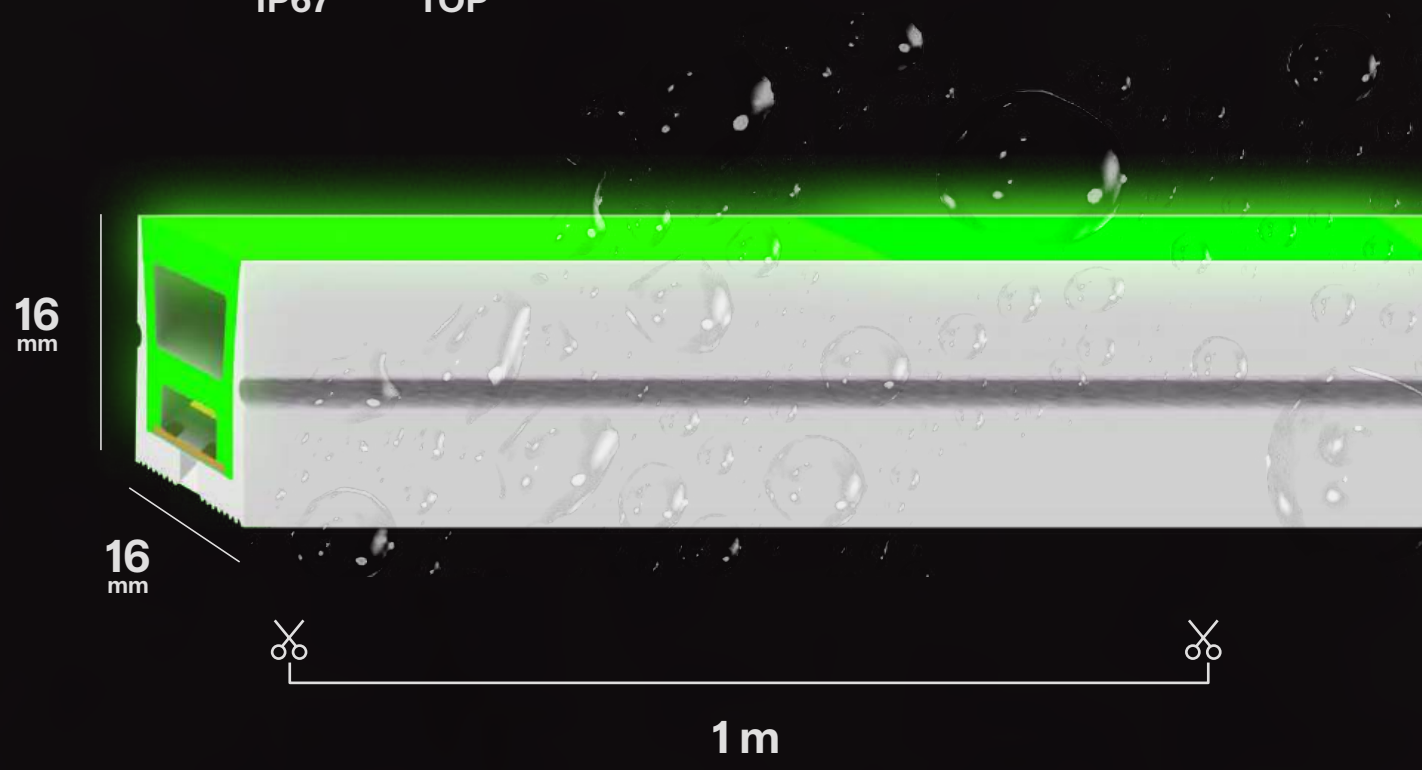

Supply	24 Vdc
LED number	120 Led/m
Power	9.6 W/m
Protection Degree	IP67
LED type	2835
(CRI)	-
Cover	Flex Silicone
Light angle	120 °
Connection	Free wires
Fixing	with Clip
Dimmable	Via controller
Max length in cascade	10 m

RGB	5 m	T1616X05

ACCESSORIES

CLIP AND CLOSING CAP FOR TOP VIEW - 16x16	T1616ACC001

220V AC STRIP LED

ER1058

AC STRIP LED 220V HIGH POWER

CRI >80

IP67

3000K / 1600 lm/m	25 m	ER1058C25
	50 m	ER1058C50
4000K / 1650 lm/m	25 m	ER1058N25
	50 m	ER1058N50
6000K / 1700 lm/m	25 m	ER1058F25
	50 m	ER1058F50

Supply	220 Vac
LED number	120 Led/m
Power	15 W/m
Protection Degree	IP67
LED type	2835
(CRI)	>80
Cover	Silicone
Light angle	120 °
Connection	Spina EU
Fixing	Adhesive 3M
Dimmable	Si tramite TRIAC
Max length in cascade	100 m

ACCESSORIES

JUNCTION CONNECTOR	ER1058A01
CLOSING CAP	ER1058A02
WALL FIXING CLIP	ER1058A03

ER2288

AC STRIP LED COB 220V

CRI >80

IP67

3000K, 900 lm/m	5 m	ER2288C05
	25 m	ER2288C25
	50 m	ER2288C50
4000K, 900 lm/m	5 m	ER2288N05
	25 m	ER2288N25
	50 m	ER2288N50
6000K, 900 lm/m	5 m	ER2288F05
	25 m	ER2288F25
	50 m	ER2288F50

220 Vac

10 W/m

228 Led/m

0,5 m

Chip COB

10,5 mm

5/25/50m

Supply	220 Vac
LED number	228 Led/m
Power	10 W/m
Protection Degree	IP67
LED type	COB
(CRI)	>80
Cover	Silicone
Light angle	120 °
Connection	Spina EU
Fixing	Adhesive 3M
Dimmable	Si tramite TRIAC
Max length in cascade	100 m

ACCESSORIES

POWER CABLE	ER2288A05
JUNCTION CONNECTOR	ER2288A01
CLOSING CAP	ER2288A02
WALL FIXING CLIP	ER2288A03

POWER SUPPLIES

IP20

CONSTANT VOLTAGE | SERIES APT

Output	Power	Input	Dimensions	Code
24 Vdc / 0.125 A	3 W	100-240 Vac	55,5x26x21 mm	APT003.24
24 Vdc / 0.25 A	6 W	100-240 Vac	60x44x23 mm	APT006.24
24 Vdc / 0.625 A	15 W	220-240 Vac	153x41x32 mm	APT015.24
24 Vdc / 1.66 A	40 W	220-240 Vac	160x20x58 mm	APT040.24
24 Vdc / 2.5 A	60 W	220-240 Vac	185x22x64 mm	APT061.24
24 Vdc / 3.33 A	80 W	220-240 Vac	170x57x32 mm	APT080.24
24 Vdc / 4.16 A	100 W	220-240 Vac	180x66x32 mm	APT100.24
24 Vdc / 6.25 A	150 W	220-240 Vac	205x71x35 mm	APT150.24
24 Vdc / 8.33 A	200 W	220-240 Vac	205x71x35 mm	APT200.24
24 Vdc / 10.41 A	250 W	220-240 Vac	210x80x32 mm	APT250.24
24 Vdc / 13.3 A	320 W	220-240 Vac	210x80x38 mm	APT320.24

IP20

CONSTANT VOLTAGE | SERIES AST

Output	Power	Input	Dimensions	Code
24 Vdc / 0.63 A	15 W	220-240 Vac	160x30x16 mm	AST016.24
24 Vdc / 3.13 A	75 W	220-240 Vac	305x30x17 mm	AST075.24
24 Vdc / 6.25 A	150 W	220-240 Vac	360X32X24 mm	AST150.24

IP20

CONSTANT VOLTAGE DALI PUSH | SERIES ASD

Output	Power	Input	Dimensions	Code
24 Vdc / 4.16 A	100 W	220-240 Vac	400x32x21,6 mm	ASD100.24D
24 Vdc / 8.33 A	200 W	220-240 Vac	450x32x23 mm	ASD200.24D
24 Vdc / 10 A	240 W	220-240 Vac	450x32x23 mm	ASD240.24D

IP20

CONSTANT VOLTAGE GRILLED | SERIES ALT

Output	Power	Input	Dimensions	Code
24 Vdc / 1.67 A	40 W	100-240 Vac	107x79x37 mm	ALT040.24
24 Vdc / 2.5 A	60 W	100-240 Vac	107x79x37 mm	ALT060.24
24 Vdc / 4.25 A	100 W	100-240 Vac	159x98x42 mm	ALT100.24
24 Vdc / 6.25 A	150 W	100-240 Vac	199x98x42 mm	ALT150.24
24 Vdc / 10 A	250 W	100-240 Vac	200x110x50 mm	ALT250.24
24 Vdc / 15 A	350 W	100-240 Vac	215x115x52 mm	ALT350.24
24 Vdc / 20.8 A	500 W	100-240 Vac	240x125x65 mm	ALT500.24

IP20

CONSTANT VOLTAGE GRILLED SLIM | SERIES ALS

Output	Power	Input	Dimensions	Code
24 Vdc / 2.5 A	60 W	110-240 Vac	161x40x35 mm	ALS060.24
24 Vdc / 4.25 A	100 W	110-240 Vac	190x50x37 mm	ALS100.24
24 Vdc / 6.25 A	150 W	110-240 Vac	200x60x38 mm	ALS150.24
24 Vdc / 10.41 A	250 W	110-240 Vac	225x70x40 mm	ALS250.24
24 Vdc / 15 A	350 W	110-240 Vac	222x68x41 mm	ALS350.24

IP20

CONSTANT VOLTAGE GRILLED MEANWELL | SERIES LRS

Output	Power	Input	Dimensions	Code
24 Vdc / 1.5 A	36 W	85-264 Vac	99x82x30 mm	MW-LRS-35-24
24 Vdc / 2.2 A	52.8 W	85-264 Vac	99x82x30 mm	MW-LRS-50-24
24 Vdc / 3.2 A	76.8 W	85-264 Vac	99x97x30 mm	MW-LRS-75-24
24 Vdc / 4.5 A	108 W	85-264 Vac	129x97x30 mm	MW-LRS-100-24
24 Vdc / 6.5 A	156 W	85-264 Vac	159x97x30 mm	MW-LRS-150-24

IP67

CONSTANT VOLTAGE | SERIES ALP

Output	Power	Input	Dimensions	Code
24 Vdc / 0.625 A	15 W	90-264 Vac	120x30x20 mm	ALP015.24
24 Vdc / 1.25 A	30 W	90-264 Vac	200x30x20 mm	ALP030.24
24 Vdc / 2.5 A	60 W	90-264 Vac	178x72x45 mm	ALP060.24
24 Vdc / 5 A	120 W	90-264 Vac	210x72x45 mm	ALP120.24
24 Vdc / 6.25 A	150 W	90-264 Vac	250x72x45 mm	ALP150.24
24 Vdc / 8.25 A	200 W	90-264 Vac	202x120x58 mm	ALP200.24

IP67

CONSTANT VOLTAGE MEANWELL | SERIES LPV

Output	Power	Input	Dimensions	Code
24 Vdc / 1.5 A	36 W	90-264 Vac	148x40x30 mm	MW-LPV-35-24
24 Vdc / 2.5 A	60 W	90-264 Vac	162x42x32 mm	MW-LPV-60-24
24 Vdc / 4.5 A	100 W	90-264 Vac	190x52x37 mm	MW-LPV-100-24
24 Vdc / 6.3 A	151 W	180-305 Vac	191x63x37 mm	MW-LPV-150-24

IP67

CONSTANT VOLTAGE | SERIES APP

Output	Power	Input	Dimensions	Code
24 Vdc / 0.125 A	3 W	110-240 Vac	51,5x26x21 mm	APP003.24
24 Vdc / 0.375 A	9 W	110-240 Vac	84x33x23 mm	APP009.24

IP20

CONSTANT CURRENT SELECTABLE | SERIES ATC

Output	Power	Input	Dimensions	Code
2~36 Vdc / 250~500 mA	1-9 W	90-264 Vac	68x25x22 mm	ATC009.2550
2~54 Vdc / 100~380 mA	1-20 W	90-264 Vac	108x52x22 mm	ATC020.1838
2~54 Vdc / 250~700 mA	1-20 W	90-264 Vac	108x52x22 mm	ATC020.2570

IP20

CONSTANT CURRENT | SERIES APC

Current	Voltage	Power	Input	Dimensions	Code
350 mA	3-22 Vdc	6 W	100-240 Vac	60x44x23 mm	APC006.350
	22-34 Vdc	12 W	220-240 Vac	90x40x24 mm	APC013.350
	33-57 Vdc	20 W	220-240 Vac	120x42x20 mm	APC021.350
500 mA	18-24 Vdc	12 W	220-240 Vac	90x40x24 mm	APC013.500
	28-40 Vdc	20 W	220-240 Vac	120x42x20 mm	APC021.500
650 mA	3-15 Vdc	6 W	100-240 Vac	60x44x23 mm	APC006.650
	15-31 Vdc	20 W	220-240 Vac	120x42x20 mm	APC021.650
1050 mA	20-37 Vdc	30 W	220-240 Vac	153x41x32 mm	APC036.1050
1400 mA	25-36 Vdc	50 W	220-240 Vac	180x52x30 mm	APC050.1400
	24-47 Vdc	65 W	220-240 Vac	123x75x30 mm	APC065.1400

IP20

CONSTANT CURRENT PUSH DIMMER | SERIES AVP

Output	Power	Input	Dimensions	Code
10~50 Vdc / 250~750 mA	5 -35 W	99-264 Vac	108x52x22 mm	AVP535.2570
2~53 Vdc / 250~900 mA	1 -33 W	99-264 Vac	103x57x21 mm	AVP135.2590
2~54 Vdc / 250~901 mA	2 -33 W	99-264 Vac	108x52x22 mm	AVP133.2590
2~54 Vdc / 300~1050 mA	2 -38 W	99-264 Vac	103x67x22 mm	AVP138.30105

IP20

CONSTANT CURRENT PUSH DIMMER DALI2 | SERIES ADP

Output	Power	Input	Dimensions	Code
2~43 Vdc / 150~900 mA	0 -25 W	99-264 Vac	111x22x52 mm	ADP025.1590
3~49 Vdc / 250~700 mA	1 -20 W	99-264 Vac	111x22x52 mm	ADP120.2570
2~74 Vdc / 350~1050 mA	1 -60 W	99-264 Vac	124x79x22 mm	ADP160.35105
2~54 Vdc / 300~1051 mA	1 -30 W	99-264 Vac	103x57x21 mm	ADP138.30105

IP20

CONSTANT CURRENT PUSH DIMMER TRIAC | SERIES ATP

Output	Power	Input	Dimensions	Code
2~48 Vdc / 150~500 mA	2 -24 W	198-264 Vac	166x34x46 mm	ATP024.30105
2~46 Vdc / 350~750 mA	0 -32 W	198-264 Vac	150x46x34 mm	ATP032.3575
5~48 Vdc / 250~900 mA	3 -20 W	198-264 Vac	108x52x22 mm	ATP0320.2590
2~43 Vdc / 1050~2100 mA	1 -50 W	198-264 Vac	163x35x83 mm	ATP150.105210

IP67

CONSTANT CURRENT | SERIES APP

Current	Voltage	Power	Input	Dimensions	Code
350 mA	3-12 Vdc	3 W	100-240 Vac	51,5x26x21 mm	APP003.350
	10-21 Vdc	6 W	100-240 Vac	60x35x23 mm	APP006.350
500 mA	3-7 Vdc	3 W	100-240 Vac	51,5x26x21 mm	APP003.500
	3-12 Vdc	6 W	100-240 Vac	60x35x23 mm	APP006.500
650 mA	3-5 Vdc	3 W	100-240 Vac	51,5x26x21 mm	APP003.650
	3-10 Vdc	6 W	100-240 Vac	60x35x23 mm	APP006.650

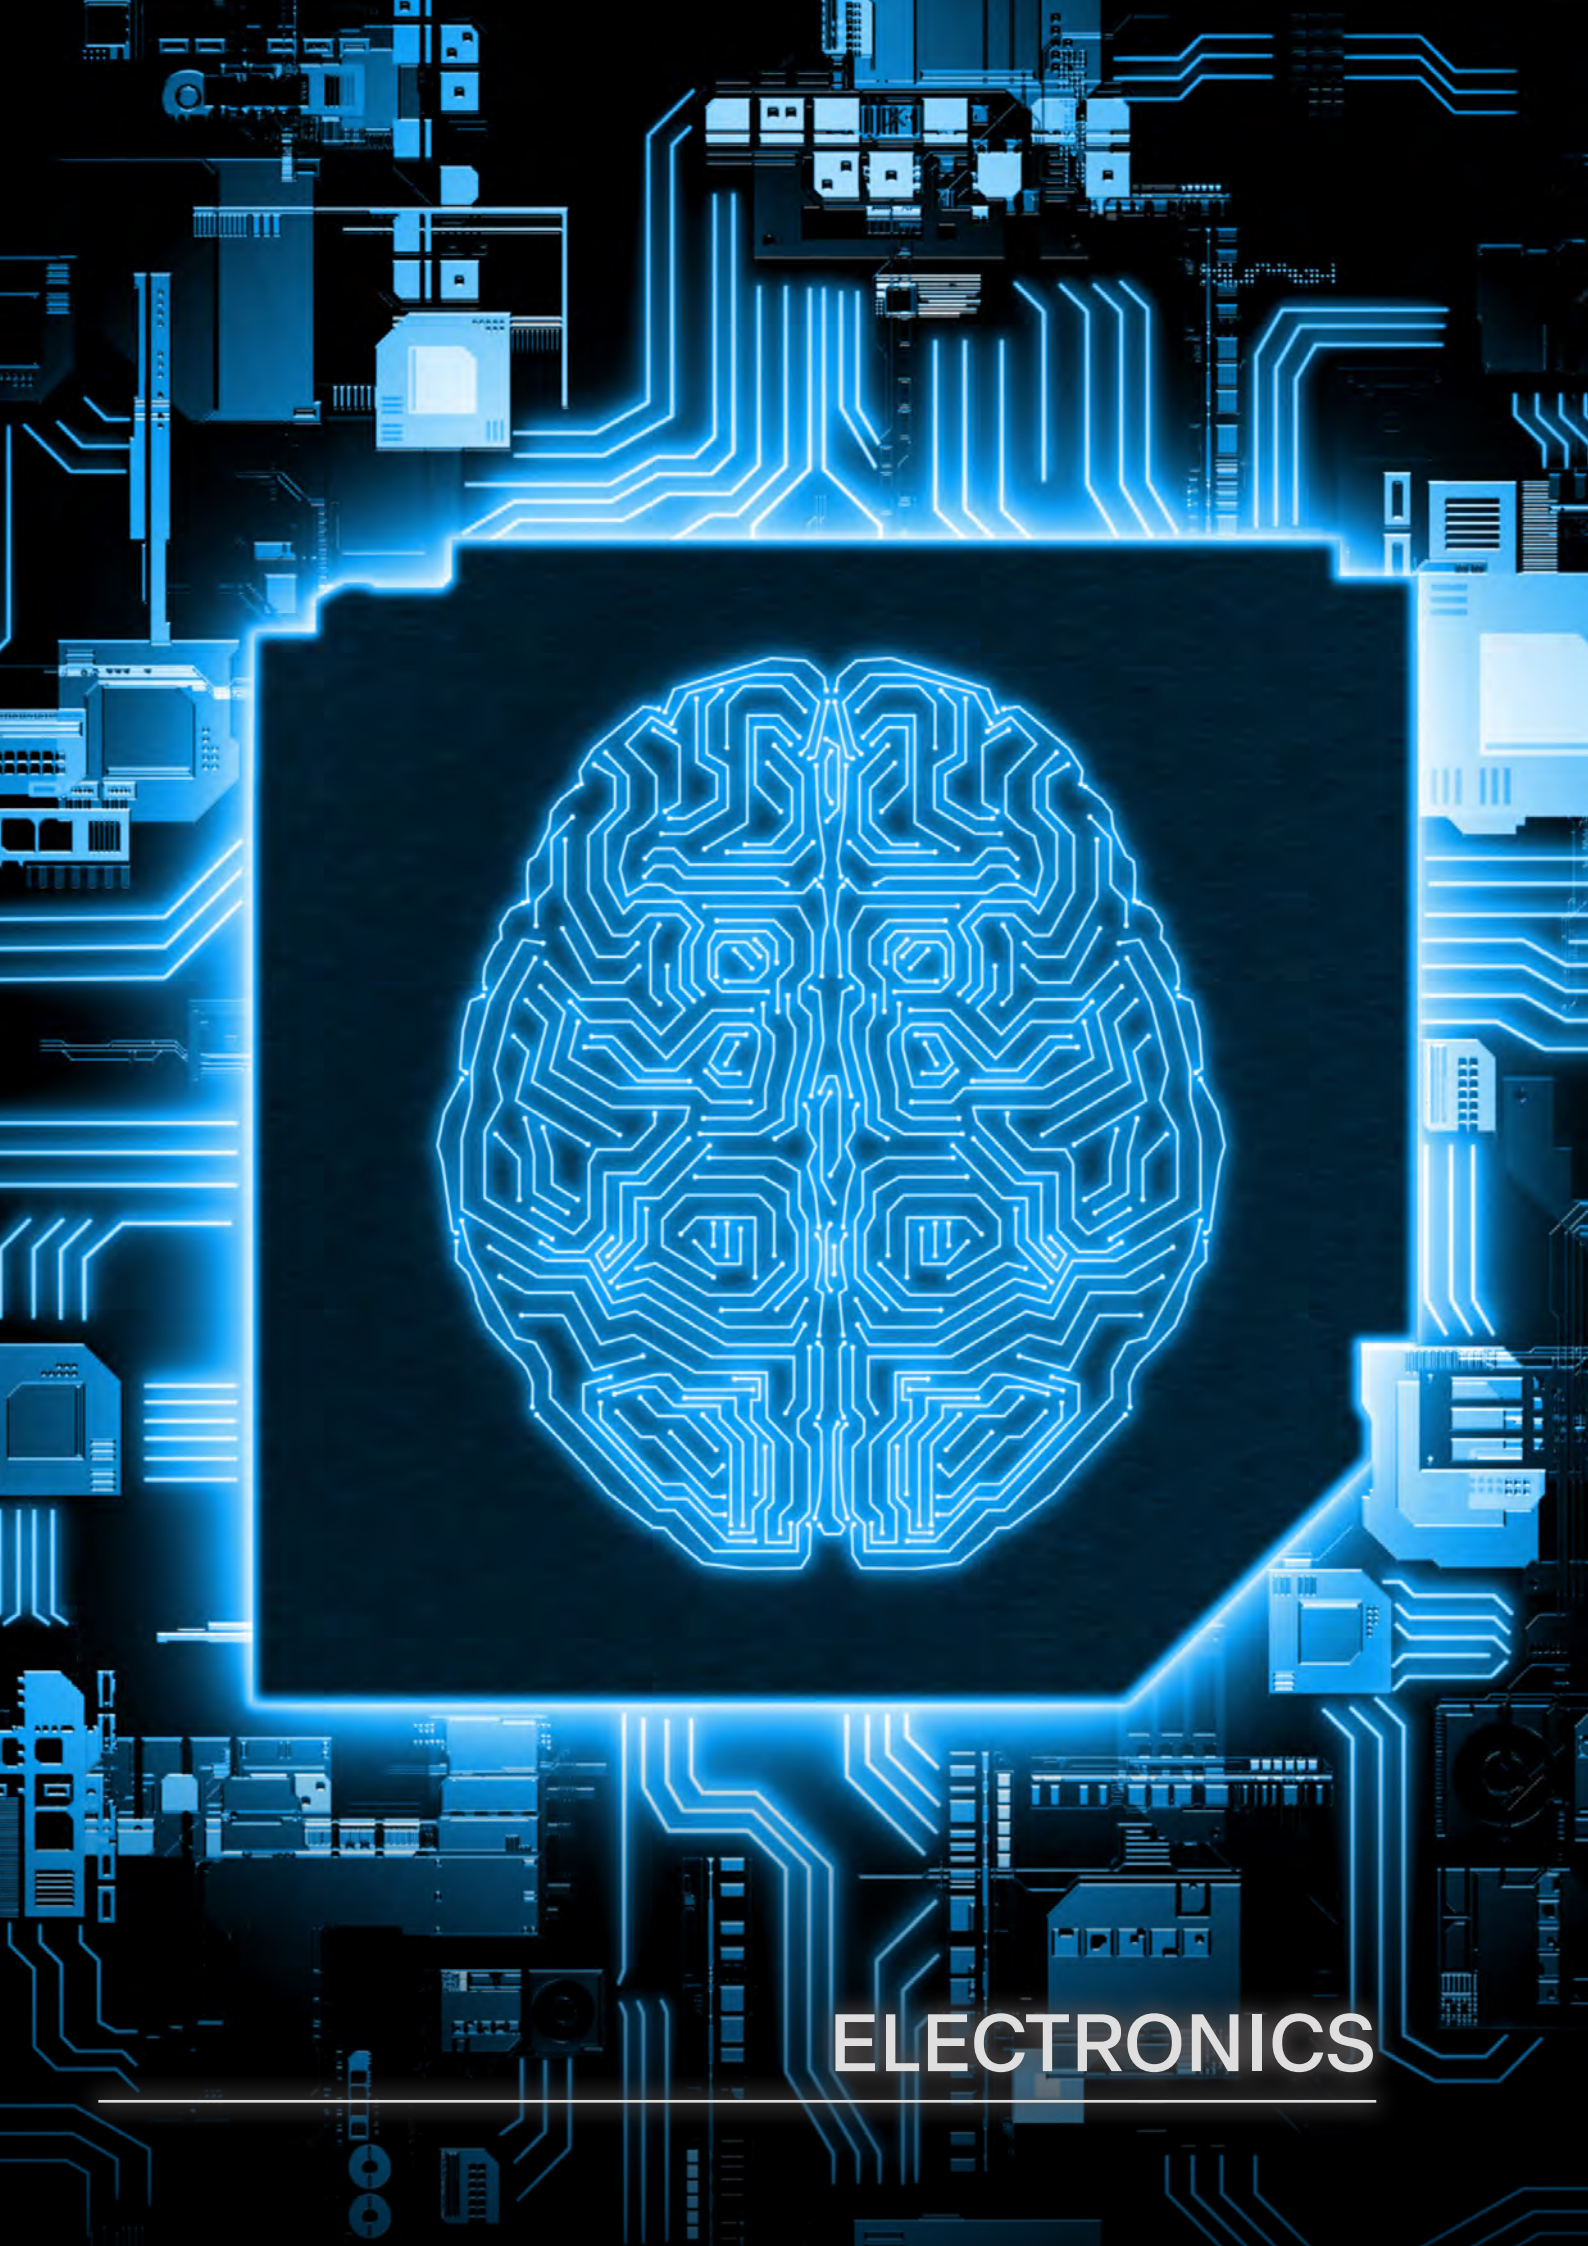

ELECTRONICS

MINI PUSH BUTTON DIMMER

MONOCOLOR

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	8 A	144 - 288 W	46x12 mm	DMR006A

MINI PUSH BUTTON DIMMER & RF

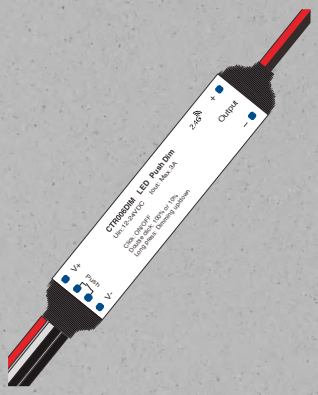

MONOCOLOR

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	3 A	75 W	60x14 mm	CTR006DIM

Additional accessories:

ADDITIONAL SINGLE-COLOR REMOTE	CTC112DIM
ADDITIONAL SINGLE-COLOR WALL-MOUNTED REMOTE	CTC213DIM

MINI PUSH CONTROLLER RGBW & RF

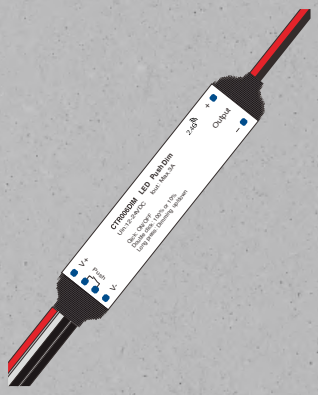

RGBW

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	4 A	75 W	60x14 mm	CTR006RGBW

Additional accessories:

RGBW ADDITIONAL REMOTE	CTC112RGBW
RGBW WALL-MOUNTED ADDITIONAL REMOTE	CTC213RGBW

DIMMER KIT WITH REMOTE

MONOCOLOR

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	8 A	40 - 192 W	97x18x33 mm	CTR113DIM

Additional accessories:

ADDITIONAL SINGLE-COLOR REMOTE	CTC112DIM
ADDITIONAL SINGLE-COLOR WALL-MOUNTED REMOTE	CTC213DIM

the value of the Current is given by the sum of the individual Channels

DIMMER KIT WITH REMOTE

MONOCOLOR

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	8 A	40 - 192 W	97x18x33 mm	CTR113DIMS

Additional accessories:

ADDITIONAL SINGLE-COLOR REMOTE	CTC112DIM
ADDITIONAL SINGLE-COLOR WALL-MOUNTED REMOTE	CTC213DIM

CONTROLLER KIT CCT WITH REMOTE

CCT

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	10 A	120 - 240 W	97x18x33 mm	CTR114CCT

Additional accessories:

CCT ADDITIONAL REMOTE	CTC114CCT
CCT WALL-MOUNTED ADDITIONAL REMOTE	CTC213CCT

CONTROLLER KIT RGB WITH REMOTE

RGB

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	12 A	144 - 288 W	97x18x33 mm	CTR112RGB

CONTROLLER KIT RGBW WITH REMOTE

RGBW

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	16 A	144 - 288 W	114x38x20 mm	CTR115RGBW

Additional accessories:

RGBW ADDITIONAL REMOTE	CTC112RGBW
RGBW WALL-MOUNTED ADDITIONAL REMOTE	CTC213RGBW

the value of the Current is given by the sum of the individual Channels

CONTROLLER KIT RGB & CCT WITH REMOTE

RGB + CCT

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	15 A	180 - 360 W	114x38x20 mm	CTR115RGBC

Additional accessories:

RGB+CCT ADDITIONAL REMOTE CONTROL	CTC115RGBC
ADDITIONAL RGB+CCT WALL REMOTE CONTROL	CTC215RGBC

PUSH DIMMER TRIAC 230V

MONOCOLOR 230V

80-230 Vac

Zone	Voltage	Current	Power	Dimensions	Code
80-230 Vac		2,5 A	500 W	110x67x48 mm	CTR214DINTR

CONTROLLER RGBW

RGBW

12-36 Vdc

Voltage	Current	Power	Dimensions	Code
12-36 Vdc	20 A	60 - 180 W	175x45x27 mm	CTR216

Additional accessories:

RGBW ADDITIONAL REMOTE	CTC112RGBW
RGBW WALL-MOUNTED ADDITIONAL REMOTE	CTC213RGBW

CONTROLLER RGBW IP67

RGBW

12-36 Vdc

Voltage	Current	Power	Dimensions	Code
12-36 Vdc	20 A	60 - 180 W	176x78x38 mm	CTR220IP

Additional accessories:

RGBW ADDITIONAL REMOTE	CTC112RGBW
RGBW WALL-MOUNTED ADDITIONAL REMOTE	CTC213RGBW

the value of the Current is given by the sum of the individual Channels

CONTROLLER FOR DIGITAL RUNNING LED STRIP

MONOCOLOR DIGITAL

12-24 Vdc

DIGITAL

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	4 A	100 W	60x15 mm	CTR901DGT

CONTROLLER KIT WITH REMOTE FOR DIGITAL RUNNING STRIP

MONOCOLOR DIGITAL

12-24 Vdc

DIGITAL

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	4 A	100 W	60x15 mm	CTR903DGT

KIT CONTROLLER RGBW DIGITAL WITH REMOTE

RGBW DIGITAL

12-24 Vdc

DIGITAL

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	4 A	100 W	55x26x12 mm	CTR208DGTW

INTERFACE DMX512 RGBW

RGBW

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	20 A	240 - 480 W	170x50x23 mm	CTR215

the value of the Current is given by the sum of the individual Channels

CONTROLLER FOR DIGITAL STRIP WITH PIR SENSOR FOR AISLES

MONOCOLOR DIGITAL

5-24 Vdc

Out	Voltage	Current	Power	Dimensions	Code
2	5-24 Vdc	7,5A x Out	75 - 360 W	175x120x35 mm	CTR209PIR

CONTROLLER FOR DIGITAL STRIP WITH SENSORS FOR STAIRS

RGB

5-24 Vdc

Out	Voltage	Current	Power	Dimensions	Code
32	5-24 Vdc	1A x Out	5 - 24 W	213x130x45 mm	CTR210

PUSH DIMMER 8-53V

MONOCOLOR

8-53 Vdc

Voltage	Current	Power	Dimensions	Code
8-53 Vdc	12 A	96-636 W	48x48x22.8 mm	CTNWPU8-53V

SMART CONTROLLER FOR DIGITAL LED STRIP SPI CUSTOMIZABLE

Monocolore/CCT/ RGB/RGBW/ RGB+CCT Digitale

5-24 Vdc

DIGITAL

Voltage	Current	Power	Dimensions	Code
5-24 Vdc	15 A	75-360 W	48x48x22.8 mm	CTNWSPI5-24V

the value of the Current is given by the sum of the individual Channels

RF SINGLE-COLOR REMOTE

MONOCOLOR

2.4 GHz

Zone	Distance	Power Supply	Dimensions	Code
4	30 m	Battery	58.5x9x107 mm	CTC112DIM

Compatible with:

SINGLE-COLOR CONTROLLER KIT	CTR113DIM
SINGLE-COLOR CONTROLLER KIT	CTR113DIMS

RF CCT REMOTE

CCT

2.4 GHz

Zone	Distance	Power Supply	Dimensions	Code
4	30 m	Battery	58.5x9x107 mm	CTC114CCT

Compatible with:

CCT CONTROLLER KIT	CTR114CCT

RF RGBW REMOTE

RGBW

2.4 GHz

Zone	Distance	Power Supply	Dimensions	Code
4	30 m	Battery	58.5x9x107 mm	CTC112RGBW

Compatible with:

RGBW CONTROLLER KIT	CTR115RGBW

RF RGB+CCT REMOTE

RGB + CCT

2.4 GHz

Zone	Distance	Power Supply	Dimensions	Code
4	30 m	Battery	58.5x9x107 mm	CTC115RGBC

Compatible with:

RGB+CCT CONTROLLER KIT	CTR115RGBC

RF REMOTE WITH SINGLE-COLOR PANEL

MONOCOLOR | 2.4 GHz | DMX | Box 503

Zone	Distance	Power Supply	Dimensions	Code
4	30 m	85 - 265 Vac	120x37x80 mm	CTC213DIM

Compatible with:

SINGLE-COLOR CONTROLLER KIT	CTR113DIM
SINGLE-COLOR CONTROLLER KIT	CTR113DIMS

RF REMOTE WITH CCT PANEL

CCT | 2.4 GHz | DMX | Box 503

Zone	Distance	Power Supply	Dimensions	Code
4	30 m	85 - 265 Vac	120x37x80 mm	CTC213CCT

Compatible with:

CCT CONTROLLER KIT	CTR114CCT

RF REMOTE WITH RGBW PANEL

RGBW | 2.4 GHz | DMX | Box 503

Zone	Distance	Power Supply	Dimensions	Code
4	30 m	85 - 265 Vac	120x37x80 mm	CTC213RGBW

Compatible with:

RGBW CONTROLLER KIT	CTR115RGBW

RF REMOTE WITH RGB+CCT PANEL

RGB + CCT | 2.4 GHz | DMX | Box 503

Zone	Distance	Power Supply	Dimensions	Code
4	30 m	85 - 265 Vac	120x37x80 mm	CTC215RGBC

Compatible with:

RGB+CCT CONTROLLER KIT	CTR115RGBC

PUSH DIMMER TRIAC DALI

MONOCOLOR 230V

80-230 Vac

Voltage	Current	Power	Dimensions	Code
80-230 Vac	2.5 A	500 W	105x90x58 mm	CTNW225W
80-230 Vac	4 A	1000 W	105x90x58 mm	CTNW221KW

PUSH DIMMER TRIAC DALI

MONOCOLOR 230V

80-230 Vac

Voltage	Current	Power	Dimensions	Code
80-230 Vac	1 A	230 W	45x40x22 mm	CTNWPU230

TOUCH BUTTON ON/OFF FOR PROFILE



MONOCOLOR

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	5 A	60 - 120 W	50x10x12 mm	S03N

TOUCH BUTTON ON/OFF AND DIMMER FOR PROFILE



MONOCOLOR

12-24 Vdc

Voltage	Current	Power	Dimensions	Code
12-24 Vdc	5 A	60 - 120 W	50x10x12 mm	S03D

The drawings, dimensions, materials and colors
in this catalog are intended as indicative.
In the interest of its customers, Dogi led reserves the right
to modify the products at any time
without prior notice.

Graphic Design, Creativity and Art Direction
by Kon.El.Co.S.pA.

ALL RIGHTS RESERVED

MISTO
Carta | A sostegno della gestione forestale responsabile
FSC® C008870

DOWNLOAD
THE CATALOG

DOWNLOAD
THE PRICE-LIST

Milano - ITALY - www.dogiled.it