





CD006

Descrizione


Carrabile da esterno con fissaggio diretto alla controcassa (in dotazione) senza dover aprire il prodotto, cavo in neoprene per un semplice collegamento in parallelo



POWER/m
<18W






Grado IP	IP67
CRI	Ra>90
Lumen	1680lm , 2010lm , 2520lm
Watt	15,0W , 18,0W , 27,0W , 24,0W
Tipo Led	XPE
Marca Led	CREE
Gradi lente	120° , 45° , Asimmetrica , Wallwasher Asimmetrica , Wallwasher , 08° , 25°
Alimentazione	24,0Vdc , 350,0mA
Foro	160mm
Confezione	Box
Garanzia	2 years
Finiture	Acciaio

Disegno tecnico

Confronto modelli

	Finitura	Alimentatore input	Numero Led	Colore luce	Gradi lente	Lumen	Watt	Grado IP
CD006I246C00	Acciaio	24,0Vdc	6	Warm White, 3100K	120°	1680lm	15,0W	IP67

CD006I246C45	Acciaio	24,0Vdc	6	Warm White, 3100K	45°	1680lm	15,0W	IP67
CD006I246CAS	Acciaio	24,0Vdc	9	Warm White, 3100K	Asimmetrica	1680lm	15,0W	IP67
CD006I246CWA	Acciaio	24,0Vdc	9	Warm White, 3100K	Wallwasher Asimmetrica	1680lm	15,0W	IP67
CD006I246CWW	Acciaio	24,0Vdc	9	Warm White, 3100K	Wallwasher	1680lm	15,0W	IP67
CD006I246F00	Acciaio	24,0Vdc	6	Cold White, 6200K	120°	1680lm	15,0W	IP67
CD006I246F45	Acciaio	24,0Vdc	6	Cold White, 6200K	45°	1680lm	15,0W	IP67
CD006I246FAS	Acciaio	24,0Vdc	9	Cold White, 6200K	Asimmetrica	1680lm	15,0W	IP67
CD006I246FWA	Acciaio	24,0Vdc	9	Cold White, 6200K	Wallwasher Asimmetrica	1680lm	15,0W	IP67
CD006I246FWW	Acciaio	24,0Vdc	9	Cold White, 6200K	Wallwasher	1680lm	15,0W	IP67
CD006I246G00	Acciaio	24,0Vdc	6	Warm White, 2700K	120°	1680lm	15,0W	IP67
CD006I246G45	Acciaio	24,0Vdc	6	Warm White, 2700K	45°	1680lm	15,0W	IP67
CD006I246GAS	Acciaio	24,0Vdc	9	Warm White, 2700K	Asimmetrica	1680lm	15,0W	IP67
CD006I246GWA	Acciaio	24,0Vdc	9	Warm White, 2700K	Wallwasher Asimmetrica	1680lm	15,0W	IP67
CD006I246GWW	Acciaio	24,0Vdc	9	Warm White, 2700K	Wallwasher	1680lm	15,0W	IP67
CD006I246N00	Acciaio	24,0Vdc	6	Neutral White, 4100K	120°	1680lm	15,0W	IP67
CD006I246N45	Acciaio	24,0Vdc	6	Neutral White, 4100K	45°	1680lm	15,0W	IP67
CD006I246NAS	Acciaio	24,0Vdc	9	Neutral White, 4100K	Asimmetrica	1680lm	15,0W	IP67
CD006I246NWA	Acciaio	24,0Vdc	9	Neutral White, 4100K	Wallwasher Asimmetrica	1680lm	15,0W	IP67
CD006I246NWW	Acciaio	24,0Vdc	9	Neutral White, 4100K	Wallwasher	1680lm	15,0W	IP67
CD006I246Y45	Acciaio	24,0Vdc	6	RGB	45°		18,0W	IP67
CD006I247CWW	Acciaio	24,0Vdc	7	Warm White, 3100K	Wallwasher	2010lm	27,0W	IP67
CD006I249C00	Acciaio	24,0Vdc	9	Warm White, 3100K	120°	2520lm	24,0W	IP67
CD006I249C45	Acciaio	24,0Vdc	9	Warm White, 3100K	45°	2520lm	24,0W	IP67
CD006I249CAS	Acciaio	24,0Vdc	9	Warm White, 3100K	Asimmetrica	2520lm	24,0W	IP67
CD006I249CWA	Acciaio	24,0Vdc	9	Warm White, 3100K	Wallwasher Asimmetrica	2520lm	24,0W	IP67
CD006I249CWW	Acciaio	24,0Vdc	9	Warm White, 3100K	Wallwasher	2520lm	24,0W	IP67
CD006I249F00	Acciaio	24,0Vdc	9	Cold White, 6200K	120°	2520lm	24,0W	IP67
CD006I249F45	Acciaio	24,0Vdc	9	Cold White, 6200K	45°	2520lm	24,0W	IP67
CD006I249FAS	Acciaio	24,0Vdc	9	Cold White, 6200K	Asimmetrica	2520lm	24,0W	IP67
CD006I249FWA	Acciaio	24,0Vdc	9	Cold White, 6200K	Wallwasher Asimmetrica	2520lm	24,0W	IP67
CD006I249FWW	Acciaio	24,0Vdc	9	Cold White, 6200K	Wallwasher	2520lm	24,0W	IP67
CD006I249G00	Acciaio	24,0Vdc	9	Warm White, 2700K	120°	2520lm	24,0W	IP67
CD006I249G45	Acciaio	24,0Vdc	9	Warm White, 2700K	45°	2520lm	24,0W	IP67
CD006I249GAS	Acciaio	24,0Vdc	9	Warm White, 2700K	Asimmetrica	2520lm	24,0W	IP67
CD006I249GWA	Acciaio	24,0Vdc	9	Warm White, 2700K	Wallwasher Asimmetrica	2520lm	24,0W	IP67
CD006I249GWW	Acciaio	24,0Vdc	9	Warm White, 2700K	Wallwasher	2520lm	24,0W	IP67
CD006I249N00	Acciaio	24,0Vdc	9	Neutral White, 4100K	120°	2520lm	24,0W	IP67
CD006I249N45	Acciaio	24,0Vdc	9	Neutral White, 4100K	45°	2520lm	24,0W	IP67
CD006I249NAS	Acciaio	24,0Vdc	9	Neutral White, 4100K	Asimmetrica	2520lm	24,0W	IP67
CD006I249NWA	Acciaio	24,0Vdc	9	Neutral White, 4100K	Wallwasher Asimmetrica	2520lm	24,0W	IP67
CD006I249NWW	Acciaio	24,0Vdc	9	Neutral White, 4100K	Wallwasher	2520lm	24,0W	IP67
CD006I359Y08	Acciaio	350,0mA	9	RGB	08°		24,0W	IP67
CD006I359Y25	Acciaio	350,0mA	9	RGB	25°		24,0W	IP67
CD006I359Y45	Acciaio	350,0mA	9	RGB	45°		24,0W	IP67

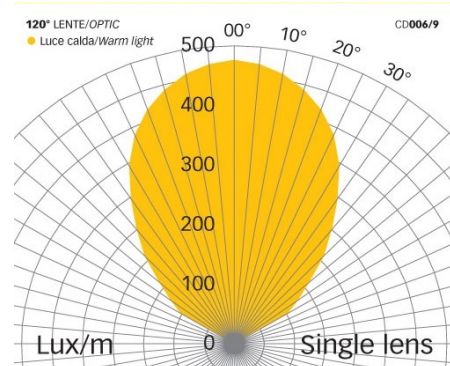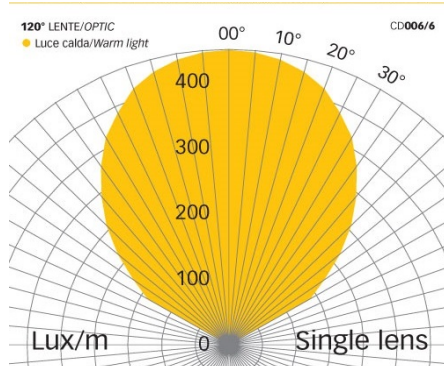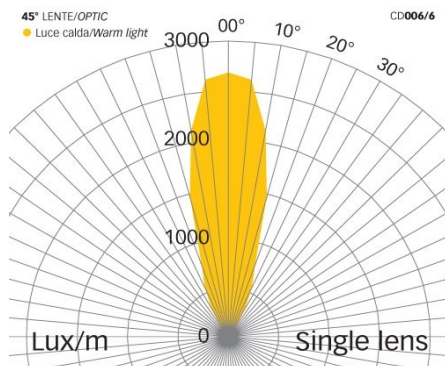Fotometria



Accessori

Accessori inclusi



9800500015
Controcassa per CD006 Ø
165mm

Accessori non inclusi



ALP015.24
Alim. in tensione IP67 24Vdc,
15W



ALP030.24
Alim. in tensione IP67 24Vdc,
30W



ALP060.24
Alim. in tensione IP67 24Vdc,
60W



ALP120.24
Alim. in tensione IP67 24Vdc,
120W



ALP150.24
Alim. in tensione IP67 24Vdc,
150W

MAT_PRIME



9800406606
Filtro antiabbagliamento per
CD006 diam. 112 mm - h. 3mm